

Series 1007.60

- Universal field of application
- Compact design
- Short travel
- Contacting of assembled PCBs

Mechanical Data

Center	1.27 mm/50 mil
Temperature Range	-30 °C - +120 °C
Full Travel	2.54 mm
Pre-loaded Spring Force	0.20/ 0.30 N
Spring Force at Full Travel	0.80/ 1.50 N

Electrical Data

Max. Current Rating	3.0 A
Typical Continuity Resistance	<= 50 mOhm

Materials

Barrel	Bronze, gold-plated
Spring	Spring Steel, gold-plated
Plunger	CuBe, rhodium plated
Receptacle	Bronze, gold-plated
Wire AWG 30 (Blue)	Copper, silver-plated, insulated

Recommended Diameter of Drill


HP 2361.1 (Trolitax)	0.87 mm
with pressed-in Ring	0.95 mm
HGW 2372	0.87 mm
with pressed-in Ring	0.95 mm

Tip style - Diameter - Plating




B	E	G3	K
0.50C Rh	0.80C Rh	0.50C Rh	0.90C Rh

1007.60

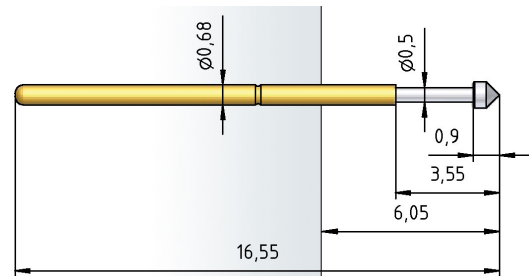

H 1007.60 V700

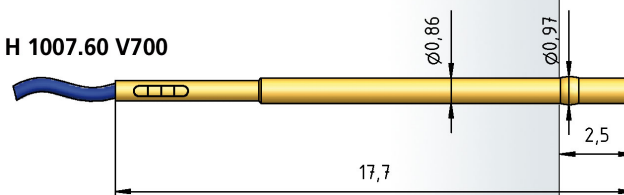

How to Order

1007 .60 - K - 0.8 N - Rh - 0.9 C
1 2 3 4 5 6 7

1. Series 2. Variant 3. Tip Style
 4. Spring Force 5. Tip Plating 6. Tip Diameter
 7. Tip Material (only for CuBe)