

A COMPANY IN THE PHOENIX MECANO GROUP

The Phoenix Mecano Group is a technological enterprise which operates around the world and is represented on the international growth markets. With its three building technology, mechanical components and ELCOM / EMS divisions, the company is the leader in many markets. Machinery and plant engineering, measurement and control technology, electrical engineering, automotive and rail engineering, energy technology, medical technology, aerospace technology, as well as the home and hospital care sector, are important fields of application.

GLOBAL PRESENCE

With 61 locations on every continent, we and our international workforce are close to our customers and guarantee efficient production, resource-friendly logistics and market-driven solutions.

TEST PROBES



TEST PROBES

Quality Down to the Tiniest Detail




WE COMBINE PRECISION, INNOVATION AND RELIABILITY FOR YOUR BENEFIT.

PTR HARTMANN is responding to the globalisation of markets with an expanded distribution network. In over 50 countries worldwide, qualified personnel ensure that our products and services are always available to customers.

Areas of Operation

- Test Probes for PCB and cable test
- Interface Pin Blocks
- Integrated Connection System
- PCB Terminal Blocks and Multi-Connector Systems
- DIN Rail Terminal Blocks
- Customer-specific Inductors

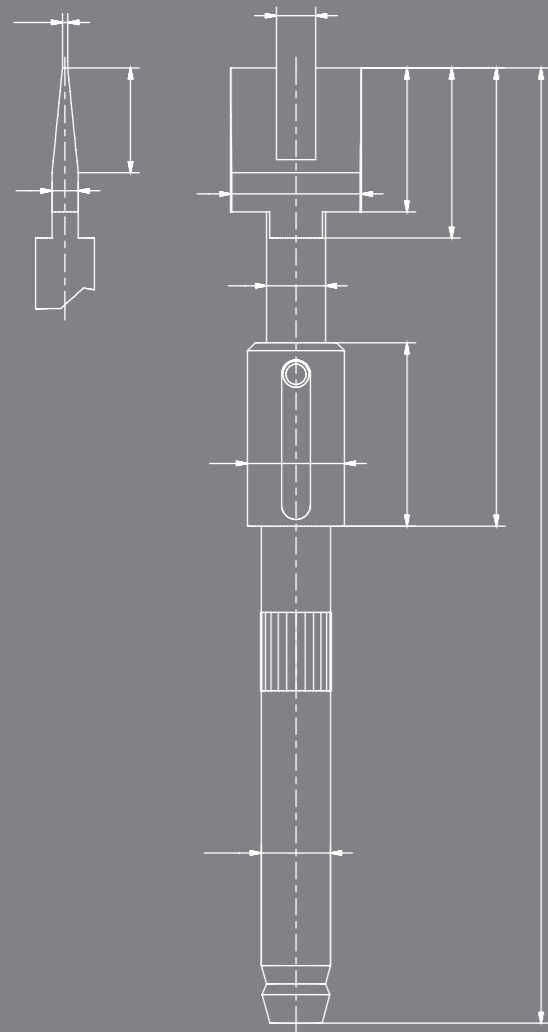

INTRODUCTION

Good functionality, a high level of efficiency, excellent precision and absolute reliability in our delivery performance:

these factors are why customers worldwide are putting their faith in PTR products. We combine quality and reliability with the claim to provide optimal solutions for customer-specific requirements. For us, these features have a long tradition. Since 1979, alongside a constantly expanding range of products, they have played a major role in our becoming a modern global player in the electromechanical components sector. Today, the name of PTR stands for excellence and innovation in the field of terminal and testing technology. Our merger with the Swiss firm of Phoenix Mecano in 1989 strengthened our worldwide presence. As a result, PTR terminal blocks, multi-connectors, test probes and DIN rail terminal blocks are now available in more than 50 countries.

In addition, we set standards by using German engineering, high-quality materials, flexible production processes and intelligent logistics.

Also, the areas of application for our test probes are extremely wide-ranging. In the sectors of telecommunications, medical technology, aeronautics and aerospace, the automotive industry and many others, PTR test probes are used as secure and reliable contact elements for testing PCBs (ICT+FT) and cable harnesses. One additional and steadily growing field of applications is the use of test probes as a charging contact for industrial applications or PCB connectors as a single contact or multi-pole contact block.

PTR responds to the constantly increasing demands of the market by presenting flexible and targeted solutions. The development and construction of test probes for customer-oriented applications lead to permanent on-going development of our range of products. In these cases, professional concepts are developed jointly and implemented precisely in cooperation with our customers.

As a result of its work in the terminal block sector, PTR has also acquired a great deal of competence and excellent know-how about plastic parts. All this experience has been used to develop a new range of products, and for some time interface blocks have added to and expanded this. They are used wherever rechargeable batteries in mobile devices such as scanners, card readers, communication devices and others need to be recharged.

One example is e-bikes, in which the battery connections are used in the operating unit and the display. In addition they are found in LED lights in the shopfitting sector and for "smart home" solutions. Also, they are often used to connect two PCBs, and for both purposes they can be supplied, ready for use, in blister belts and trays.

For us, on-going development of our products, in line with market requirements, is both a task and an obligation.

The result is new applications for different test technology applications. Without doubt, one highlight is the wide range of high-frequency test probes used in the growing market for communication and in-car entertainment technology. Our HPL test probes were developed to deal with the special demands which the PCB test requires. The high level of spring pre-tension and the resulting high initial pressure lead to a reduction in pseudo errors in the ICT sector.

A company which offers first-class products and services cannot leave anything to chance, so the use of modern quality management systems is very important. In order to implement and achieve the above-mentioned goals, it is especially important for us to continue to expand these concepts of quality and to anchor them in a quality management system. To this end, the group and company management have decided to introduce a QM system according to EN ISO 9001 so that we can continue to satisfy both the high levels of market requirements and those of our customers.

Success also means responsibility.

PTR sees the relationship to the environment and the preservation of our habitat for future generations as an obligation. We document this with certification according to EN ISO 14001. Of course, we also comply with EU directives such as ROHS2 (2011/65/EU) and REACH (1907/2006/EC) in their current versions.

All the information in this catalogue has been compiled to the best of our knowledge and belief and is correct at the time of going to print. Up-to-date information is always available on our PTR website at www.ptr-hartmann.com.

Content

| CONTENT | PAGE |
|----------------------------|------|
| PHOENIX MECANO AG | 10 |
| TECHNICAL COMPENDIUM | 14 |
| Design and Structure | 14 |
| Materials and Coatings | 16 |
| Receptacles and Assembly | 18 |
| Lateral Play | 20 |
| Quality and Operation Life | 20 |
| Highlights | 21 |
| TIP STYLES | 22 |
| ARTICLE DESIGNATION | 24 |
| PTR HARTMANN WEBSITE | 26 |

| SERIES | CENTER | EXTENSION HEIGHT mm / INCHES | WORKING TRAVEL mm / INCHES | MAX. TRAVEL mm / INCHES | PAGE | |
|----------|---|---------------------------------|-------------------------------|----------------------------|--------------|----|
| 1 | TEST PROBES FOR SMALL CENTER | | | | 30 | |
| | 1001 | 30 mil / 0.76 mm | 5.50 / .217 | 1.35 / .053 | 2.00 / .079 | 30 |
| | 1002 | 40 mil / 1.02 mm | 5.30 / .209 | 1.35 / .053 | 2.00 / .079 | 31 |
| | 1003 | 40 mil / 1.02 mm | 3.70 / .146 | 1.00 / .039 | 1.30 / .051 | 32 |
| | 1005 | 40 mil / 1.02 mm | 10.50 / .413 | 3.00 / .118 | 3.80 / .149 | 33 |
| | 1006 | 40 mil / 1.02 mm | 13.33 / .525 | 1.27 / .500 | 2.29 / .090 | 34 |
| | STANDARD TEST PROBES | | | | 36 | |
| 2 | STANDARD TEST PROBES CENTER ≤ 100 mil / 2.54 mm | | | | 36 | |
| | 1007 | 50 mil / 1.27 mm | 6.70 / .264 | 2.40 / .095 | 2.80 / .110 | 38 |
| | 1007.50 | 50 mil / 1.27 mm | 5.50 / .216 | 1.35 / .053 | 2.00 / .079 | 39 |
| | 1007.60 | 50 mil / 1.27 mm | 6.05 / .238 | 2.54 / .100 | 2.54 / .100 | 40 |
| | 1007.70 | 50 mil / 1.27 mm | 6.00 / .236 | 1.27 / .050 | 1.27 / .050 | 41 |
| | 1010 | 75 mil / 1.91 mm | 8.30 / .327 | 2.40 / .095 | 3.00 / .118 | 42 |
| | 1010.50 | 75 mil / 1.91 mm | 6.54 / .258 | 2.54 / .100 | 2.54 / 1.00 | 43 |
| | 1011 | 75 mil / 1.91 mm | 8.20 / .323 | 4.20 / .165 | 4.20 / .165 | 44 |
| | 1015 | 100 mil / 2.54 mm | 12.80 / .504 | 3.50 / .138 | 4.40 / .173 | 45 |
| | 1015.50 | 100 mil / 2.54 mm | 8.70 / .342 | 4.20 / .165 | 4.20 / .165 | 46 |
| | 1016 | 100 mil / 2.54 mm | 12.80 / .504 | 3.50 / .138 | 4.40 / .173 | 47 |
| | 1018 | 100 mil / 2.54 mm | 13.30 / .484 | 3.50 / .138 | 4.40 / .173 | 48 |
| | 1018.06 | 100 mil / 2.54 mm | 12.00 / .472 | 2.70 / .106 | 4.10 / .161 | 49 |
| 3 | STANDARD TEST PROBES CENTER > 100 mil / 2.54 mm | | | | 50 | |
| | 1030 | 125 mil / 3.18 mm | 16.30 / .642 | 5.00 / .197 | 6.30 / .248 | 52 |
| | 1054 | 138 mil / 3.50 mm | 17.00 / .669 | 5.10 / .201 | 6.40 / .252 | 53 |
| | 1040 | 160 mil / 4.00 mm | 19.60 / .665 | 4.40 / .173 | 5.50 / .217 | 54 |
| | 1050 | 160 mil / 4.00 mm | 10.70 / .421 | 4.40 / .173 | 5.50 / .217 | 55 |
| | 1060 | 160 mil / 4.00 mm | 10.70 / .421 | 4.40 / .173 | 5.50 / .217 | 56 |
| | 1051 • 1061 | 160 mil / 4.00 mm | 10.20 / .638 | 5.60 / .221 | 7.00 / .276 | 57 |
| | 1041 • 1041/W | 177 mil / 4.50 mm | 11.05 / .435 | 4.80 / .189 | 6.00 / .236 | 58 |
| | 1042 | 177 mil / 4.50 mm | 13.30 / .524 | 5.60 / .221 | 7.00 / .276 | 59 |
| | 1055 | 177 mil / 4.50 mm | 16.50 / .650 | 5.10 / .201 | 6.40 / .252 | 60 |
| | ICT TEST PROBES | | | | 62 | |
| 4 | E-SERIE | | | | 62 | |
| | 1004/E | 40 mil / 1.00 mm | 16.00 / .630 | 4.30 / .169 | 6.40/.252 | 64 |
| | 1008/E | 50 mil / 1.27 mm | 16.00 / .630 | 4.30 / .169 | 6.40/.252 | 65 |
| | 1008/E.50 | 50 mil / 1.27 mm | 21.30 / .829 | 8.00 / .315 | 10.00/.394 | 66 |
| | 1012/E | 75 mil / 1.91 mm | 16.00 / .630 | 4.30 / .169 | 6.40/.252 | 67 |
| | 1013/Z | 75 mil / 1.91 mm | 21.20 / .835 | 9.60 / .378 | 12.00/.472 | 68 |
| | 1025/E | 100 mil / 2.54 mm | 16.30 / .642 | 4.30 / .169 | 6.40/.252 | 69 |
| | 1034 | 100 mil / 2.54 mm | 19.50 / .768 | 8.00 / .315 | 10.00/.394 | 70 |
| | 1034/E | 100 mil / 2.54 mm | 19.90 / .783 | 8.00 / .315 | 10.00 / .394 | 71 |
| | 1036 | 100 mil / 2.54 mm | 19.50 / .768 | 9.60 / .378 | 12.00 / .472 | 72 |
| | 1036/E | 100 mil / 2.54 mm | 19.90 / .783 | 10.00 / .394 | 12.00 / .472 | 73 |

| SERIES | CENTER | EXTENSION HEIGHT mm / INCHES | WORKING TRAVEL mm / INCHES | MAX. TRAVEL mm / INCHES | PAGE | |
|------------------|---|---------------------------------|-------------------------------|----------------------------|-------------|-----|
| 2021 • 1021 | 100 mil / 2.54 mm | 10.50 / .413 | 4.00 / .157 | 5.30 / .209 | 74 | |
| 2024 • 1024 | 100 mil / 2.54 mm | 16.20 / .638 | 8.00 / .315 | 10.00 / .394 | 75 | |
| 2028 • 1028 | 100 mil / 2.54 mm | 10.50 / .413 | 4.00 / .157 | 5.30 / .209 | 76 | |
| 2029 | 100 mil / 2.54 mm | 16.20 / .638 | 6.40 / .252 | 8.00 / .315 | 77 | |
| Receptacles 1012 | | | | | 78 | |
| Receptacles 1025 | | | | | 79 | |
| 5 | HPL TEST PROBE WITH HIGH PRE-LOADED SPRING FORCE | | | | 80 | |
| | 1008/E | 50 mil / 1.27 mm | 16.00 / .630 | 4.30 / .169 | 6.40 / .252 | 82 |
| | 1012/E | 75 mil / 1.91 mm | 16.00 / .630 | 4.30 / .169 | 6.40 / .252 | 83 |
| | 1025/E | 100 mil / 2.54 mm | 16.30 / .642 | 4.30 / .169 | 6.40 / .252 | 84 |
| 6 | ROTATING TEST PROBES | | | | 86 | |
| | 1008/D | 50 mil / 1.27 mm | 16.00 / .630 | 4.30 / .169 | 6.40 / .252 | 88 |
| | 1012/D | 75 mil / 1.91 mm | 16.00 / .630 | 4.30 / .169 | 6.40 / .252 | 89 |
| | 1025/D | 100 mil / 2.54 mm | 16.00 / .630 | 4.30 / .169 | 6.40 / .252 | 90 |
| 7 | FLYING PROBES | | | | 92 | |
| | 5248/G | 100 mil / 2.54 mm | 19.60 / .665 | 6.40 / .252 | 8.00 / .315 | 94 |
| | 5257/G | 100 mil / 2.54 mm | 14.60 / .576 | 4.00 / .157 | 5.30 / .209 | 95 |
| 8 | TEST PROBES WITH THREAD | | | | 96 | |
| | 1007/G | 50 mil / 1.27 mm | 10.50 / .413 | 4.00 / .157 | 5.00 / .196 | 98 |
| | 1010/G | 75 mil / 1.91 mm | 8.30 / .327 | 2.40 / .095 | 3.00 / .118 | 99 |
| | 1012/G | 75 mil / 1.91 mm | 10.50 / .327 | 4.30 / .169 | 6.40 / .252 | 100 |
| | 1015/G | 100 mil / 2.54 mm | 12.80 / .504 | 3.50 / .138 | 4.40 / .173 | 101 |
| | 1015/G for Position Test | 100 mil / 2.54 mm | see Product Page | 3.50 / .138 | 4.40 / .173 | 102 |
| | 1021/G | 100 mil / 2.54 mm | 10.50 / .413 | 4.00 / .157 | 5.30 / .209 | 103 |
| | 1021/G for Position Test | 100 mil / 2.54 mm | see Product Page | 4.00 / .157 | 5.30 / .209 | 104 |
| NEW | 1021/GT for Position Test | 100 mil / 2.54 mm | see Product Page | 4.00 / .157 | 5.00 / .196 | 105 |
| | 1028/G | 100 mil / 2.54 mm | 10.50 / .413 | 4.00 / .157 | 5.30 / .209 | 106 |
| | 5310/G | 100 mil / 2.54 mm | 8.70 / .343 | 3.50 / .138 | 4.50 / .177 | 107 |
| | 1060/G | 160 mil / 4.00 mm | 10.70 / .421 | 4.40 / .173 | 5.50 / .216 | 108 |
| | 1060/G for Position Test | 160 mil / 4.00 mm | see Product Page | 4.40 / .173 | 5.50 / .216 | 109 |
| NEW | 1060/GT for Position Test | 160 mil / 4.00 mm | see Product Page | 4.00 / .157 | 5.00 / .196 | 110 |
| | 1061/G | 160 mil / 4.00 mm | 16.20 / .638 | 5.60 / .221 | 7.00 / .276 | 111 |
| | 5110/G | 160 mil / 4.00 mm | 7.30 / .287 | 2.80 / .110 | 3.50 / .138 | 112 |
| | 1042/G | 177 mil / 4.50 mm | 13.30 / .524 | 5.60 / .221 | 6.00 / .236 | 113 |
| | Receptacles 1021/G | | | | 114 | |
| | Receptacles 1060/G | | | | 115 | |
| 9 | NON-ROTATING TEST PROBES | | | | 116 | |
| | 2053 | 100 mil / 2.54 mm | 18.20 / .717 | 4.00 / .157 | 5.00 / .197 | 118 |
| | 1053 | 197 mil / 5.00 mm | 16.20 / .638 | 4.00 / .157 | 5.00 / .197 | 119 |
| | 1021/GV | 100 mil / 2.54 mm | 10.50 / .413 | 4.00 / .157 | 4.30 / .169 | 120 |
| | 1053/G | 160 mil / 4.00 mm | 13.20 / .520 | 4.00 / .157 | 5.00 / .197 | 121 |
| | SWITCHING TEST PROBES | | | | 122 | |
| 10 | SWITCHING TEST PROBES WITHOUT THREAD | | | | 122 | |
| | 3035 | 75 mil / 1.91 mm | 9.30 / .367 | 4.00 / .157 | 5.00 / .197 | 124 |
| | 3024 | 75 mil / 1.91 mm | 6.80 / .268 | 4.00 / .157 | 5.00 / .197 | 125 |
| | 3020/2 | 100 mil / 2.54 mm | 9.50 / .374 | 4.00 / .157 | 5.30 / .209 | 126 |
| | 3026/2W | 100 mil / 2.54 mm | 10.20 / .402 | 4.00 / .157 | 5.30 / .209 | 127 |
| | 3030 | 100 mil / 2.54 mm | 16.40 / .646 | 5.00 / .197 | 6.30 / .248 | 128 |
| | 3003 | 125 mil / 3.18 mm | 16.00 / .630 | 5.00 / .197 | 7.50 / .295 | 129 |
| | 3010/2 • 3010/10 | 160 mil / 4.00 mm | 10.20 / .402 | 4.00 / .157 | 5.00 / .197 | 130 |
| | 3010/2F | 160 mil / 4.00 mm | 10.20 / .402 | 4.00 / .157 | 5.00 / .197 | 131 |
| | 3010/2W | 160 mil / 4.00 mm | 10.20 / .402 | 4.00 / .157 | 5.00 / .197 | 132 |
| | 3010/2V | 160 mil / 4.00 mm | 10.20 / .402 | 4.00 / .157 | 5.00 / .197 | 133 |
| NEW | 3015.06 | 265 mil / 6.50 mm | 1.40 / .055 | 1.20 / .047 | 1.40 / .055 | 134 |

Content

| SERIES | CENTER | EXTENSION HEIGHT mm / INCHES | WORKING TRAVEL mm / INCHES | MAX. TRAVEL mm / INCHES | PAGE |
|---|-------------------|---------------------------------|-------------------------------|----------------------------|------------|
| 11 SWITCHING TEST PROBES WITH THREAD | | | | | 136 |
| 3020/2G | 100 mil / 2.54 mm | 9.50 / .374 | 4.00 / .157 | 5.30 / .209 | 138 |
| 3020/2GW5 | 100 mil / 2.54 mm | 9.50 / .374 | 4.00 / .157 | 5.30 / .209 | 139 |
| 3023/2GS | 100 mil / 2.54 mm | 10.40 / .410 | 4.00 / .157 | 5.00 / .197 | 140 |
| 3024/2G | 100 mil / 2.54 mm | 9.20 / .362 | 4.00 / .157 | 5.00 / .197 | 141 |
| 3030/GW3 | 100 mil / 2.54 mm | 16.40 / .645 | 5.00 / .197 | 6.30 / .248 | 142 |
| 3012/2GS | 138 mil / 3.50 mm | 10.20 / .402 | 4.00 / .157 | 4.20 / .165 | 143 |
| 3012/2GS • F51/FLS1 | 138 mil / 3.50 mm | 10.20 / .402 | 4.00 / .157 | 4.20 / .165 | 144 |
| 3010/2G • 3010/10G | 160 mil / 4.00 mm | 10.20 / .402 | 4.00 / .157 | 5.00 / .197 | 145 |
| 3010/2GW(5) | 160 mil / 4.00 mm | 10.20 / .402 | 4.00 / .157 | 5.00 / .197 | 146 |
| 3011/2GS | 160 mil / 4.00 mm | 10.20 / .402 | 4.00 / .157 | 5.00 / .197 | 147 |
| 3011/2FGS | 160 mil / 4.00 mm | 10.20 / .402 | 4.00 / .157 | 5.00 / .197 | 148 |
| 3014/2G | 160 mil / 4.00 mm | 9.20 / .362 | 4.00 / .157 | 5.00 / .197 | 149 |
| NEW 3214/2GW | 160 mil / 4.00 mm | 9.20 / .362 | 3.00 / .118 | 5.00 / .197 | 150 |
| 3015/G | 300 mil / 7.50 mm | 1.10 / .043 | 0.80 / .003 | 1.00 / .039 | 151 |
| 12 PUSH-BACK TEST PROBES | | | | | 152 |
| 3028.01 | 100 mil / 2.54 mm | 17.80 / .700 | 4.00 / .157 | 5.00 / .197 | 154 |
| 5203 | 100 mil / 2.54 mm | 40.50 / 1.608 | 5.00 / .197 | 5.50 / .216 | 155 |
| 5265 | 118 mil / 3.00 mm | 40.50 / 1.594 | 5.00 / .197 | 5.50 / .216 | 156 |
| 5087 | 160 mil / 4.00 mm | 23.50 / .925 | 9.50 / .374 | 10.00 / .394 | 157 |
| 5104 | 160 mil / 4.00 mm | 34.90 / 1.374 | 5.00 / .197 | 7.00 / .276 | 158 |
| 13 HIGH-CURRENT TEST PROBES | | | | | 160 |
| 1021 • 1021/G | 100 mil / 2.54 mm | 10.50 / .413 | 4.00 / .157 | 5.30 / .209 | 162 |
| NEW 5310/G | 100 mil / 2.54 mm | 8.70 / .343 | 3.50 / .138 | 4.50 / .177 | 163 |
| NEW 5110/S • 5110/G | 160 mil / 4.00 mm | 7.40 / .291 | 2.80 / .110 | 3.50 / .138 | 164 |
| 1060 • 1060/G | 160 mil / 4.00 mm | 10.70 / .421 | 4.40 / .173 | 5.50 / .216 | 165 |
| 1075 • 1075/G | 197 mil / 5.00 mm | 10.80 / .425 | 4.40 / .173 | 5.50 / .216 | 166 |
| NEW 1080/G | 300 mil / 7.60 mm | 10.80 / .425 | 4.40 / .173 | 5.50 / .216 | 167 |
| 14 PNEUMATIC TEST PROBES | | | | | 168 |
| 4006 | 118 mil / 3.00 mm | 5.50 / .217 | 6.00 / .236 | 10.00 / .394 | 170 |
| 4005 | 138 mil / 3.50 mm | 5.50 / .217 | 6.00 / .236 | 10.00 / .394 | 171 |
| 4004 | 160 mil / 4.00 mm | 5.50 / .217 | 6.00 / .236 | 10.00 / .394 | 172 |
| 4034 | 160 mil / 4.00 mm | 10.50 / .413 | 4.00 / .157 | 5.30 / .209 | 173 |
| 4004/G | 160 mil / 4.00 mm | 8.50 / .338 | 6.00 / .236 | 10.00 / .394 | 174 |
| Pneumatic Accessories | | | | | 175 |
| 15 BATTERY TEST PROBES | | | | | 176 |
| 1064 | 100 mil / 2.54 mm | 8.11 / .083 | 1.27 / .050 | 1.27 / .050 | 178 |
| 5303 | 100 mil / 2.54 mm | --- | 0.70 / .027 | 1.40 / .055 | 179 |
| 5305 | 100 mil / 2.54 mm | --- | --- | 1.00 / .039 | 180 |
| 5099 | 118 mil / 3.00 mm | 5.10 / .200 | 1.00 / .039 | 1.20 / .047 | 181 |
| 5099.04 | 118 mil / 3.00 mm | 5.70 / .224 | 3.30 / .130 | 4.00 / .157 | 182 |
| NEW 5099.43 | 138 mil / 3.50 mm | 5.30 / .118 | 3.30 / .130 | 4.00 / .157 | 183 |
| 5110/S | 160 mil / 4.00 mm | 7.40 / .291 | 2.80 / .110 | 3.50 / .138 | 184 |
| 5082 | 256 mil / 6.50 mm | 7.00 / .276 | 3.20 / .126 | 4.00 / .157 | 185 |
| 5082.01 | 256 mil / 6.50 mm | 7.00 / .276 | 4.00 / .157 | 5.00 / .197 | 186 |
| 5082/L | 256 mil / 6.50 mm | 12.00 / .472 | 8.00 / .315 | 10.00 / .394 | 187 |
| 16 INTERFACE PIN BLOCKS | | | | | 188 |
| 5322 - FKB - vertical | 100 mil / 2.54 mm | --- | 0.70 / .027 | 1.40 / .055 | 190 |
| 5322 - PKB - vertical | 100 mil / 2.54 mm | --- | 0.70 / .027 | 1.40 / .055 | 191 |
| 17 COAXIAL TEST PROBES | | | | | 192 |
| 5207 | 256 mil / 6.50 mm | 7.80 / .307 | 3.00 / .118 | 3.50 / .138 | 194 |
| 5207/G | 256 mil / 6.50 mm | 7.80 / .307 | 3.00 / .118 | 3.50 / .138 | 195 |

| SERIES | CENTER | EXTENSION HEIGHT mm / INCHES | WORKING TRAVEL mm / INCHES | MAX. TRAVEL mm / INCHES | PAGE |
|--------------------------------------|-------------------|---------------------------------|-------------------------------|----------------------------|------------|
| 18 HIGH FREQUENCY TEST PROBES | | | | | 196 |
| 7840 • 7840/G - Z51 | --- | 12.90 / .508 | 1.00 / .039 | 1.50 / .059 | 198 |
| PCB Contact (GSG) | | | | | |
| 7860 • 7860/G - Z1 | --- | 16.90 / .665 | 2.00 / .079 | 3.70 / .146 | 199 |
| MM8130 • MM8430 • MS156 | | | | | |
| 7860 • 7860/G - Z2 | --- | 11.90 / .468 | 2.00 / .079 | 3.70 / .146 | 200 |
| MM8130 • MM8430 • MS156 | | | | | |
| 7860 • 7860/G - Z3 | --- | 11.90 / .468 | 2.00 / .079 | 3.70 / .146 | 201 |
| U,FL-m | | | | | |
| 7860 • 7860/G - Z4 | --- | 14.10 / .555 | 2.00 / .079 | 3.70 / .146 | 202 |
| R-SMA-m | | | | | |
| 7860 • 7860/G - Z5 | --- | 11.90 / .468 | 2.00 / .079 | 3.70 / .146 | 203 |
| MCX-f | | | | | |
| 7860 • 7860/G - Z6 | --- | 14.10 / .555 | 2.00 / .079 | 3.70 / .146 | 204 |
| SMA-f | | | | | |
| 7860 • 7860/G - Z7 | --- | 13.25 / .522 | 2.00 / .079 | 3.70 / .146 | 205 |
| SMB-m | | | | | |
| 7860 • 7860/G - Z8 | --- | 11.90 / .468 | 2.00 / .079 | 3.70 / .146 | 206 |
| SMB-f | | | | | |
| 7860 • 7860/G - Z9 | --- | 11.90 / .468 | 2.00 / .079 | 3.70 / .146 | 207 |
| SMC-m | | | | | |
| 7860 • 7860/G - Z25 | --- | 12.10 / .476 | 2.00 / .079 | 3.70 / .146 | 208 |
| FAKRA Plug | | | | | |
| NEW 7860 • 7860/G - Z20 | --- | 12.30 / .484 | 2.00 / .079 | 3.70 / .146 | 209 |
| FAKRA Socket | | | | | |
| 19 FIXTURE CUSTOMIZING | | | | | 210 |
| 1016 | 100 mil / 2.54 mm | see Product Page | --- | 3.10 / .122 | 212 |
| 1025.21 | --- | --- | 4.40 / .173 | 4.80 / .189 | 213 |
| IF Contacts | --- | --- | --- | --- | 214 |
| SK 790 - Marker Probe | --- | --- | 1.50 / .059 | 2.00 / .079 | 215 |
| 20 TOOLS | | | | | 216 |

| CONTENT | PAGE |
|------------------------|------------|
| REPRESENTATIONS | 224 |
| International | 224 |
| Germany | 225 |
| SERIES INDEX | 226 |
| IMPRINT | 230 |

PHOENIX MECANO AG

The Group Phoenix Mecano is a global player in the enclosures and industrial components segments, has a streamlined operating structure and is a leader in many markets. Geared towards the professional and cost-effective manufacture of niche products, it helps to ensure the smooth operation of processes and connections in the machine industry and industrial electronics. Its products are used in the mechanical engineering, measurement and control technology, alternative energy, medical technology, aerospace technology and home and hospital care sectors, amongst others.



Enclosures

Phoenix Mecano enclosures protect all types of electronic and electrical equipment, offering exactly the kind of protection the customer requires.

Areas of application include plant engineering, railway, automotive and medical technology and offshore oil platforms. In addition to enclosures, Phoenix Mecano also supplies input units such as membrane keyboards and keypads, short-stroke keys, capacitive buttons and touchscreens.



Mechanical Components

This division's wide range of linear actuators, electric cylinders and lifting columns are deployed in industry, workstation installation and the home and hospital care sector.

Its profile assembly systems can be used to assemble peripheral production systems right through to entire production lines.



ELCOM/EMS

The ELCOM/EMS division's products are used wherever electrical energy flows, whether it be high, medium or low voltage, alternating or direct current.

They can be found in all industrial sectors, from medical technology, astrophysics and aerospace, to power distribution networks, switchgear and renewable energy.

STRONG TOGETHER – PRODUCTS OF OUR GROUP OF COMPANIES





Phoenix Mecano-Group
 Gross Sales
 approx. **627.6** million EUR*
 Employees
 approx. **6.759** Employees*

PHOENIX MECANO GROUP LOCATIONS AROUND THE WORLD

North | South America

- USA:**
 Orlando, Florida
 Springfield, Ohio
 Shannon, Mississippi
 Frederick, Maryland
 Ontario, Kalifornien
Brasilien:
 Barueri
- Europe | Africa**
- Great Britain:** Aylesbury
- Spain:** Zaragoza
- France:** Fontenay-sous-Bois
- Benelux:**
 Deinze, Belgien
 Al Ter Apel, Netherlands
 Doetinchem, Netherlands
 Enschede, Netherlands
- Scandinavia:**
 Odense, Denmark
 Ingelstad, Sweden

Germany:

- Alsdorf, Biersdorf, Bünde,
 Burscheid, Grävenwiesbach,
 Kirchlegern, Langenhagen,
 Minden, Muggensturm, Porta
 Westfalica, Salem-Neufrach,
 Stuttgart, Villingen-
 Schwenningen, Werne,
 Wendel, Wutha-Farnroda
- Switzerland:** Stein am Rhein
- Czechia:** Běhařovice
- Tunesia:**
 Ben Arous, Borj-Cedria,
 Bouhejba-Zaghouan
- Marocco:** Tétouan
- Italy:** Inzago
- Austria:** Wien
- Hungary:** Kecskemét
- Romania:** Sibiu

Asien

- Turkey:** Ankara
- Russia:** Moskau
- United Arab Emirates:** Sharjah
- India:** Pune
- Indonesia:** Jakarta
- Singapore:** Singapore
- People's Republic of China:**
 Dongguan, Kwun Tong (Hong Kong),
 Jiaxing, Shenzhen, Schanghai,
 Taicang
- Taiwan:** Taipei
- Korea (South Korea):**
 Haeundae-gu, Busan
- Vietnam:** Ho Chi Minh Stadt
- Australia**
 Australia: Victoria

*The numbers relate to 2017.

You can find current figures on our
 Website: www.phoenix-mecano.com

Design and Structure

Application Areas

Test Probes are used in the manufacture of electronic products to test PCBs. When fitted in test adapters, they carry out in-circuit tests and function tests. The aim is to optimize production by raising quality and reducing costs, factors which are caused by faulty components.

The test probe also plays an important part in the automotive industry, where it is used in test modules for testing connectors in cable harnesses. This means that the test probe is an important link in meeting the high quality standards found in automobile manufacture.

Interface Pin Blocks create an electrical contact between two components. As battery probes, they are used, for example, wherever it is necessary to charge the rechargeable batteries in mobile devices such as scanners, card readers, communication devices, etc.

The special design of the test probes which are used here adapts perfectly to an extremely wide range of contact situations. The probes guarantee a clean connection on almost all surfaces, including with ambient conditions in which oscillations and vibrations could affect the contacting. Irrespective of the specified installation height of the interface pin blocks, the test probes compensate for unevenness and differing heights on the contact surfaces. These features ensure a perfect and safe electrical contact. When positioned in the right place and used correctly, the interface pins can achieve up to 1 million contact cycles.

One typical application for interface pins is their use in interface pin blocks. They can be used for the secure connection of two PCBs which, by means of flexible contacting technology, can be connected and disconnected as often as required. This especially flexible connection of the interface pin blocks requires only a contact surface which is larger than the diameter of the probe head, so it offers considerable advantages when compared with connectors, which always require a precise connection. Additional arguments in favour of the use of interface pin blocks include the absence of insertion and withdrawal forces, and minimal wear and tear.

Design

In its basic construction, a test probe consists of three parts (see fig. 1). The electrical contact to the test piece is created by the plunger, which, together with a spring, is inside the barrel. The individual parts are connected moveably with each other by means of mechanical re-shaping of the barrel.

Barrel

The barrel protects the moving parts. At the same time, small tolerances ensure precise plunger guidance. The barrels are manufactured using deep drawing or machining processes. In some cases, ventilation drill holes are needed to ensure optimal coating.

Plunger

The plunger must conform to very high standards. It is a moving part which must be low-wear but at the same time highly conductive. Close tolerances must be included in the above criteria when plungers are used for small centers. The plungers are manufactured with maximum precision on long-turning lathes and then refined. In most cases, the plunger is coated with gold.

Plungers are manufactured of hardened fine-grained steel for use in heavy-duty operating time situations. The emphasis is on tips with extra penetration, for example pointed tips. Aged copper-beryllium (CuBe) is used for plungers, especially when high demands are made of electrical conductivity for longterm constancy. With regard to environmental aspects, these are taken care of by the 100% wet-processing of the beryllium and by the coating on the plungers.

Test probes with CuBe plungers are suitable for measurement tasks in the case of potential difference and for high-voltage applications. The brass plunger design with equally good conductivity is suitable for low-wear applications, e.g. charging contacts with very short travel and non-aggressive tip styles.

Alternatively, the plungers are fitted with different improvement coatings which, in addition to the electrical conducting and contact characteristics, are intended to satisfy specific requirements in respect of abrasion resistance and corrosion protection.

Spring


For the most part, springs are manufactured of spring steel wire of the maximum strength category with a special surface finish. The working temperature range for these springs between -30°C and $+120^{\circ}\text{C}$ also determines the operating temperature range for the complete spring contact probes. High-strength stainless steel wire is used with higher temperatures up to $+250^{\circ}\text{C}$ and increased demands on corrosion protection.

However, with this wire, it is not possible to achieve such high strength or spring force values as with spring steel wire.

Normally, gold is used as a surface plating because it reduces wear and improves the contact characteristics. The coating is applied in such a way that the structural characteristics of the high-strength spring material are affected as little as possible. In special cases, the springs are silver-coated (improved conductivity). In most cases, stainless steel springs are not given an additional coating, and they are used when temperatures are very high or for maximum heating.

The rated spring force of the spring contact probes refers to the working travel, which, as a rule, is 4/5ths of the maximum permitted plunger stroke travel.

Fig. 1:
Test Probe Design

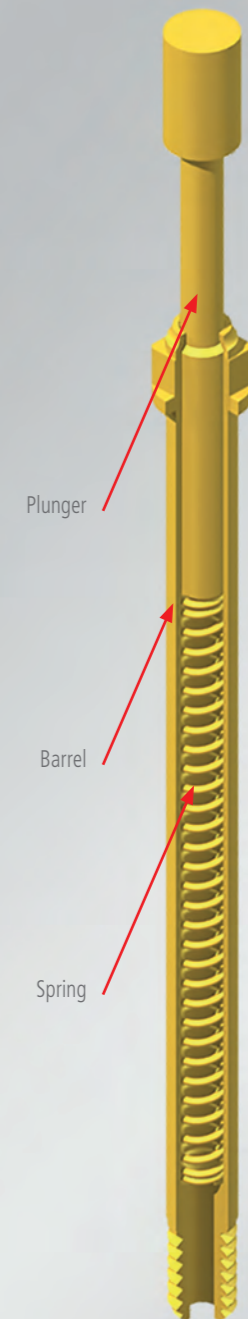

Materials and Coatings



MATERIALS

Steel

PTR uses steel as the standard material for the plungers. The stability of this material is good in comparison with others, and is extremely suitable for aggressive probe tips such as the "pointed tip" or the "chisel". The electrical properties are improved by the preferred gold coating.

Copper Beryllium

Copper beryllium is superior to steel in respect of the long-term stability of the electrical properties. Adding beryllium allows the materials to be easily processed, without completely losing the excellent properties of the copper.

Brass

Brass is a relatively soft material which is good for manufacturing purposes. Because of the high copper content, the electrical properties are also good, and for this reason, the material is mainly used for receptacles and barrels. However, brass is also a very popular plunger material for battery charging contacts, which normally do not have to withstand a very high number of load cycles.

Bronze

Bronze is used as a base material for receptacles and barrels; it offers good electrical properties and can be both turned and deep drawn.

Nickel Silver

Nickel silver is a very interesting material for receptacles because it is especially corrosion-proof and can be manufactured using the deep drawing process. Its copper content also makes it an acceptable conductor.

Spring Steel

High-strength spring steel is what is normally used to manufacture springs. It provides excellent properties which permit the manufacture of test probes with long operating times and balanced forces. The temperature range is from -30°C to 120°C . The springs are coated with gold or silver.

Stainless Steel

Stainless steel is used for springs in situations which require greater temperature stability than those which require standard springs. Temperatures from -40°C to 250°C (max. period of one hour) are possible. Good corrosion resistance is an additional advantage of stainless steel.

Plastic

High-quality plastics which can resist high temperatures are used to isolate the probe tip of switching test probes or as an isolator in the test probe itself. This material is also used as a carrier material for interface pin blocks. This is where PTR can benefit from its extensive experience of the terminal block sector.

COATINGS

In all cases an intermediate nickel coating is used for protection in order to prevent diffusion of the material.

Hard Gold

Hard gold has a passive surface, so it is an ideal electrical contact partner with very good chemical resistance. The special gold alloy, with a micro hardness of up to 400 HV, is much harder than pure gold, but there are limits with regard to wear behaviour. The abrasion behaviour can be influenced positively if the conditions of use are optimised, for example by the avoidance of radial movements.

Rhodium

Rhodium is one of the platinum metals. A very high level of wear resistance is achieved because of the very high degree of hardness of up to 1000 HV. However, because of the stored oxygen, a higher level of layer brittleness must be expected. This problem can be reduced by means of a special layer build-up and reduced layer thicknesses. However, rhodium plating is unsuitable when heavy impact loads are involved. If the brittle and very thin rhodium layer is damaged, this may have a negative effect on the initially good electrical contact characteristics.

Nickel (chemical)

Nickel is distinguished by even layer deposition with excellent contour accuracy, which is especially advantageous for the function of pointed tips and sharp-edged tip styles. This nickel plating has a micro hardness of approx. 600 HV, which can, as an option, be increased to 1000 HV and more by means of subsequent heat treatment. This is accompanied by very good wear resistance. Maximum corrosion resistance is achieved by the intercalation of phosphorus. However, the resulting inactive surface does not result in such good contacts as those of gold or rhodium.

Silver

Silver provides the best electrical conductivity among metals, which is why it is used, for example, for high-current applications. In this case, the spring of the test probe used is silver-coated in order to increase conductivity. In addition, some of the probe tips in the high-current range are fitted with caps made of a silver alloy, because this prevents restrictions to the conductivity caused by contact pitting.

Receptacles and Assembly

RECEPTACLES

Receptacles are fitted firmly in the relevant probe location boards in order to permit the replacement of the spring contacts without wiring work when the limit to the operating life (see page 20) is reached.

Base materials for the receptacles are

- » Bronze
- » Nickel Silver or
- » Brass

Gold plating ensures good electrical properties, with nickel underneath for corrosion protection.

Types of Receptacles

PTR offers receptacles with a range of connection types. In addition to standard products such as crimp, solder and wire wrap connections (see fig. 1), solutions for special fields of application are available.

Threaded Receptacles for screwable Test Probes (see fig. 2)

This type of receptacle is used in so-called test benches which test the functionality of cable harnesses. The screwing of the test probes into the receptacle prevents unintended twisting of the test probes out of the receptacle caused by the abrupt stroke movements of the test modules.

Threaded Receptacles with a drill hole in the solder cup (see fig. 2)

This receptacle is sealed vacuum-tight when the wire is soldered on.

Easy Replacement Receptacles for Switching Test Probes (see fig. 2)

In this case, wiring takes place twice on the receptacle and no longer on the switching test probe itself. During maintenance work, the switching test probe can be replaced without the need for any other wiring work.

Receptacles with a non-rotating feature (see fig. 2)

This type of receptacle makes it possible to position the test probes precisely in respect of the test piece. This solution is used especially with the so-called spade-shaped head style.

Insulation Receptacles (see fig. 2)

This type of receptacle is deployed when test probes are used in a conductive carrier material. In this case, the insulation receptacle holds the actual receptacle of the test probe.

Pre-wired Receptacles (see fig. 1)

These receptacles are already fitted with a component lead which the customer can adapt to the required individual length.

Receptacles for different extension heights (see fig. 3)

As standard, the receptacle is pressed into the carrier material as far as the stop. The receptacle type fitted with a press ring permits different extension heights – it is inserted to a specified distance by means of a special insertion tool. So-called distance rings are an alternative to this and are placed over the receptacle before it is pressed into the carrier material. Distance rings are available for different series and extension heights.

ASSEMBLY HOLES

In order to achieve an optimal fit of the receptacles in the probe location board, the assembly holes must be drilled very carefully. The drill diameters listed in the data sheets for the individual series are the values based on our experience.

These guideline values are dependent on the following conditions:

- » Use of hard metal drills
- » RPM of the drill tool 26.000 ... 35.000 rpm
- » Advance 0.6 ... 0.8 mm/min
- » Material as described in the data sheet
- » Probe location board thickness 10.0 mm
- » Drilling under vacuum swarf removal device

Deviations from these influencing variables may result in other drill diameters.

Trial drillings are recommended in every case.

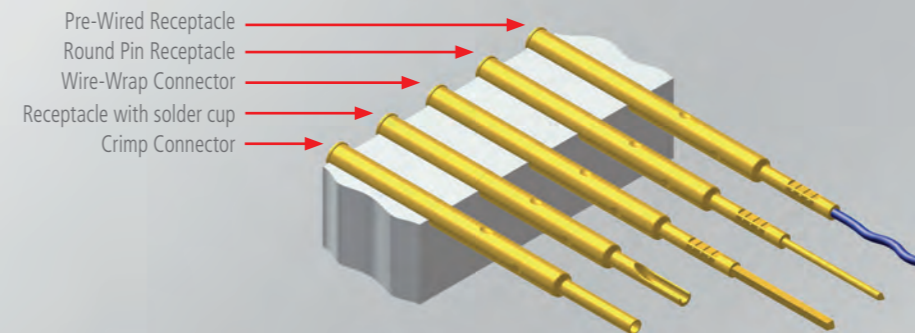


Fig. 1: Standard Types of Receptacles

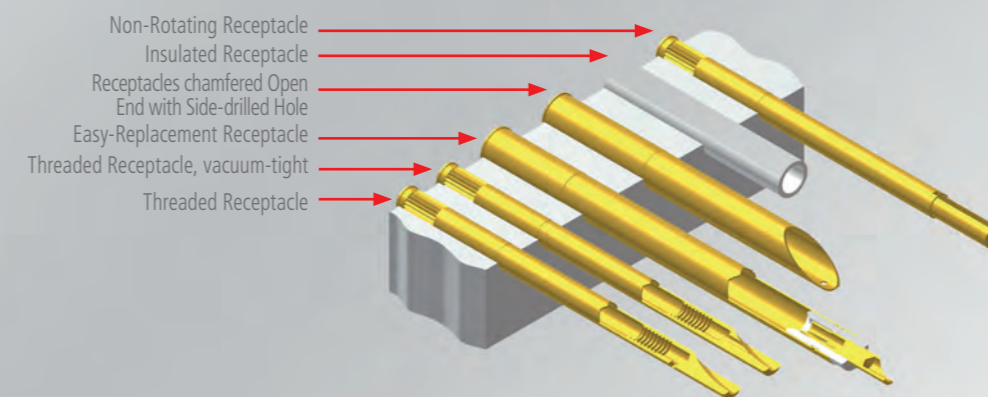


Fig. 2: Individual Types of Receptacles

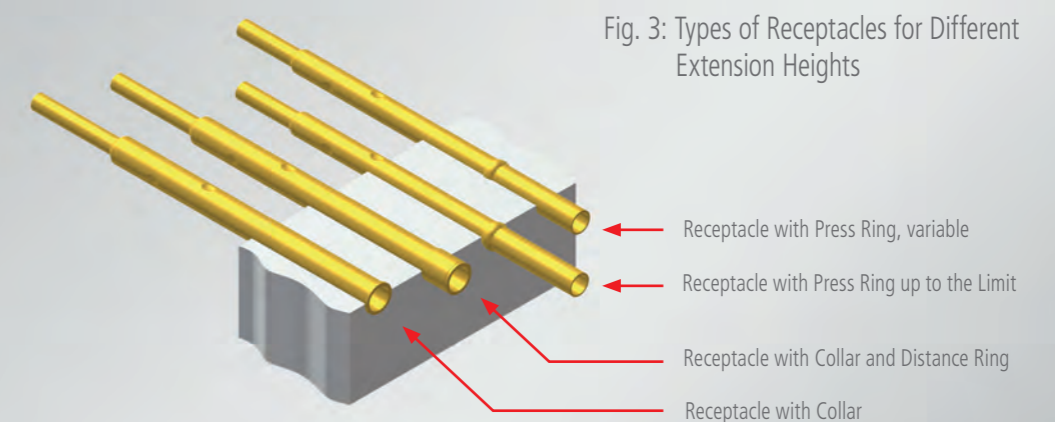


Fig. 3: Types of Receptacles for Different Extension Heights

LATERAL PLAY

Test Point Accuracy

The test point accuracy which can be achieved is determined by the tolerances in the adapter (play, displacement of the receptacle drill holes), the deviations of the test points and the lateral

play of a fitted spring contact probe (see fig. 1). This occurs as a result of the play between the plunger and receptacle required for the plunger movement and also of manufacturing tolerances (see fig. 2). The amount of lateral play at the plunger tip is also dependent on the length of the plunger in relation to the effective plunger guide length.

Shear forces which deflect the spring contact probe during use also affect the amount of lateral play.

Optimal pinpointing is achieved by a combination of spring contact probes with the shortest possible travel, double plunger guides and minimal adapter tolerance, or even the use of plate guides. Depending on the test probe series which is being used, the test point accuracy – which is dependent on the amount of lateral play – can be reduced to less than 0.8 mm and down to 0.1 mm.

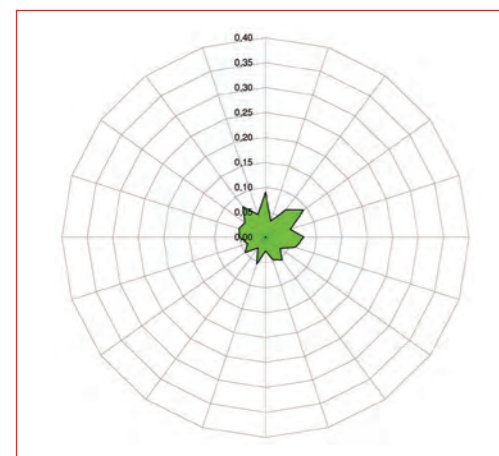


Fig. 1:
Test Point Accuracy (mm)



Fig. 2:
Lateral Play

QUALITY AND OPERATING LIFE

When in use, Test Probes are subjected to high demands in respect of function and operating life. From development to dispatch, the manufacture of PTR test probes takes place in accordance with optimised procedures. A quality assurance system according to EN 29001/ISO 9001 guarantees process security.

Tests are carried out by means of load change tests in order to optimise materials and the constructional design of test probes. Functional capability and operating life are subjected to continuous monitoring in our reliability testing facilities (see fig. 3).

As a rule, the maximum operating life of a test probe depends on the following factors:

- » As low a spring force as possible in relation to the spring diameter and stroke travel
- » Correct axial load, avoidance of shear forces
- » Maintenance of the recommended working travel
- » Precise and gentle insertion of the test probe into the receptacle
- » Avoidance of harmful external influences e.g. soiling, high moisture content of aggressive media, high temperature load
- » Contacting only in current-free or zero-potential state
- » As low a current load as possible

Of course, the level of actual durability also depends on the requirements of each user, e.g. limit values for continuity resistances, degree of soiling, or operating characteristics.


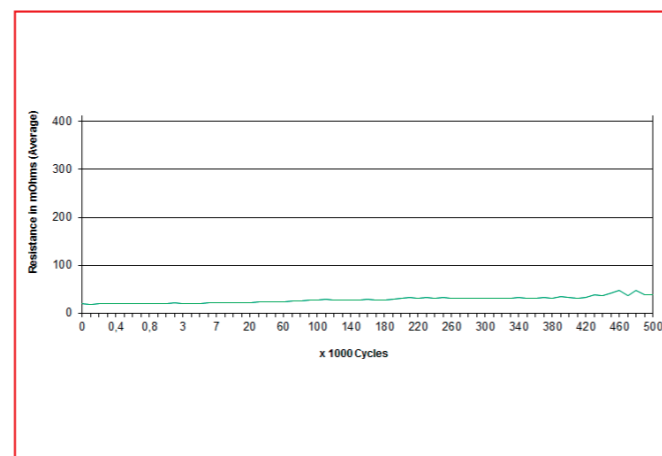


Fig. 3:
Life Circle for Series 1025/E (Example)

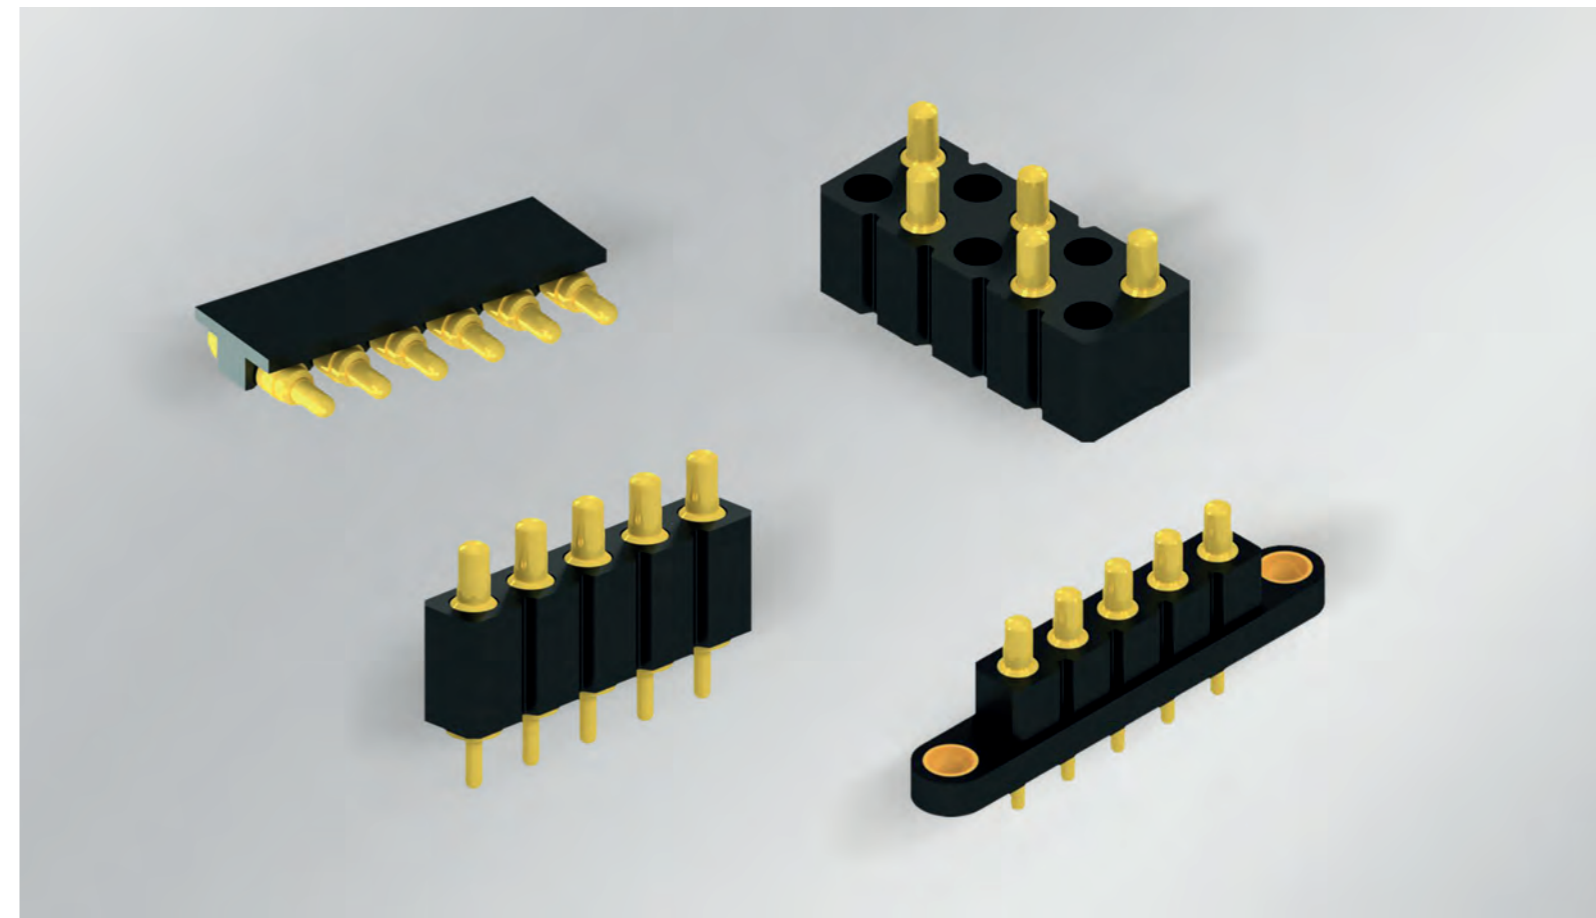

TEST PROBE TECHNOLOGY ENSURES FLEXIBLE, ELECTRICAL CONNECTIONS

Test probes can be much more than just test equipment, and their areas of application are growing all the time. They can be used as connection elements in aerospace technology, as charging contacts in modern trains, or as PCB connectors in PCB sandwiches – in fact, PTR's test probes can be found everywhere. For example, they open up many opportunities, from use in waterproof handheld devices to plug-in connectors in cables which cannot be pulled out.

The plug-in process which is carried out by our employees or by the end-customer is very easy and even allows blind-mating (= connection without direct sight of the test probes). This saves a lot of time during final assembly. In addition, the constant pressure of the spring can compensate for installation tolerances. At the same time, the resulting stroke ensures secure protection against vibration. Features which are already highly appreciated in test technology are, of course, retained. In this

way, the battery charging contacts display low electrical resistance and frequently have an operating life of up to of many thousands of load changes. For the most part, temperature-resistant plastics are used, so automatic mounting and soldering processes with SMT and THR products are also possible.

As a reliable supplier of terminal blocks, PTR uses its expertise to manufacture interface pin blocks. For this reason, carrier blocks are available for both vertical and horizontal use, and also with a flange as an especially sturdy version.

The range of possible test probes is unlimited. Depending on the contacting situation, PTR offers its customers the ideal solution to their problem. Individual mounting of carrier blocks and new developments can also be carried out.

Tip Styles

FORM A**90° Concave**

For connector pins, wire-wrap pins and straight / curved terminals. To be used under clean conditions because contamination can cause failures.

FORM A6**90° Concave, self-cleaning**

For connector pins, wire-wrap pins and straight / curved terminals. The head has special grooves that protect the contact area from contamination.

FORM B**30° pointed tip**

For strip conductors, throughplating, soldering points and test pads.

FORM BST**Steel Needle**

A sharp steel needle with a long implement life for reliable penetration of flux and dirt on uncleaned printed boards or component groups and for SMD contacts.

FORM BST3**Tri-Needle**

Three-needle form of very aggressive character for reliable penetration of flux and dirt on uncleaned printed circuit boards.

FORM C**Serrated**

A universal head for straight or curved component leads, wire-wrap posts and connector pins.

FORM CS**Serrated with overlapping plastic insulation**

Presence test of component legs. The overlapping plastic insulation avoids electrical contact when connector pins are missing.

FORM D**Round Head**

Used to test circuits or gold pads. Do not leave marks on the test area. Also used for testing sockets in connectors.

FORM E**90° Convex**

Plated-through holes, pads and lands or sockets in connectors.

FORM EB**Press Fitted Steel Needle**

Very aggressive and robust steel needle. Especially designed for testing contaminated areas.

FORM F**Flat head**

Especially for gold pads and convex areas, cleaned contact points. Avoids marks on the contact area.

Tip Styles

FORM G**Four-point crown**

For component leads, soldering points and test pads, when there is no strong contamination.

FORM H**Pyramid**

Plated-through holes and pads. The sharp edges cut through oxides and contaminants.

FORM K**Star**

See tip style "H", but with higher contact penetration. Used also for rotating test probes. It cuts through oxides and contaminants.

FORM M**Tulip with overlapping middle edge**

The combination of crown and central tip ensures contact reliability at almost all test points. Overlapping middle edge is fixing the head.

FORM M1**Tulip**

The combination of crown and central tip ensures contact reliability at almost all test points.

FORM N**Three point crown - self-cleaning**

Designed to test contaminated printed circuit boards. The special cut of the tip allows contaminants to fall out easily.

FORM Q**Four point crown - self-cleaning**

Designed to test contaminated printed circuit boards. The special cut of the tip allows contaminants to fall out easily.

FORM Q8**Eight point crown - self-cleaning**

Designed to test strong contaminated component legs. High centering efficiency.

FORM V**Chisel**

Tip with extra penetration of open and closed throughplating, and for level contact surfaces. Penetrates flux and dirt.

FORM D1xxx**Round head**

Designed for position test of sockets in connectors.


FORM Y**Spade**

application with test probes in connector systems.

Article Designations

Article Designations

ARTICLE DESIGNATION – TEST PROBES

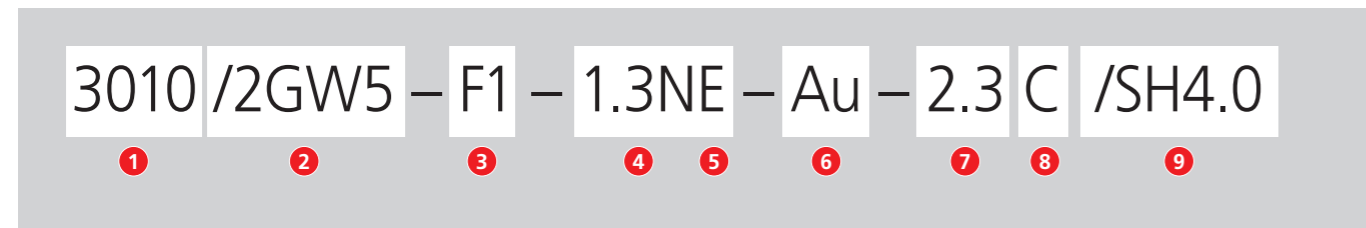

1 Test Probe – Series Designation

2 Special Design of the Barrel

- /D Rotating Test Probe
- /F Type Opener
- /G Thread Design
- /R Knurl
- /S Plug-in Connector
- /V Non-Rotating Design
- /W Interchangeable without Soldering
- /Number Collar Height (mm)
- /Number (second Part) Adjustment Area of the Extension Height

3 Tip Style

Different Letters (see page 22)

4 Spring Force (N)

Value In General $\frac{4}{5}$ of max. Travel

5 Spring Material

E Stainless Steel

6 Tip Plating

- Ag Silver
- Au Gold
- CB Copper-Beryllium
- HTK Plastic
- Ni Nickel
- Rh Rhodium

7 Tip Diameter (mm)

Selected Tip Style


8 Tip Material

- C Copper-Beryllium (CuBe)
- M Brass (CuZn)

9 Additional Information

- L For Connector von L 4000
- /MHx.x Full Travel (mm)
- /SHx.x Switch (mm)
- /X x Y Connector Pin Diameter x Connector Pin Length (mm)

ARTICLE DESIGNATION – RECEPTACLES

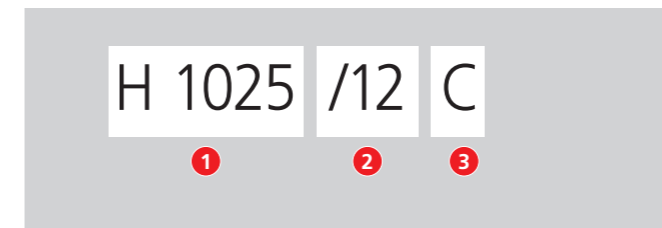

1 Receptacles – Series Designation


2 Special Design of Receptacle

- /G Thread
- /R Knurl
- /S Chamfered Design
- /SEV Switching Element
- /V Non-Rotating Design
- /...V Vacuum-Tight Design
- /W Interchangeable without Soldering
- /Number Collar Height (mm)

3 Connection Type

- C Crimp Connection
- L Soldering Connection
- SEV Vacuum-Tight Switching Element
- ST Additionally Roller-Burnishing
- V xx Pre-Wired Receptacles with Length
- W Wire Wrap Connection
- WR Round Posts
- Number Receptacles Length (mm)

ARTICLE DESIGNATION – DISTANCE RINGS

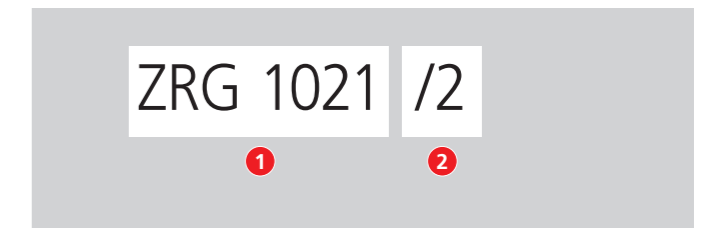

1 Distance Rings – Series Designation

2 Length

/Number Distance Rings Length (mm)



www.ptr.eu

1 Products

- Product search with individual search criteria
- Product data sheets with technical drawings
- PDF generation
- Test Probes - product configurator
- Sample order
- Quotation order
- Terminal Blocks / Multi Connector Systems

2 Know How

- Background knowledge and more detailed information on our products

3 Downloads

- Catalogues
- Certificates
- Statements of conformity
- Brochures

4 Cross-Reference

- Recoding of competitor article designations to PTR designations

5 Login Area

- Premium service for registered customers
- Download 3D-files

6 Contact

- Your contacts worldwide

TEST PROBES FOR SMALL CENTERS

Test Probes with Centers of 30 mil (0.76 mm) and greater have been designed for applications with very small centers.

In some cases, the diameters are extremely small, and the receptacles for these Test Probes are supplied with pre-assembled wires (AWG 30/AWG 32). The length and colour of the connection wires can be selected as required.

When these Test Probes are used in the test adapters, a guide plate is normally inserted in order to prevent misalignment and damage to the test probe plunger and to optimise the point of contact accuracy.

| SERIES | CENTER | PAGE |
|--------|------------------|------|
| 1001 | 30 mil / 0.76 mm | 30 |
| 1002 | 40 mil / 1.02 mm | 31 |
| 1003 | 40 mil / 1.02 mm | 32 |
| 1005 | 40 mil / 1.02 mm | 33 |
| 1006 | 40 mil / 1.02 mm | 34 |



Series 1001

Test Probe for small Centers 30 mil / 0.76 mm

Test Probe for small Centers 40 mil / 1.02 mm

Series 1002

BENEFIT

- Test probe for 30 mil centers
- Short travel
- Low contact force
- Receptacle pre-wired

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Center | 0.76 mm / 30 mil |
| Temperature Range | -40 °C - +250 °C |
| Full Travel | 2.00 mm |
| Working Travel | 1.35 mm |
| Pre-Loaded Spring Force | 0.13 N |
| Spring Force at Working Travel | 0.30 N |

ELECTRICAL DATA

| | |
|-------------------------------|------------|
| Max. Current Rating | 0.5 A |
| Typical Continuity Resistance | ≤ 150 mOhm |

MATERIALS

| | |
|--------------------|----------------------------------|
| Barrel | Bronze, gold plated |
| Spring | Stainless Steel, gold plated |
| Plunger | Steel, gold plated |
| Receptacle | Bronze, gold plated |
| Wire AWG 32 (Blue) | Copper, silver plated, insulated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 0.53 mm |
|----------------------|---------|

TIP STYLE · DIAMETER · PLATING



G3
0.28 Au

TIP STYLE · DIAMETER · PLATING



B
0.37 Rh

BENEFIT

- Test probe for 40 mil centers
- Short travel
- Low contact force
- Receptacle pre-wired

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Center | 1.02 mm / 40 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 2.00 mm |
| Working Travel | 1.35 mm |
| Pre-Loaded Spring Force | 0.25 N |
| Spring Force at Working Travel | 0.40 N |

ELECTRICAL DATA

| | |
|-------------------------------|------------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 100 mOhm |



MATERIALS

| | |
|--------------------|----------------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, rhodium plated |
| Receptacle | Bronze, gold plated |
| Wire AWG 30 (Blue) | Copper, silver plated, insulated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 0.63 mm |
|----------------------|---------|

01

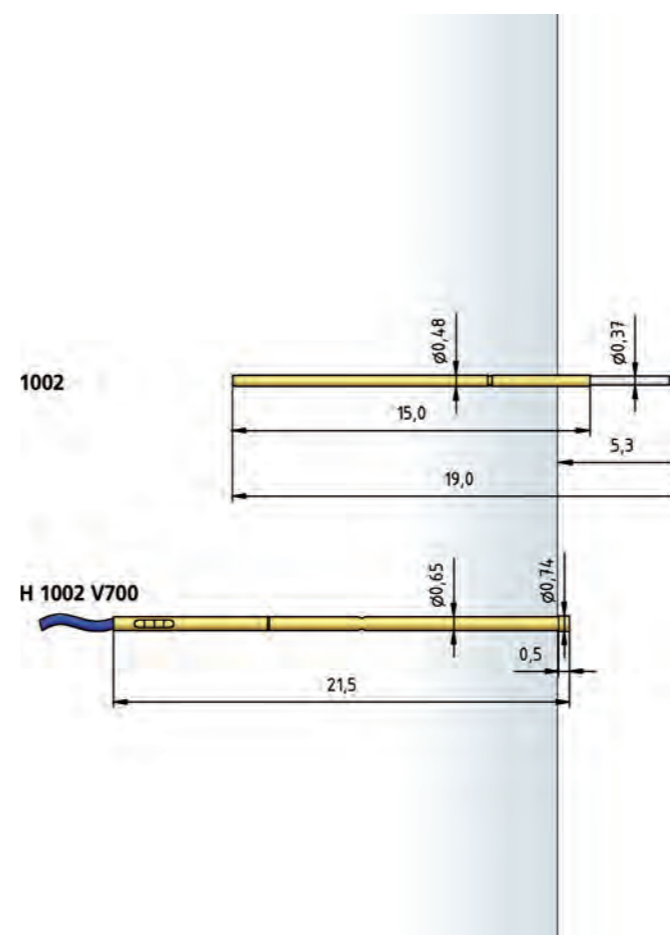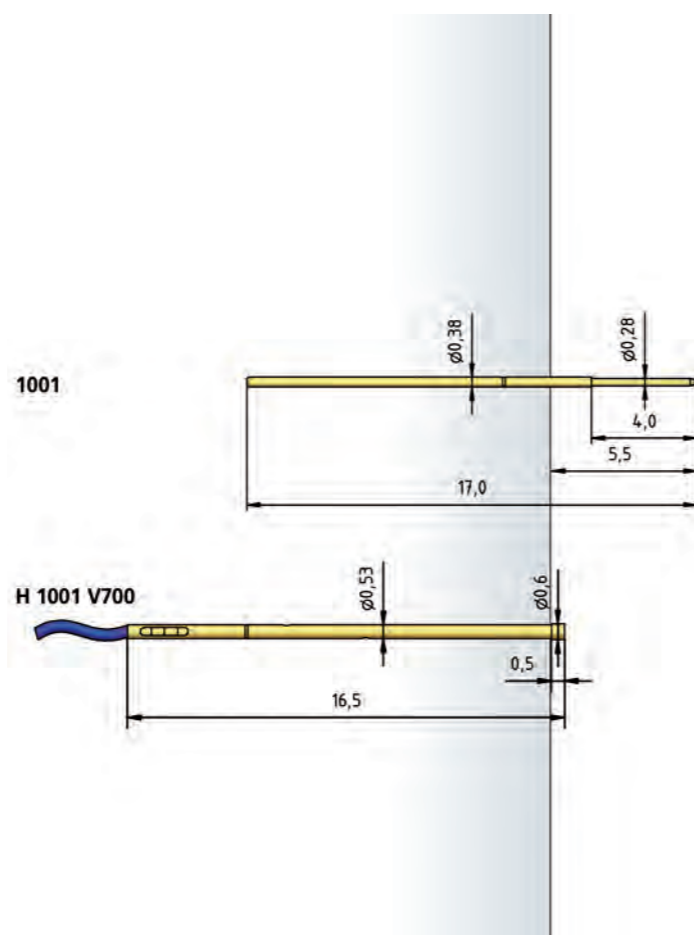

HOW TO ORDER

1001 - G3 - 0.3 N - Au - 0.28

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

HOW TO ORDER

1002 - B - 0.4 N - Rh - 0.37

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

Series 1003

Test Probe for small Centers 40 mil / 1.02 mm

Test Probe for small Centers 40 mil / 1.02 mm

Series 1005

BENEFIT

- Test probe for 40 mil centers
- Short travel
- Low contact force
- Receptacle pre-wired

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Center | 1.02 mm / 40 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 1.30 mm |
| Working Travel | 1.00 mm |
| Pre-Loaded Spring Force | 0.40 N |
| Spring Force at Working Travel | 0.75 N |

ELECTRICAL DATA

| | |
|-------------------------------|------------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 100 mOhm |

MATERIALS

| | |
|--------------------|----------------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, gold plated |
| Receptacle | Bronze, gold plated |
| Wire AWG 30 (Blue) | Copper, silver plated, insulated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 0.63 mm |
|----------------------|---------|

TIP STYLE · DIAMETER · PLATING



B
0.50 Au

TIP STYLE · DIAMETER · PLATING



B
0.35C Au

BENEFIT

- Test probe for 40 mil centers
- Short travel
- Low contact force
- Receptacle pre-wired

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Center | 1.02 mm / 40 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 3.80 mm |
| Working Travel | 3.00 mm |
| Pre-Loaded Spring Force | 0.20 N |
| Spring Force at Working Travel | 0.80 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |



MATERIALS

| | |
|---------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 0.70 mm |
|----------------------|---------|

01

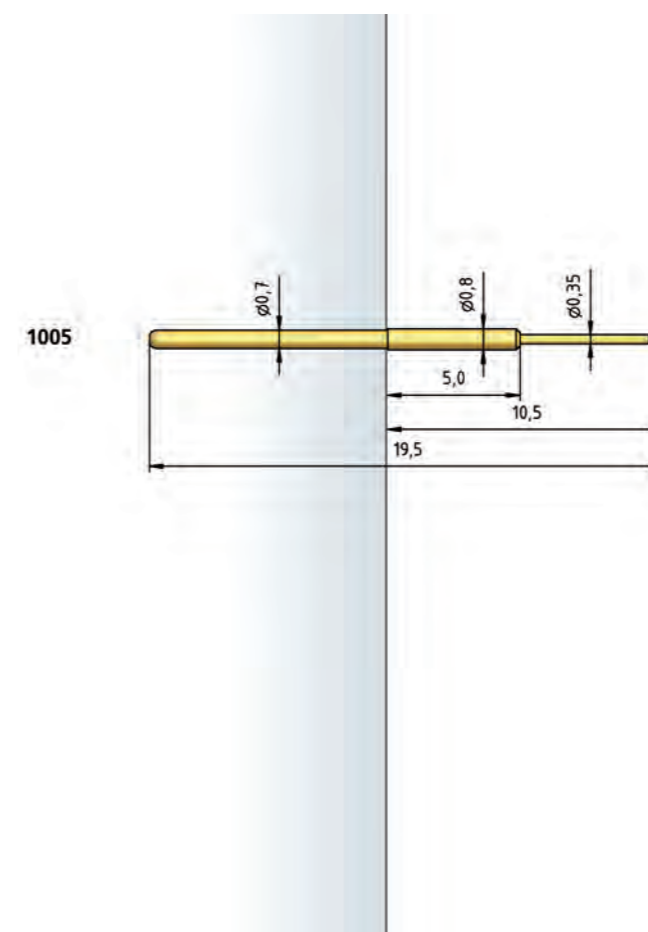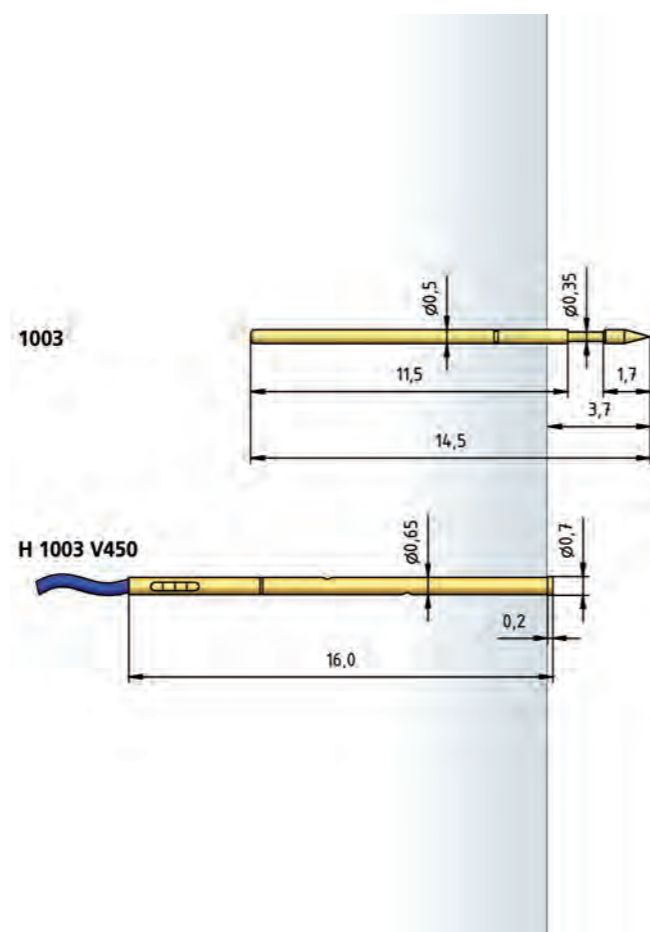

HOW TO ORDER

1003 - B - 0.75 N - Au - 0.5

1 2 3 4 5

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

HOW TO ORDER

1005 - B - 0.8 N - Au - 0.35 C

1 2 3 4 5 6

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 Tip Material (only for CuBe)

Series 1006

Test Probe for small Centers 40 mil / 1.02 mm

BENEFIT

Test probe for 40 mil centers
Short travel
Low contact force

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Center | 1.02 mm / 40 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 2.29 mm |
| Working Travel | 1.27 mm |
| Pre-Loaded Spring Force | 0.17/ 0.15 N |
| Spring Force at Working Travel | 0.37/ 0.45 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 55 mOhm |

MATERIALS

| | |
|------------|--------------------------------------|
| Barrel | Bronze, gold plated |
| Spring | Bronze, Stainless Steel, gold plated |
| Plunger | CuBe, gold plated |
| Receptacle | Bronze, gold plated |




RECOMMENDED DIAMETER OF DRILL


| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 0.71 mm |
| HGW 2372 (Glass filled Material) | 0.75 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.15 N |
| Spring Force at Working Travel | |
| (Order Index E) | 1.45 N |

TIP STYLE · DIAMETER · PLATING

| | | |
|---|---|---|
|  |  |  |
| B | D | G |
| 0.53C Au | 0.53C Au | 0.53C Au |

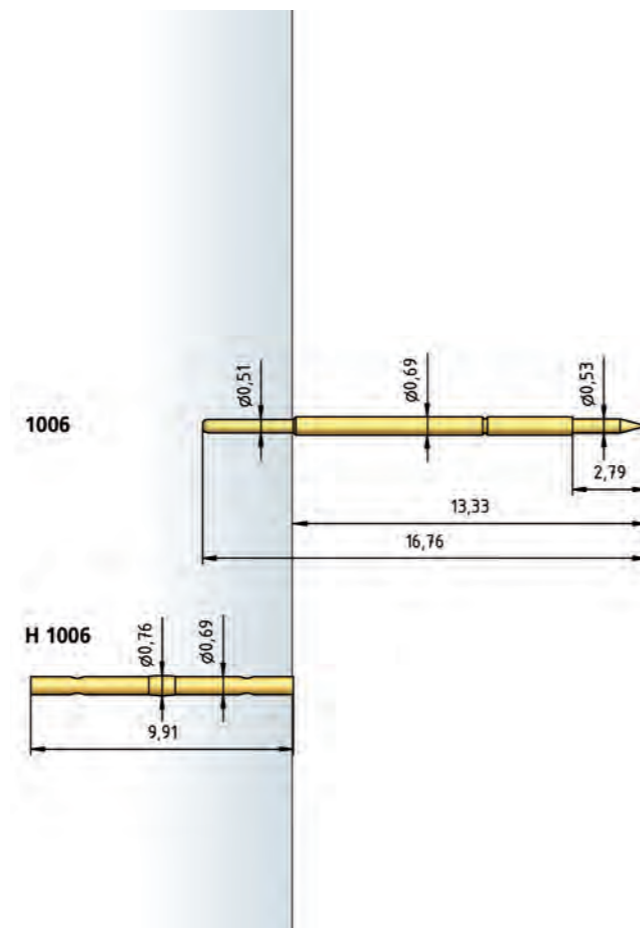

HOW TO ORDER

1006 - **B** - **0.45 N** **E** - **Au** - **0.53 C**
 1 2 3 4 5 6 7

1 Series 2 Tip Style 3 Spring Force 4 High-Temperature 5 Tip Plating
 6 Tip Diameter 7 Tip Material (only for CuBe)

STANDARD TEST PROBES

CENTER ≤ 100 mil / 2.54 mm

The Test Probe series up to 100 mil consist of models with different sizes, travel and extension heights.

This wide range of products allows multi-purpose use such as the testing of assembled components (in-circuit test or function test) or in other applications – wherever a flexible electrical connection is required.

| SERIES | CENTER | PAGE |
|---------|-------------------|------|
| 1007 | 50 mil / 1.27 mm | 38 |
| 1007.50 | 50 mil / 1.27 mm | 39 |
| 1007.60 | 50 mil / 1.27 mm | 40 |
| 1007.70 | 50 mil / 1.27 mm | 41 |
| 1010 | 75 mil / 1.91 mm | 42 |
| 1010.50 | 75 mil / 1.91 mm | 43 |
| 1011 | 75 mil / 1.91 mm | 44 |
| 1015 | 100 mil / 2.54 mm | 45 |
| 1015.50 | 100 mil / 2.54 mm | 46 |
| 1016 | 100 mil / 2.54 mm | 47 |
| 1018 | 100 mil / 2.54 mm | 48 |
| 1018.06 | 100 mil / 2.54 mm | 49 |



Series 1007

Standard-Test Probe 50 mil / 1.27 mm

BENEFIT

- Universal field of application
- Compact design
- Short travel
- Contacting of assembled PCBs

MECHANICAL DATA

| | |
|--------------------------------|--------------------|
| Center | 1.27 mm / 50 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 2.80 mm |
| Working Travel | 2.40 mm |
| Pre-Loaded Spring Force | 0.25/ 0.25/ 0.40 N |
| Spring Force at Working Travel | 0.70/ 1.00/ 1.70 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, CuBe |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 0.86 mm |
| with pressed-in Ring | 0.93 mm |
| HGW 2372 (Glass filled material) | 0.88 mm |
| with pressed-in Ring | 0.94 mm |

TIP STYLE · DIAMETER · PLATING



| | | | | |
|----------|----------|----------|----------|----------|
| A | B | C | D | D |
| 0.90 Au | 0.49C Au | 0.90C Au | 0.49 Au | 0.85C Au |



| |
|----------|
| H |
| 0.90 Au |
| 1.50 Au |

Standard-Test Probe 50 mil / 1.27 mm

TIP STYLE · DIAMETER · PLATING



| |
|-----------|
| G3 |
| 0.51 Rh |

Series 1007.50

BENEFIT

- Universal field of application
- Compact design
- Short travel
- Contacting of assembled PCBs

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Center | 1.27 mm / 50 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 2.00 mm |
| Working Travel | 1.35 mm |
| Pre-Loaded Spring Force | 0.35 N |
| Spring Force at Working Travel | 0.75 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 75 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, rhodium plated |
| Receptacle | Bronze, gold plated |



RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 0.84 mm |
| HGW 2372 | 0.86 mm |

HOW TO ORDER

1007 - A - 0.7 N - Au - 0.9 C
 1 2 3 4 5 6

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
 6 Tip Material (only for CuBe)

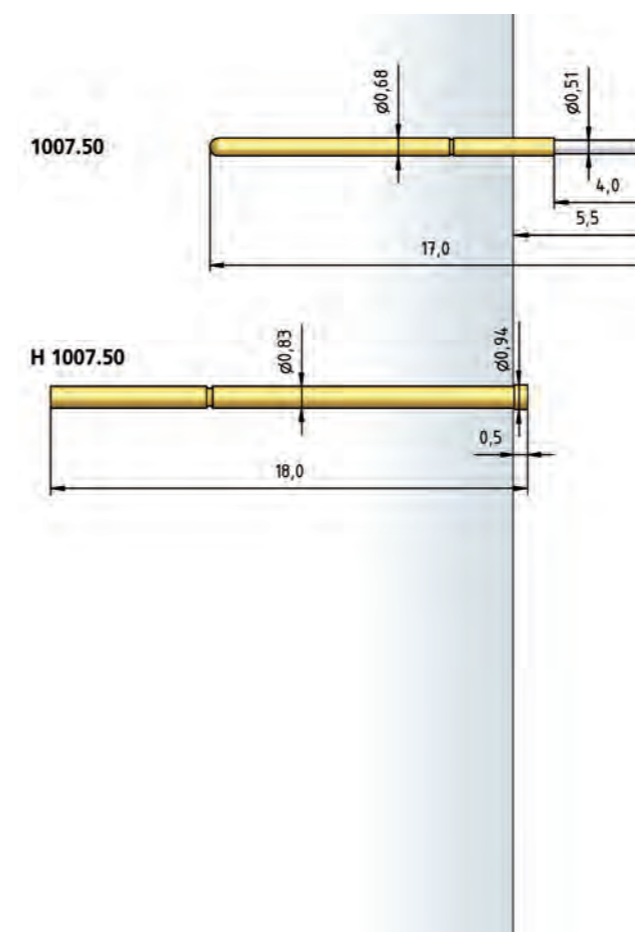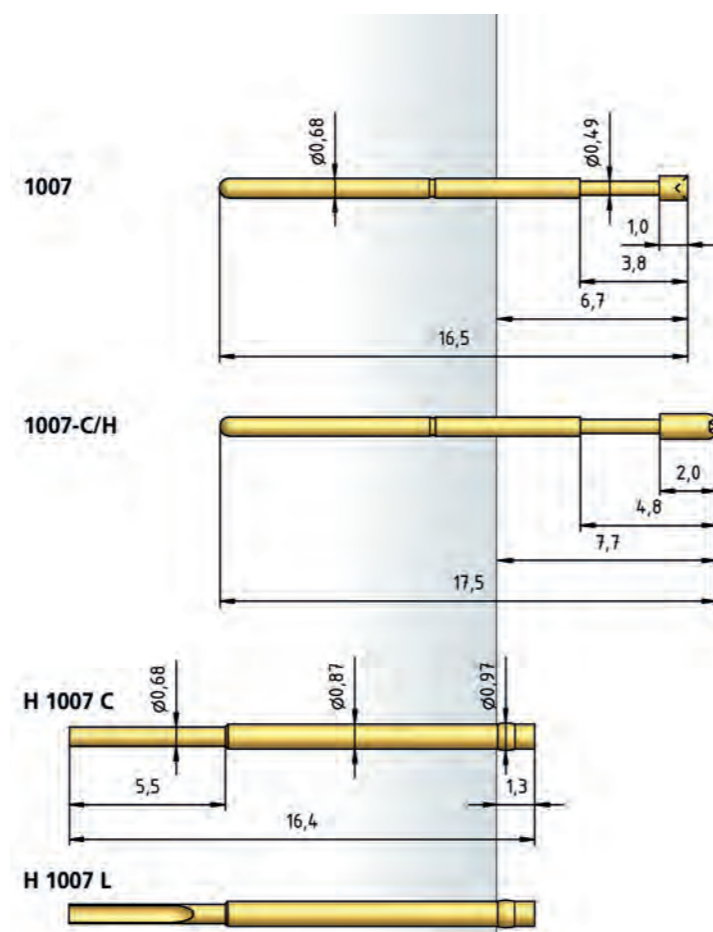

HOW TO ORDER

1007 .50 - G3 - 0.75 N - Rh - 0.51
 1 2 3 4 5 6

1 Series 2 Variant 3 Tip Style 4 Spring Force 5 Tip Plating 6 Tip Diameter

Series 1007.60

Standard-Test Probe 50 mil / 1.27 mm

BENEFIT

- Universal field of application
- Compact design
- Short travel
- Contacting of assembled PCBs

MECHANICAL DATA

| | |
|-----------------------------|------------------|
| Center | 1.27 mm / 50 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 2.54 mm |
| Pre-Loaded Spring Force | 0.20/ 0.30 N |
| Spring Force at Full Travel | 0.80/ 1.50 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |



MATERIALS

| | |
|--------------------|----------------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe, rhodium plated |
| Receptacle | Bronze, gold plated |
| Wire AWG 30 (Blue) | Copper, silver plated, insulated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 0.87 mm |
| with pressed-in Ring | 0.95 mm |
| HGW 2372 (Glass filled material) | 0.87 mm |
| with pressed-in Ring | 0.95 mm |

TIP STYLE · DIAMETER · PLATING

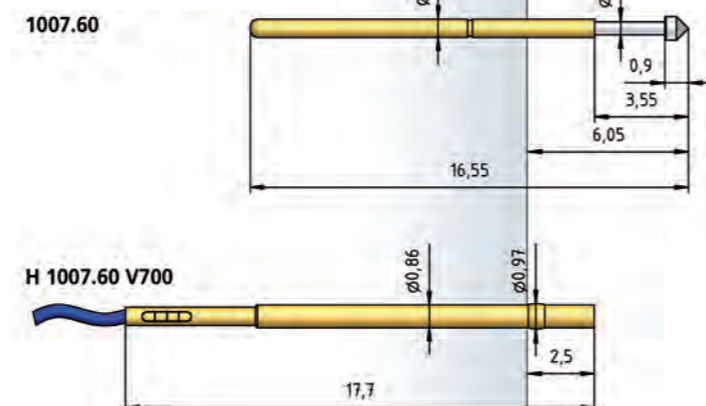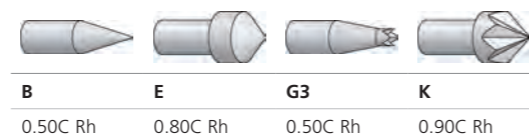



HOW TO ORDER

1007 .60 - K - 0.8 N - Rh - 0.9 C
 1 2 3 4 5 6 7

1 Series 2 Variant 3 Tip Style 4 Spring Force 5 Tip Plating 6 Tip Diameter
 7 Tip Material (only for CuBe)

Standard-Test Probe 50 mil / 1.27 mm

TIP STYLE · DIAMETER · PLATING

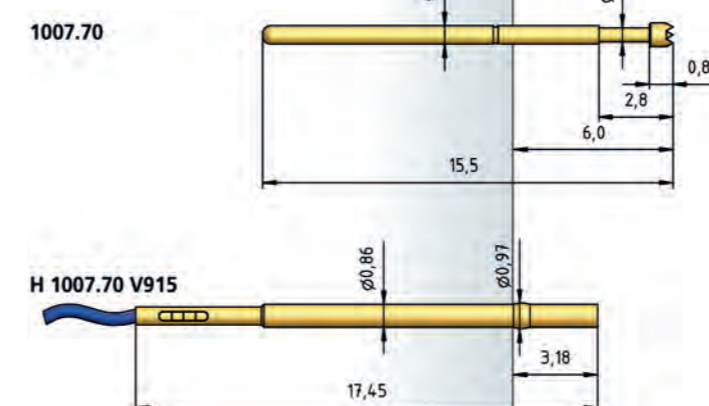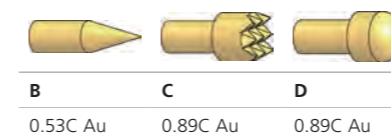

BENEFIT

- Universal field of application
- Compact design
- Short travel
- Contacting of assembled PCBs

MECHANICAL DATA

| | |
|-----------------------------|--------------------|
| Center | 1.27 mm / 50 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 1.27 mm |
| Pre-Loaded Spring Force | 0.17/ 0.40/ 0.50 N |
| Spring Force at Full Travel | 0.35/ 0.90/ 1.40 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 25 mOhm |

MATERIALS

| | |
|--------------------|--|
| Barrel | Bronze, gold plated |
| Spring | Stainless Steel, Spring Steel, gold plated |
| Plunger | CuBe, gold plated |
| Receptacle | Bronze, gold plated |
| Wire AWG 30 (Blue) | Copper, silver plated, insulated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 0.87 mm |
| with pressed-in Ring | 0.95 mm |
| HGW 2372 (Glass filled material) | 0.87 mm |
| with pressed-in Ring | 0.95 mm |

HOW TO ORDER

1007 .70 - C - 0.35 N - Au - 0.89 C
 1 2 3 4 5 6 7

1 Series 2 Variant 3 Tip Style 4 Spring Force 5 Tip Plating 6 Tip Diameter
 7 Tip Material (only for CuBe)

Series 1010

Standard-Test Probe 75 mil / 1.91 mm

BENEFIT

- Universal field of application
- Compact design
- Short travel
- Contacting of assembled PCBs

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Center | 1.91 mm / 75 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 3.00 mm |
| Working Travel | 2.40 mm |
| Pre-Loaded Spring Force | 0.30/ 0.50 N |
| Spring Force at Working Travel | 1.50/ 2.25 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 2.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|--|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, Stainless Steel, gold plated |
| Plunger | Steel, CuBe |
| Receptacle | Bronze, gold plated |






RECOMMENDED DIAMETER OF DRILL






| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.30 mm |
| with pressed-in Ring | 1.46 mm |
| HGW 2372 (Glass filled material) | 1.32 mm |
| with pressed-in Ring | 1.47 mm |



HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.20 N |
| Spring Force at Working Travel | |
| (Order Index E) | 0.80 N |

TIP STYLE · DIAMETER · PLATING

| | | | | |
|---|--|---|---|---|
|  |  |  |  |  |
| A | B | B1 | C | D |
| 1.50 Au | 0.45 Au/Ni | 0.70 Au | 1.50C Au | 0.50 Au |





| | | | | |
|---|--|---|---|---|
|  |  |  |  |  |
| D | D2 | D2 | DF | F |
| 0.65 Au 1.00 Au | 0.40 Au | 0.60 Au | 1.00 Au | 1.00 Au 1.50 Ni |

| | |
|---|--|
|  |  |
| G | H |
| 1.50 Rh | 1.50 Ni |

Standard-Test Probe 75 mil / 1.91 mm

Series 1010.50

TIP STYLE · DIAMETER · PLATING

| | | | |
|---|---|---|---|
|  |  |  |  |
| A | B | G3 | K |
| 0.72C Rh | 0.72C Rh | 0.72C Rh | 1.30C Rh 1.50C Rh |

BENEFIT

- Universal field of application
- Compact design
- Short travel
- Contacting of assembled PCBs

MECHANICAL DATA

| | |
|-----------------------------|-----------------------------------|
| Center | 1.91 mm / 75 mil |
| Temperature Range | -40 °C - +250 °C |
| Full Travel | 2.54 mm |
| Spring Force at Full Travel | see High-Temperature Applications |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Stainless Steel, unplated |
| Plunger | CuBe, rhodium plated |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.30 mm |
| with pressed-in Ring | 1.40 mm |
| HGW 2372 (Glass filled material) | 1.31 mm |
| with pressed-in Ring | 1.41 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|-----------------------------|------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.18/ 0.32 N |
| Spring Force at Full Travel | |
| (Order Index E) | 0.80/ 1.25 N |

HOW TO ORDER


1010 - A - 0.8 N E - Au - 1.5
 1 2 3 4 5 6

1 Series 2 Tip Style 3 Spring Force 4 High Temperature 5 Tip Plating
 6 Tip Diameter

1010



H 1010 C

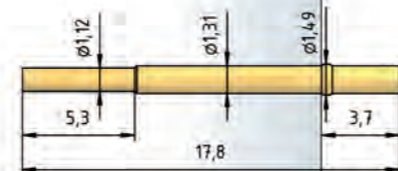


H 1010 L




H 1010 W




1010.50

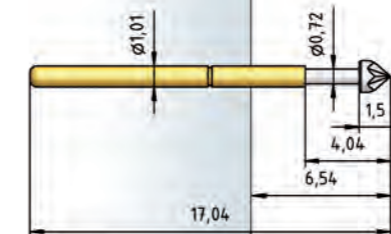

H 1010.50 W7

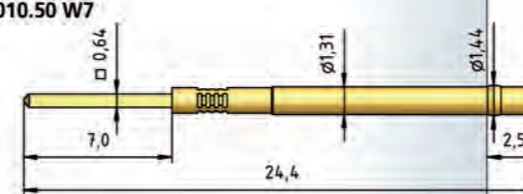

H 1010.50 W9

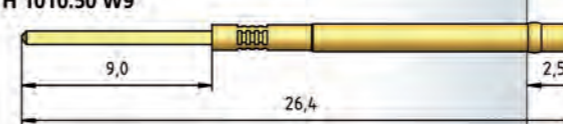

H 1010.50 WT9



HOW TO ORDER

1010 .50 - K - 1.25 N E - Rh - 1.5 C
 1 2 3 4 5 6 7 8

1 Series 2 Variant 3 Tip Style 4 Spring Force 5 High Temperature
 6 Tip Plating 7 Tip Diameter 8 Tip Material (only for CuBe)

Series 1011

Standard-Test Probe 75 mil / 1.91 mm

BENEFIT

- Universal field of application
- Compact design
- Short travel
- Contacting of assembled PCBs

MECHANICAL DATA

| | |
|-----------------------------|-----------------------------------|
| Center | 1.91 mm / 75 mil |
| Temperature Range | -40 °C - +250 °C |
| Full Travel | 4.20 mm |
| Spring Force at Full Travel | see High-Temperature Applications |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Stainless Steel, unplated |
| Plunger | CuBe, rhodium plated |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.30 mm |
| with pressed-in Ring | 1.40 mm |
| HGW 2372 (Glass filled material) | 1.31 mm |
| with pressed-in Ring | 1.41 mm |

HIGH-TEMPERATURE APPLICATIONS


| | |
|-----------------------------|------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.30/ 0.30 N |
| Spring Force at Full Travel | |
| (Order Index E) | 1.10/ 1.50 N |

TIP STYLE · DIAMETER · PLATING




A
0.72C Rh

1011

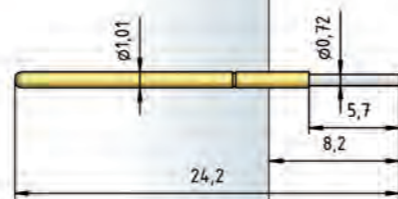

H 1011 WT7

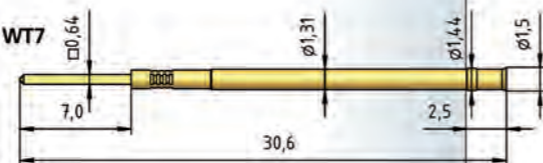

H 1011 WT9



HOW TO ORDER

1011 - A - 1.1 N E - Rh - 0.72 C

1 Series 2 Tip Style 3 Spring Force 4 High Temperature 5 Tip Plating
6 Tip Diameter 7 Tip Material (only for CuBe)

Standard-Test Probe 100 mil / 2.54 mm

TIP STYLE · DIAMETER · PLATING



| | | | | |
|------------|-----------|-------------------|-----------|------------------------------------|
| A | A6 | B | BS | C |
| 1.80 Au/Ni | 1.80C Au | 0.75 Au/ Ni/Rh | 0.38 Au | 1.00 Au 1.30C Au 1.80C Au/Ni |



| | | | | |
|------------|----------------------|----------------------|----------|---------------------------|
| C15 | C15 | C25 | D | D |
| 1.80 Au | 0.90/1.37 Au/ HTK | 1.20/1.80 Au/ HTK | 0.50 Ni | 0.65C Au/Ni 0.75 Au/Rh |




| | | | | |
|------------|------------|----------|---------------------|-----------------------|
| D | E | F | F | G |
| 1.25 Au/Ni | 1.80 Au/Ni | 0.75 Rh | 1.50C Au 1.80 Rh | 1.30 Rh 1.80 Au/Ni |



| | | |
|-------------------------------|------------|----------|
| H | K | Q |
| 1.30 Rh 1.80 Au 3.00 Rh | 1.80 Au/Ni | 0.75C Au |

H 1015 C

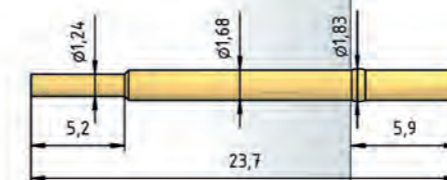

H 1015 L




H 1015 W



H 1015 WR



H 1015 C-K



H 1015 L-K



H 1015 W-K



H 1015 WR-K



BENEFIT

- Universal field of application
- Contacting of assembled PCBs
- Wide variety of types

MECHANICAL DATA

| | |
|--------------------------------|--------------------------------------|
| Center | 2.54 mm / 100 mil |
| Full Travel | 4.40 mm |
| Working Travel | 3.50 mm |
| Pre-Loaded Spring Force | 0.25/ 0.40/ 0.40/ 0.30/ 0.70/ 0.60 N |
| Spring Force at Working Travel | 0.70/ 1.00/ 1.50/ 1.70/ 2.50/ 3.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |


MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, CuBe |
| Receptacle | Bronze, gold plated |


RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.67 mm |
| with pressed-in Ring | 1.75 mm |
| HGW 2372 (Glass filled material) | 1.69 mm |
| with pressed-in Ring | 1.76 mm |

1015

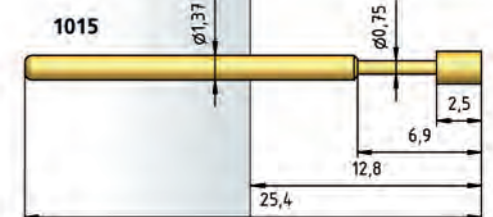

1015
only for Tip Style C15

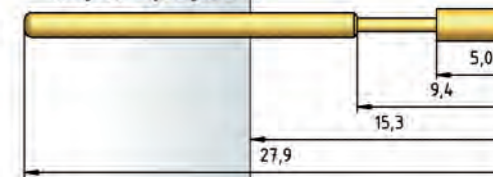

HOW TO ORDER

1015 - C - 1.5 N - Au - 1.8 C

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 Ring Contact Material (only for CuBe)

Series 1015.50

Standard-Test Probe 100 mil / 2.54 mm

Standard-Test Probe 100 mil / 2.54 mm

Series 1016

BENEFIT

Universal field of application
Contacting of assembled PCBs

MECHANICAL DATA

| | |
|-----------------------------|-----------------------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -40 °C - +250 °C |
| Full Travel | 4.20 mm |
| Spring Force at Full Travel | see High-Temperature Applications |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Stainless Steel, unplated |
| Plunger | CuBe, rhodium plated |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.66 mm |
| with pressed-in Ring | 1.81 mm |
| HGW 2372 (Glass filled material) | 1.67 mm |
| with pressed-in Ring | 1.82 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|-----------------------------|--------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.35/ 0.50/ 0.70 N |
| Spring Force at Full Travel | |
| (Order Index E) | 1.00/ 1.50/ 2.50 N |

TIP STYLE · DIAMETER · PLATING



A
1.35C Rh

TIP STYLE · DIAMETER · PLATING



A 1.80 Au **B** 1.00 Au **C** 1.80 Ni **D** 1.00 Au **F** 1.80 Au



H 1.80 Rh **K** 1.80 Rh **Q** 1.80 Ni/Rh

BENEFIT

Universal field of application
Contacting of assembled PCBs

MECHANICAL DATA

| | |
|--------------------------------|--------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 4.40 mm |
| Working Travel | 3.50 mm |
| Pre-Loaded Spring Force | 0.40/ 0.70/ 0.90 N |
| Spring Force at Working Travel | 1.50/ 2.25/ 3.00 N |

ELECTRICAL DATA





| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.67 mm |
| with pressed-in Ring | 1.75 mm |
| HGW 2372 (Glass filled material) | 1.69 mm |
| with pressed-in Ring | 1.76 mm |

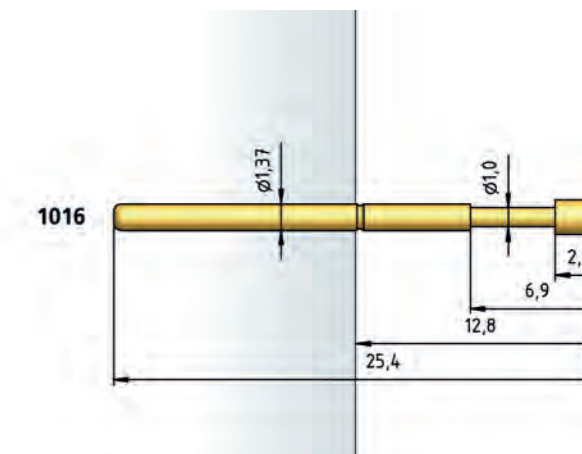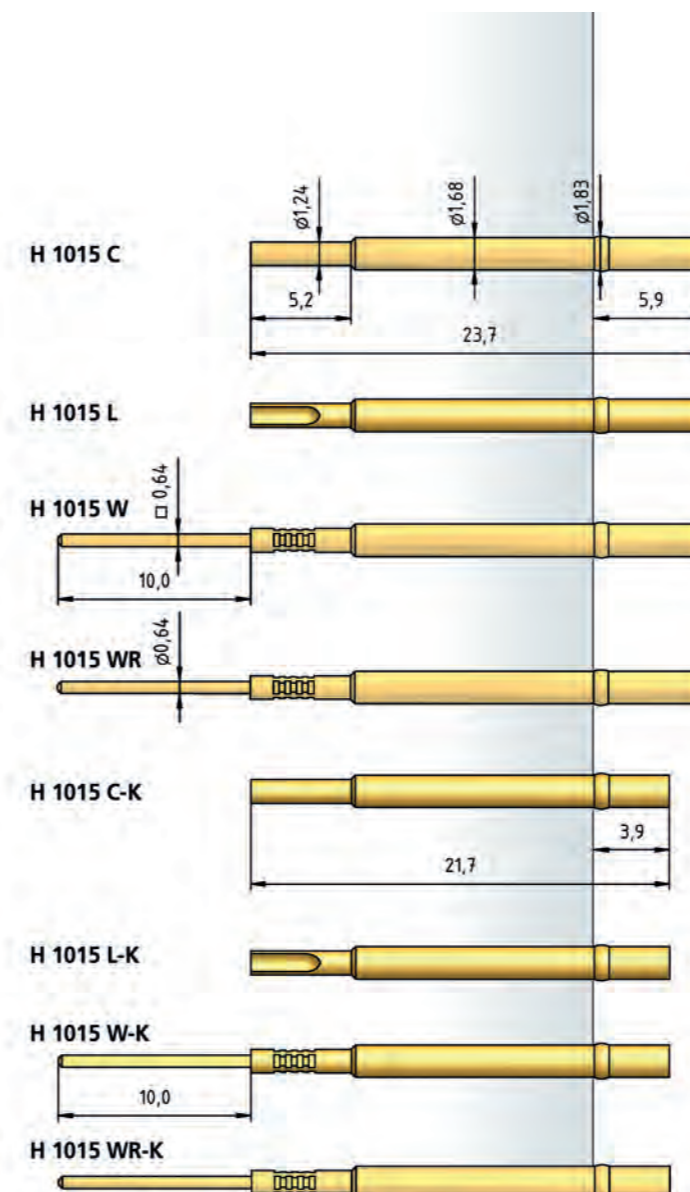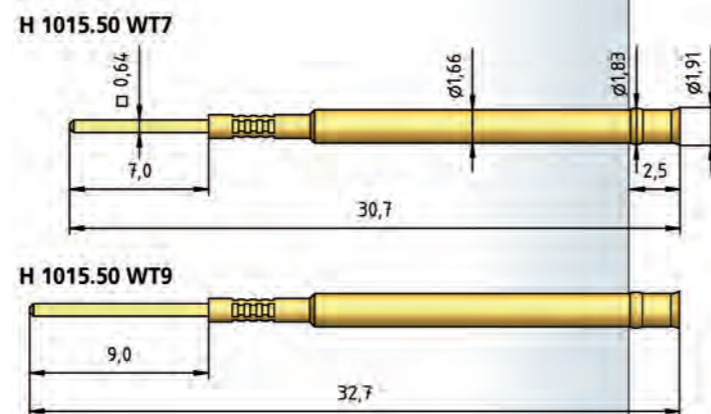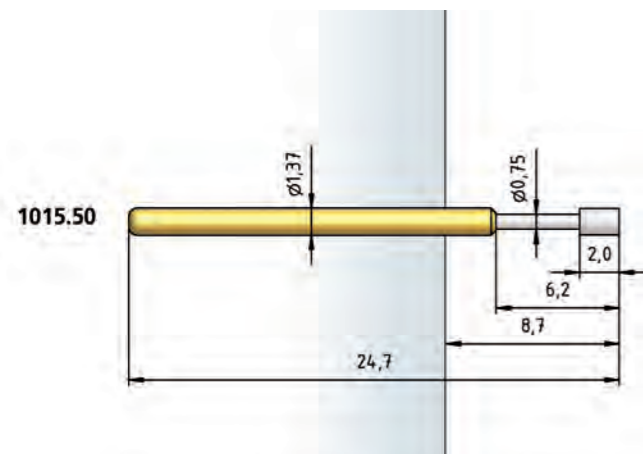

HOW TO ORDER

1015 .50 - A - 1.5 N E - Rh - 1.35 C
1 2 3 4 5 6 7 8

1 Series 2 Variant 3 Tip Style 4 Spring Force 5 High Temperature 6 Tip Plating
7 Tip Diameter 8 Tip Material (only for CuBe)

HOW TO ORDER

1016 - C - 1.5 N - Au - 1.8
1 2 3 4 5

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

Series 1018

Standard-Test Probe 100 mil / 2.54 mm

Standard-Test Probe 100 mil / 2.54 mm

Series 1018.06

BENEFIT

Universal field of application
Contacting of assembled PCBs

MECHANICAL DATA

| | |
|--------------------------------|--------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 4.40 mm |
| Working Travel | 3.50 mm |
| Pre-Loaded Spring Force | 0.40/ 0.70/ 0.90 N |
| Spring Force at Working Travel | 1.50/ 2.25/ 3.00 N |

ELECTRICAL DATA


| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL


| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.67 mm |
| with pressed-in Ring | 1.75 mm |
| HGW 2372 (Glass filled material) | 1.69 mm |
| with pressed-in Ring | 1.76 mm |

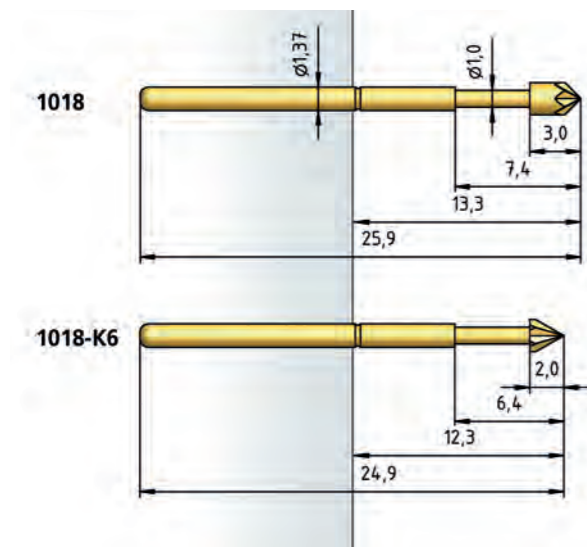

TIP STYLE · DIAMETER · PLATING



| K | K6 | TA |
|---------|---------|---------|
| 1.90 Ni | 1.90 Ni | 1.20 Rh |
| 2.50 Rh | | 1.90 Rh |
| 3.50 Ni | | |

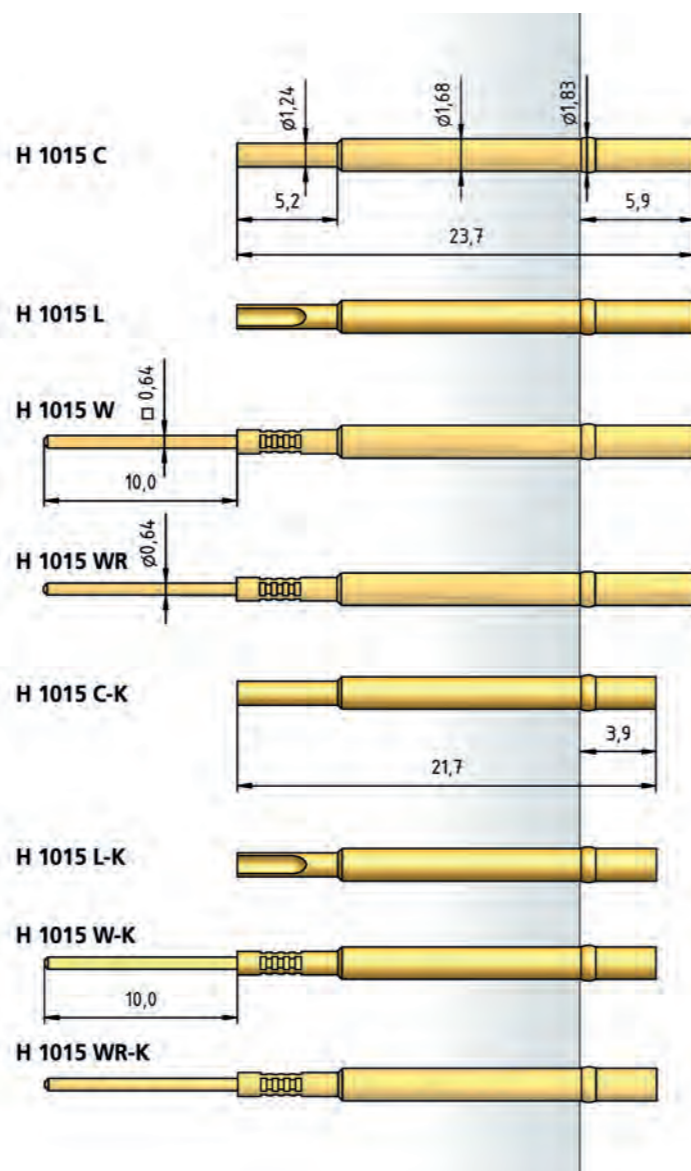

HOW TO ORDER


1018 - K - 1.5 N - Ni - 1.9

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

TIP STYLE · DIAMETER · PLATING



| G6 | H6 |
|---------|----------|
| 1.54 Au | 1.90C Au |

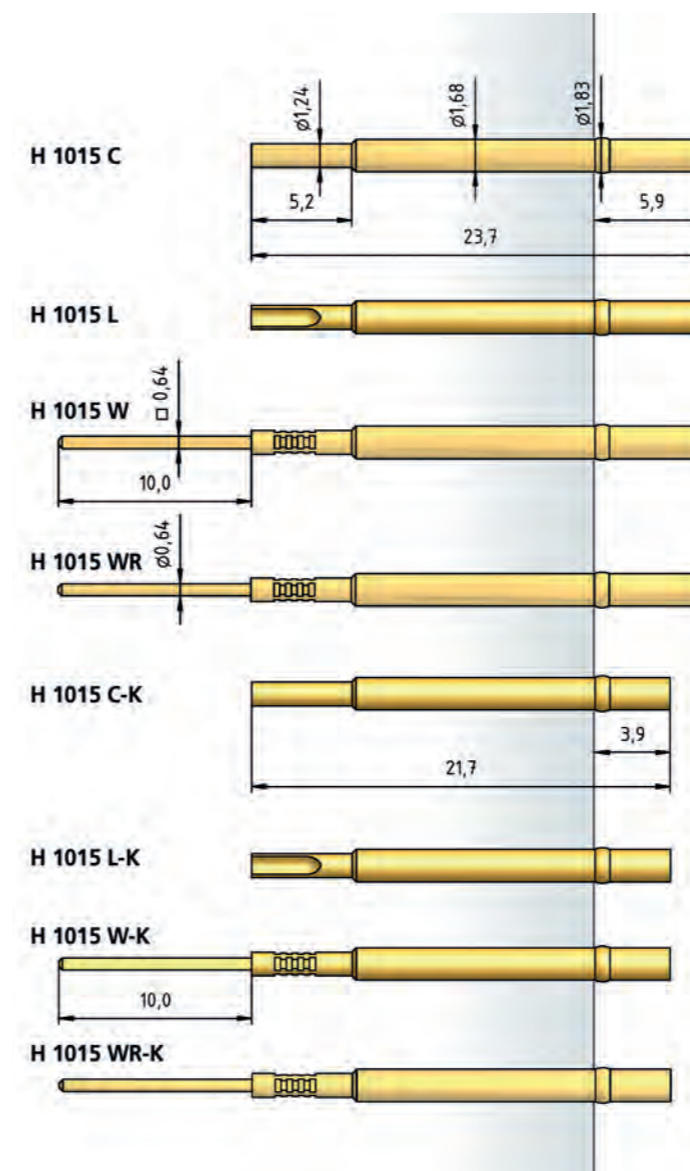

BENEFIT

Universal field of application
Contacting of assembled PCBs

MECHANICAL DATA

| | |
|--------------------------------|-------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 4.10 mm |
| Working Travel | 2.70 mm |
| Pre-Loaded Spring Force | 0.60 N |
| Spring Force at Working Travel | 1.80 N |

ELECTRICAL DATA


| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.67 mm |
| with pressed-in Ring | 1.75 mm |
| HGW 2372 (Glass filled material) | 1.69 mm |
| with pressed-in Ring | 1.76 mm |

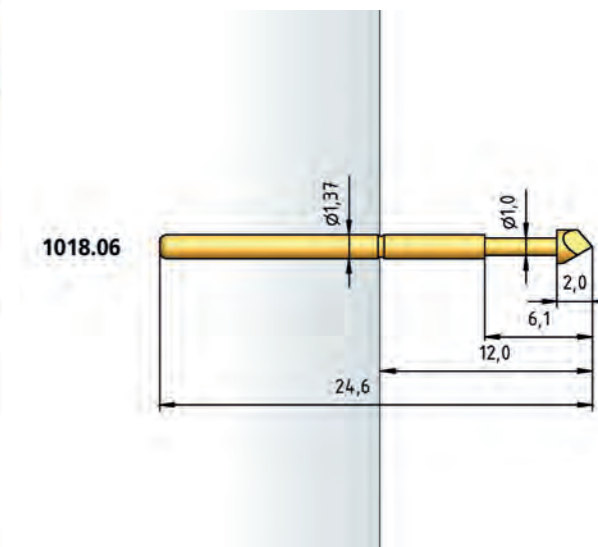

HOW TO ORDER

1018 .06 - H6 - 1.0 N - Au - 1.9 C

1 Series 2 Variant 3 Tip Style 4 Spring Force 5 Tip Plating 6 Tip Diameter
7 Tip Material (only for CuBe)

STANDARD- TEST PROBES

CENTER > 100 mil / 2.54 mm

The range of universal Test Probes for Centers > 100 mil comprises types for centers up to 177 mil / 4.75 mm.

They can be used for ICT/FTs (in-circuit test or function test) of components, burn-in / run-in tests, and for applications up to the testing of connectors on cable harnesses for the automotive industry. The use of suitable probes allows temperature ranges from -30°C up to 250°C to be achieved (see page 14).

| SERIES | CENTER | PAGE |
|--------------|-------------------|------|
| 1030 | 125 mil / 3.18 mm | 52 |
| 1054 | 138 mil / 3.50 mm | 53 |
| 1040 | 160 mil / 4.00 mm | 54 |
| 1050 | 160 mil / 4.00 mm | 55 |
| 1060 | 160 mil / 4.00 mm | 56 |
| 1051 · 1061 | 160 mil / 4.00 mm | 57 |
| 1041 · 1041W | 177 mil / 4.50 mm | 58 |
| 1042 | 177 mil / 4.50 mm | 59 |
| 1055 | 177 mil / 4.50 mm | 60 |



Series 1030

Standard-Test Probe 125 mil / 3.18 mm

BENEFIT

- Stable design
- Height-adjustable installation by using receptacle with press ring
- Contacting of assembled PCBs
- Universal applications

MECHANICAL DATA

| | |
|--------------------------------|--------------------|
| Center | 3.18 mm / 125 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 6.30 mm |
| Working Travel | 5.00 mm |
| Pre-Loaded Spring Force | 0.40/ 0.60/ 0.70 N |
| Spring Force at Working Travel | 1.50/ 2.25/ 3.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.32 mm |
| with pressed-in Ring | 2.54 mm |
| HGW 2372 (Glass filled material) | 2.34 mm |
| with pressed-in Ring | 2.56 mm |

TIP STYLE · DIAMETER · PLATING



| | | | | |
|--------------------|----------|------------|----------------------------------|----------|
| A | B | C | D | E |
| 1.30 Rh 2.50 Au | 1.30 Au | 2.50 Au/Ni | 1.30 Au 1.60 Au/Ni 2.50 Au | 2.50 Au |



| | | |
|-----------------------|----------|----------|
| F | G | H |
| 2.50 Au/Ni 4.00 Au | 2.50 Rh | 2.50 Au |

Standard-Test Probe 138 mil / 3.50 mm

TIP STYLE · DIAMETER · PLATING



| | | | | |
|----------|----------|----------|----------|--------------------|
| A | B | C | D | D |
| 3.96 Au | 1.52 Rh | 3.96 Au | 1.45 Au | 2.36 Au 3.96 Au |



| | | |
|-----------------------|----------|----------|
| E | F | G |
| 2.36 Au/Rh 3.96 Au | 1.45 Au | 1.45 Ni |

BENEFIT

- Stable design
- Height-adjustable installation by using receptacle with press ring
- Contacting of assembled PCBs
- Universal applications

MECHANICAL DATA

| | |
|--------------------------------|--------------------------|
| Center | 3.50 mm / 138 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 6.40 mm |
| Working Travel | 5.10 mm |
| Pre-Loaded Spring Force | 0.40/ 0.40/ 0.50/ 1.00 N |
| Spring Force at Working Travel | 1.00/ 1.50/ 2.50/ 3.00 N |

ELECTRICAL DATA



| | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|----------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Nickel Silver, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.71 mm |
| with pressed-in Ring | 2.89 mm |
| HGW 2372 (Glass filled material) | 2.67 mm |
| with pressed-in Ring | 2.85 mm |

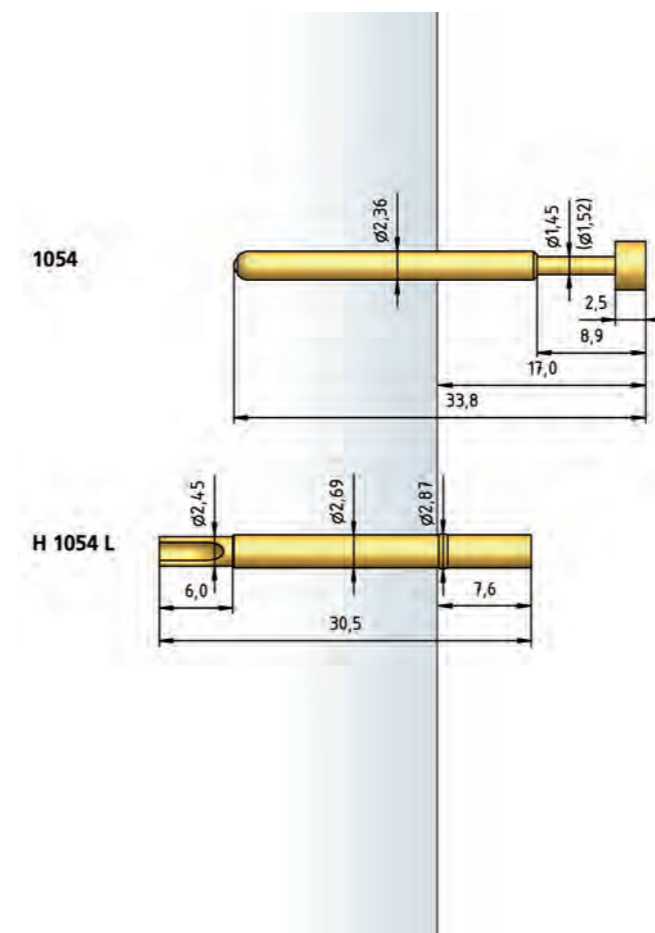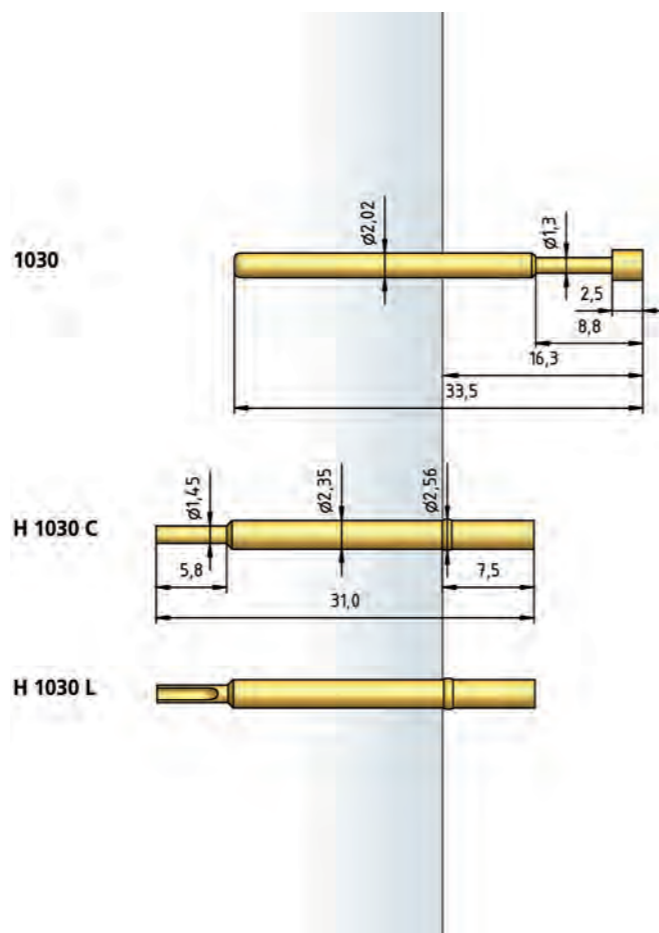

HOW TO ORDER

1030 - A - 1.5 N - Au - 2.5

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

HOW TO ORDER

1054 - C - 2.5 N - Au - 3.96 C

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 Tip Material (only for CuBe)

Series 1040

Standard-Test Probe 160 mil / 4.00 mm

BENEFIT

- Stable design
- Height-adjustable installation by using receptacle with press ring
- Contacting of assembled PCBs
- Universal applications

MECHANICAL DATA

| | |
|--------------------------------|--------------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.50 mm |
| Working Travel | 4.40 mm |
| Pre-Loaded Spring Force | 0.50/ 0.70/ 0.80/ 1.50 N |
| Spring Force at Working Travel | 1.50/ 2.25/ 3.00/ 5.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |



MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 2.99 mm |
| HGW 2372 | 3.00 mm |

TIP STYLE · DIAMETER · PLATING

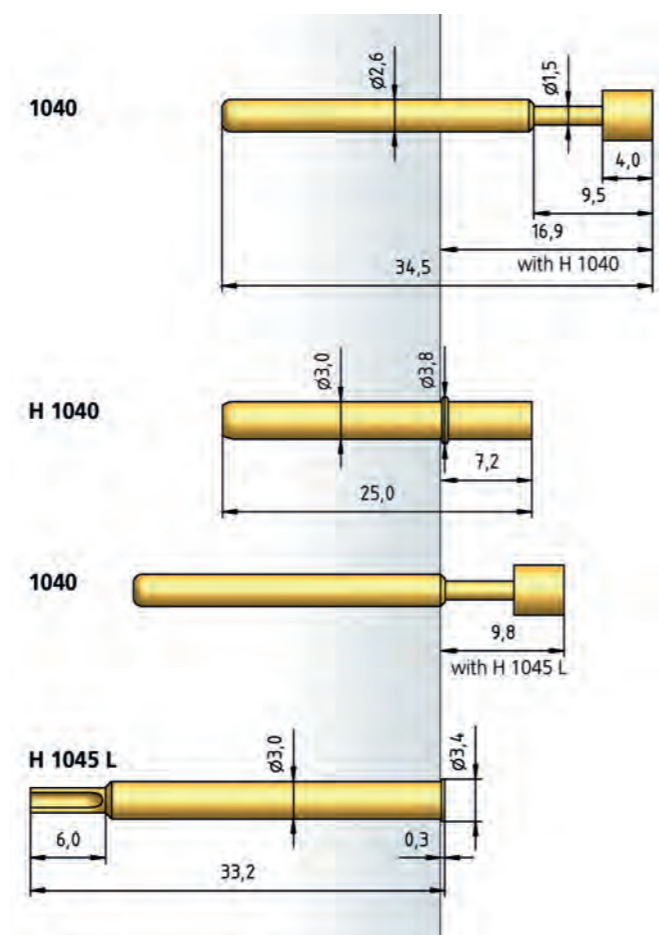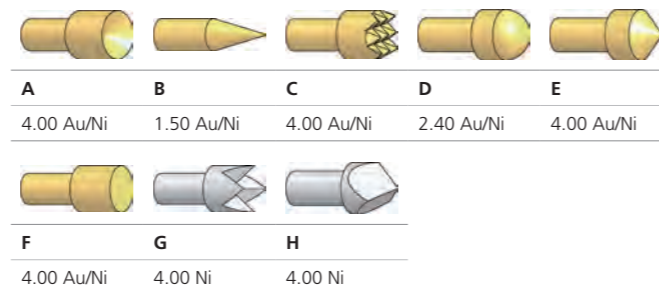

HOW TO ORDER



1040 - F - 1.5 N - Au - 4.0

1 2 3 4 5

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

Standard-Test Probe 160 mil / 4.00 mm

TIP STYLE · DIAMETER · PLATING

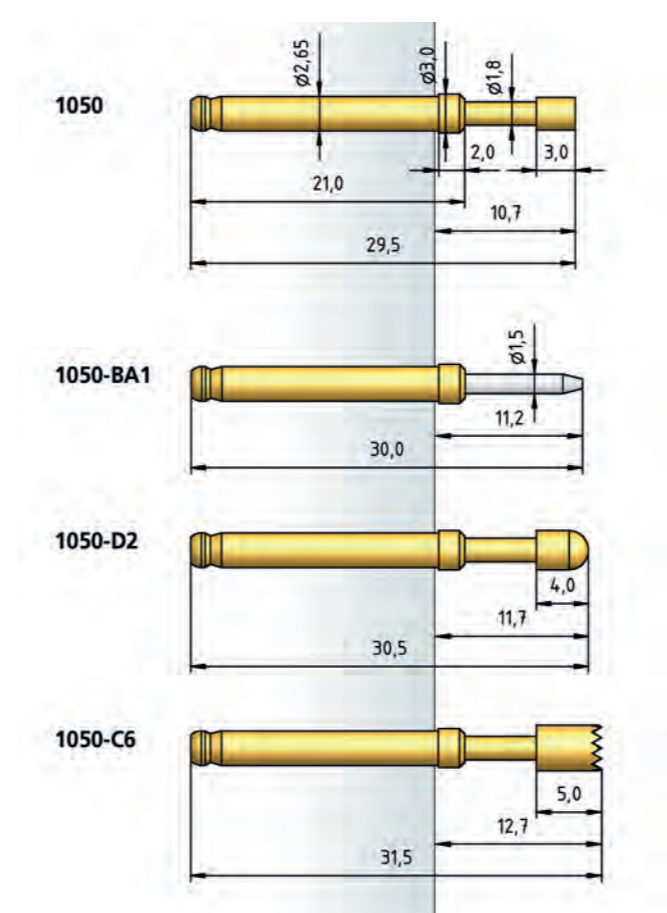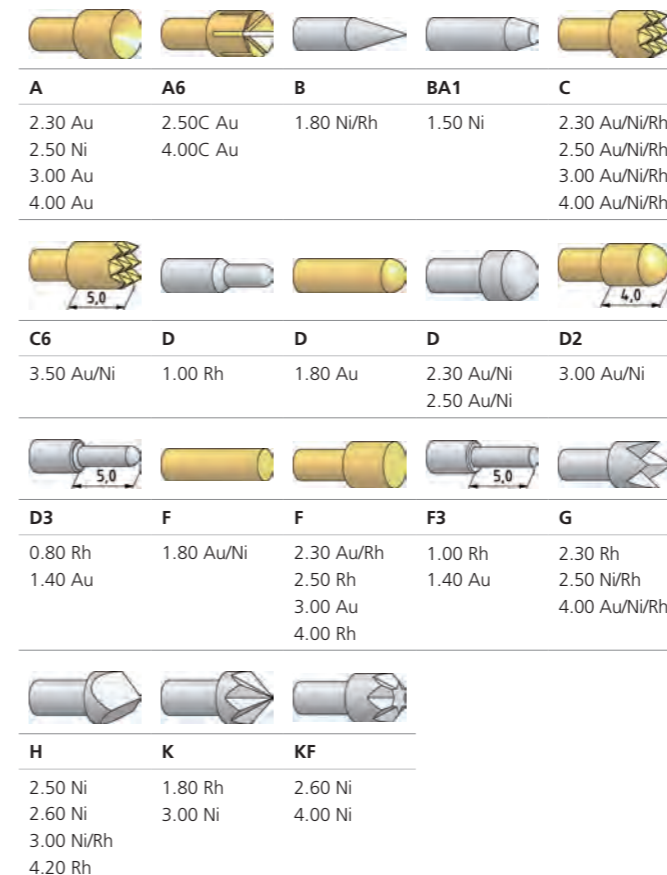

BENEFIT

- Stable design
- Contacting of assembled PCBs
- Universal applications

MECHANICAL DATA

| | |
|--------------------------------|--------------------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.50 mm |
| Working Travel | 4.40 mm |
| Pre-Loaded Spring Force | 0.20/ 0.20/ 0.40/ 1.00/ 1.00 N |
| Spring Force at Working Travel | 0.40/ 0.80/ 1.50/ 3.00/ 5.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, CuBe, gold plated |
| Receptacle | Nickel Silver, unplated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 3.00 mm |
| HGW 2372 | 3.01 mm |

Receptacles see page 57
Distance rings see page 57

HOW TO ORDER

1050 - A6 - 1.5 N - Au - 4.0 C

1 2 3 4 5 6

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 Tip Material (only for CuBe)

Series 1060

Standard-Test Probe 160 mil / 4.00 mm

BENEFIT

Stable design
Contacting of assembled PCBs
Universal applications

MECHANICAL DATA

| | |
|--------------------------------|--------------------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.50 mm |
| Working Travel | 4.40 mm |
| Pre-Loaded Spring Force | 0.20/ 0.40/ 0.50/ 0.80/ 0.70 N |
| Spring Force at Working Travel | 0.60/ 1.50/ 2.25/ 3.00/ 5.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------|--|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, Stainless Steel, gold plated |
| Plunger | Steel, CuBe, gold plated |
| Receptacle | Nickel Silver, unplated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 3.00 mm |
| HGW 2372 | 3.01 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|--------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.40/ 0.50/ 0.80 N |
| Spring Force at Working Travel | |
| (Order Index E) | 1.50/ 2.25/ 3.00 N |

TIP STYLE · DIAMETER · PLATING



| A | A6 | B | BA1 | C |
|---------|----------|------------|---------|---------------|
| 2.30 Au | 2.50C Au | 1.80 Ni/Rh | 1.50 Ni | 2.30 Au/Ni/Rh |
| 2.50 Ni | 4.00C Au | | | 2.50 Au/Ni/Rh |
| 3.00 Au | | | | 3.00 Au/Ni/Rh |
| 4.00 Au | | | | 4.00 Au/Ni/Rh |



| C6 | D | D | D | D2 |
|------------|---------|---------|------------|------------|
| 3.50 Au/Ni | 1.00 Rh | 1.80 Au | 2.30 Au/Ni | 3.00 Au/Ni |
| | | | 2.50 Au/Ni | |



| D3 | F | F | F3 | G |
|---------|------------|------------|---------|---------------|
| 0.80 Rh | 1.80 Au/Ni | 2.30 Au/Rh | 1.00 Rh | 2.30 Rh |
| 1.40 Au | | 2.50 Rh | 1.40 Au | 2.50 Ni/Rh |
| | | 3.00 Au | | 4.00 Au/Ni/Rh |
| | | 4.00 Rh | | |



| H | K | KF |
|------------|---------|---------|
| 2.50 Ni | 1.80 Rh | 2.60 Ni |
| 2.60 Ni | 3.00 Ni | 4.00 Ni |
| 3.00 Ni/Rh | | |
| 4.20 Rh | | |

Standard-Test Probe 160 mil / 4.00 mm

TIP STYLE · DIAMETER · PLATING



| B | BA |
|---------|---------|
| 1.80 Ni | 1.80 Ni |

BENEFIT

Stable design
Increased installation height
Contacting of assembled PCBs
Universal applications

MECHANICAL DATA

| | |
|--------------------------------|--------------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 7.00 mm |
| Working Travel | 5.60 mm |
| Pre-Loaded Spring Force | 0.15/ 0.25/ 0.40/ 0.60 N |
| Spring Force at Working Travel | 0.70/ 0.80/ 1.50/ 3.00 N |

ELECTRICAL DATA


| | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 35 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Nickel Silver, unplated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 3.00 mm |
| HGW 2372 | 3.01 mm |



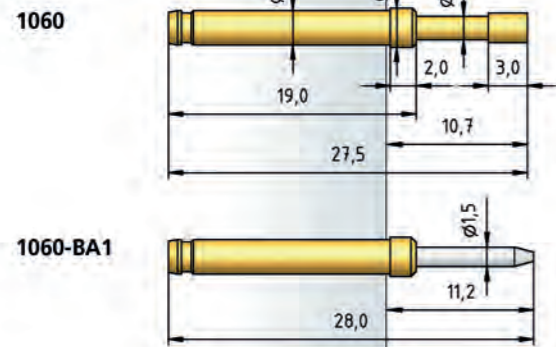


Receptacles see page 57
Distance rings see page 57

HOW TO ORDER

1060 - A6 - 1.5 N E - Au - 4.0 C

1 Series 2 Tip Style 3 Spring Force 4 High Temperature 5 Tip Plating
6 Tip Diameter 7 Tip Material (only for CuBe)

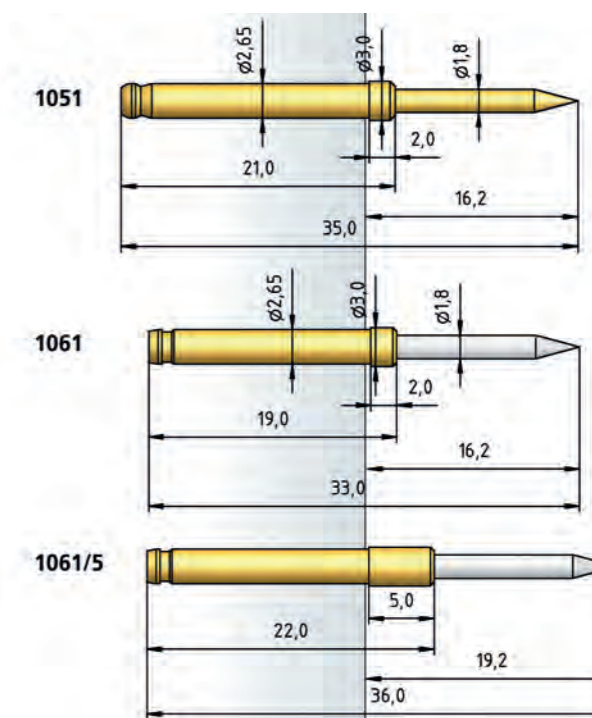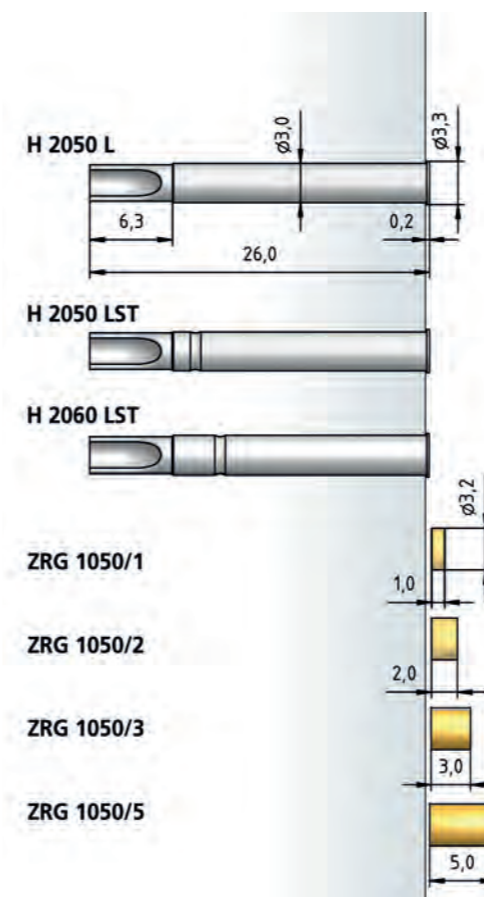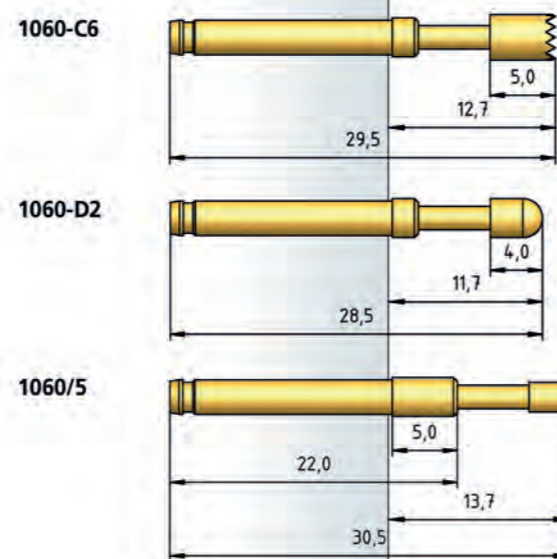

HOW TO ORDER

1051 - B - 1.5 N - Ni - 1.8

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

Series 1041 • 1041/W

Standard-Test Probe 177 mil / 4.50 mm

BENEFIT

Stable design
Contacting of assembled PCBs
Universal applications

MECHANICAL DATA

| | |
|--------------------------------|--------------------|
| Center | 4.50 mm / 177 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.50 mm |
| Working Travel | 4.80 mm |
| Pre-Loaded Spring Force | 0.25/ 0.75/ 0.60 N |
| Spring Force at Working Travel | 1.50/ 3.00/ 5.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 3.50 mm |
| HGW 2372 | 3.52 mm |

TIP STYLE · DIAMETER · PLATING



| A | B | BA | C | D |
|-----------------------|------------|------------|--|---------|
| 2.50 Ni/Rh 4.00 Au | 1.80 Ni/Rh | 1.80 Au/Ni | 2.30 Au/Ni/Rh 3.00 Au/Ni 4.00 Au/Ni/Rh | 2.30 Au |



| F | F3 | G |
|--------------------|---------|--------------------|
| 2.30 Au 4.00 Au | 1.00 Rh | 2.30 Rh 4.00 Au |

Standard-Test Probe 177 mil / 4.50 mm

TIP STYLE · DIAMETER · PLATING



| C | C | F | G | H |
|---------|------------|---------|---------|---------|
| 1.85 Ni | 4.00 Au/Ni | 4.00 Ni | 1.85 Ni | 4.00 Rh |

BENEFIT

Stable design
Test probe with continuous plunger
Contacting of assembled PCBs
Universal applications
Also for use with higher currents

MECHANICAL DATA

| | |
|--------------------------------|---------------------------------------|
| Center | 4.50 mm / 177 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 7.00 mm |
| Working Travel | 5.60 mm |
| Pre-Loaded Spring Force | 0.40/ 0.50/ 0.60/ 1.00/ 3.50/ 3.00 N |
| Spring Force at Working Travel | 1.50/ 2.25/ 3.00/ 4.50/ 6.00/ 12.50 N |

ELECTRICAL DATA

Connector Receptacle

| | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

Connector Plunger



| | |
|-------------------------------|-----------|
| Max. Current Rating | 12.0 A |
| Typical Continuity Resistance | ≤ 15 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, CuBe, gold plated |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 3.50 mm |
| HGW 2372 | 3.52 mm |

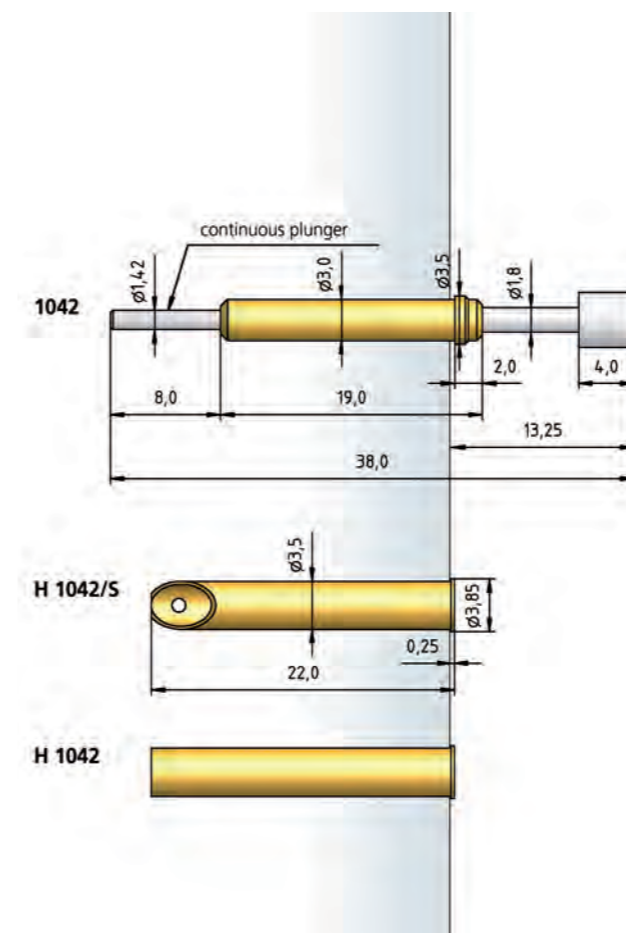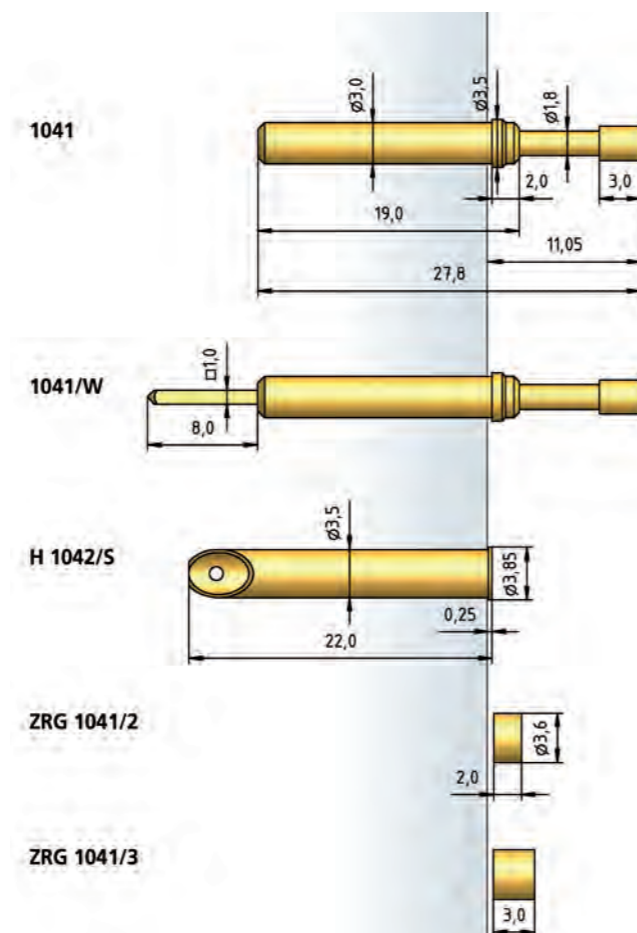

HOW TO ORDER

1041 - W - C - 1.5 N - Au - 4.0/ MH5.5
1 2 3 4 5 6 7

1 Series 2 Wire-Wrap Connector 3 Tip Style 4 Spring Force 5 Tip Plating
6 Tip Diameter 7 Full Travel

HOW TO ORDER

1042 - C - 1.5 N - Au - 4.0
1 2 3 4 5

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

Series 1055

Standard-Test Probe 177 mil / 4.50 mm

BENEFIT

Stable design
 Height-adjustable installation by using receptacle with press ring
 Contacting of assembled PCBs
 Universal applications

MECHANICAL DATA

Center 4.50 mm / 177 mil
 Temperature Range -30 °C - +120 °C
 Full Travel 6.40 mm
 Working Travel 5.10 mm
 Pre-Loaded Spring Force 0.60/ 1.00 N
 Spring Force at Working Travel 2.25/ 4.75 N

ELECTRICAL DATA

Max. Current Rating 8.0 A
 Typical Continuity Resistance ≤ 20 mOhm

MATERIALS


Barrel Bronze, gold plated
 Spring Spring Steel, gold plated
 Plunger Steel, CuBe, gold or rhodium plated
 Receptacle Bronze, gold plated

RECOMMENDED DIAMETER OF DRILL

HP 2361.1 (Trolitax) 3.54 mm
 HGW 2372 3.60 mm

TIP STYLE · DIAMETER · PLATING

| A | B | C | D2 | G2 |
|---------|---------|---------|----------|---------|
| 2.36 Rh | 2.03 Rh | 3.96 Rh | 2.03C Au | 1.30 Rh |

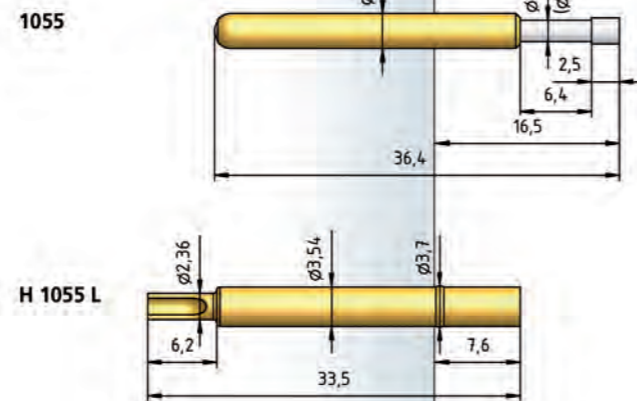**HOW TO ORDER**

1055 - **D2** - **2.25 N** - **Au** - **2.03 C**

1 2 3 4 5 6

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
 6 Tip Material (only for CuBe)

ICT-TEST PROBES (E-SERIES)

The range of ICT Test Probes comprises all standard series of products which have established themselves on the market as international standards.

These are test probes for centers from 50 mil to 100 mil with a large selection of different tip styles and contact pressures for almost all test requirements. In addition, test probe units with a longer test probe travel are available for 2-level adaptations. Receptacles with a press ring can be supplied for this series. This press ring can be used as a stop to achieve a constant extension height in the adapter, but it also allows variable heights if the press ring is pressed into a defined setting in the take-up drill hole.

The ICT receptacles are available for various types of connections. In addition to these standards, PTR also offers metric types for the ICT/FT. In this case, the receptacles are normally pressed into the take-up drill hole as far as the stop. Here, too, test probe barrels with different collar heights allow variable extension heights in the adapter.



Component Check in the In-Circuit Test

In-circuit tests are used to recognize faulty installed components as soon as possible. Using defined test points, and on installed PCBs, the electrical data, the correct position and the direction of installation of the individual components are tested. In this way, and in conjunction with a function test, faulty components can be quickly recognized and additional costs avoided on the customer's premises.

| SERIES | CENTER | PAGE |
|------------------|-------------------|------|
| 1004/E | 40 mil / 1.00 mm | 64 |
| 1008/E | 50 mil / 1.27 mm | 65 |
| 1008/E.50 | 50 mil / 1.27 mm | 66 |
| 1012/E | 75 mil / 1.91 mm | 67 |
| 1013/Z | 75 mil / 1.91 mm | 68 |
| 1025/E | 100 mil / 2.54 mm | 69 |
| 1034 | 100 mil / 2.54 mm | 70 |
| 1034/E | 100 mil / 2.54 mm | 71 |
| 1036 | 100 mil / 2.54 mm | 72 |
| 1036/E | 100 mil / 2.54 mm | 73 |
| 2021 · 1021 | 100 mil / 2.54 mm | 74 |
| 2024 · 1024 | 100 mil / 2.54 mm | 75 |
| 2028 · 1028 | 100 mil / 2.54 mm | 76 |
| 2029 | 100 mil / 2.54 mm | 77 |
| Receptacles 1012 | | 78 |
| Receptacles 1025 | | 79 |



Series 1004/E

ICT-Test Probe 40 mil / 1.00 mm

BENEFIT

International standard for 40 mil applications
Contacting of assembled PCBs

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Center | 1.00 mm / 40 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 6.40 mm |
| Working Travel | 4.30 mm |
| Pre-Loaded Spring Force | 0.20 N |
| Spring Force at Working Travel | 0.80 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 2.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|--------------------|----------------------------------|
| Barrel | Bronze, gold plated |
| Spring | Steel, gold plated |
| Plunger | Steel, CuBe, gold plated |
| Receptacle | Bronze, gold plated |
| Wire AWG 30 (Blue) | Copper, silver plated, insulated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 0.75 mm |
| HGW 2372 | 0.76 mm |

TIP STYLE · DIAMETER · PLATING



| D | G | LG | V | V4 |
|----------|----------|---------|---------|---------|
| 0.40C Au | 0.40C Au | 0.32 Au | 0.40 Au | 0.40 Au |



VL2

0.40 Au

ICT-Test Probe 50 mil / 1.27 mm

TIP STYLE · DIAMETER · PLATING



| A | A | B | BST2 | C |
|----------|---------|---------|---------|----------|
| 0.50C Au | 0.90 Au | 0.50 Au | 0.50 Au | 0.90C Au |



| D | F | H | H1 | LG |
|----------|----------|----------|---------|---------|
| 0.50C Au | 0.60C Au | 0.50 Au | 0.50 Au | 0.40 Au |
| | | 0.90C Au | | |



| Q | V | V1 | V4 | VL2 |
|---------|---------|---------|---------|---------|
| 0.50 Au | 0.50 Au | 0.50 Au | 0.50 Au | 0.50 Au |

BENEFIT

Interface pin
Contacting of assembled PCBs

MECHANICAL DATA

| | |
|--------------------------------|--------------------------|
| Center | 1.27 mm / 50 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 6.40 mm |
| Working Travel | 4.30 mm |
| Pre-Loaded Spring Force | 0.30/ 0.40/ 0.50/ 0.60 N |
| Spring Force at Working Travel | 1.00/ 1.50/ 2.00/ 2.80 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 2.0...3.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|--------------------|----------------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, CuBe |
| Receptacle | Bronze, gold plated |
| Wire AWG 30 (Blue) | Copper, silver plated, insulated |




RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|----------------|
| HP 2361.1 (Trolitax) | 0.96...0.98 mm |
| with pressed-in Ring | 1.02 mm |
| HGW 2372 (Glass filled Material) | 0.97...0.99 mm |
| with pressed-in Ring | 1.03 mm |

HOW TO ORDER

1004/E - G - 0.8 N - Au - 0.4 C
1 2 3 4 5 6

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 Tip Material (only for CuBe)

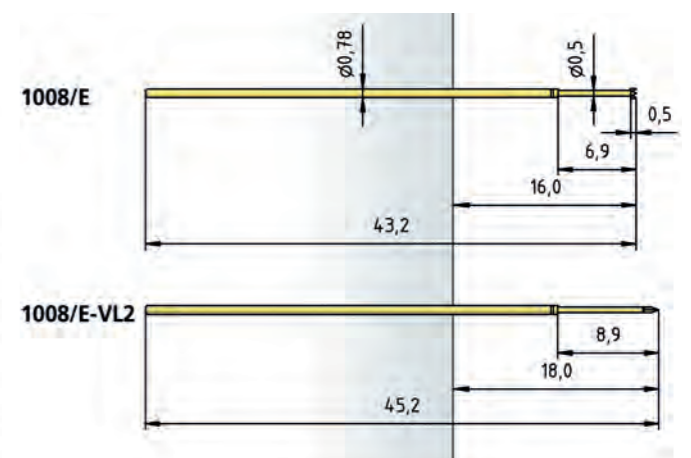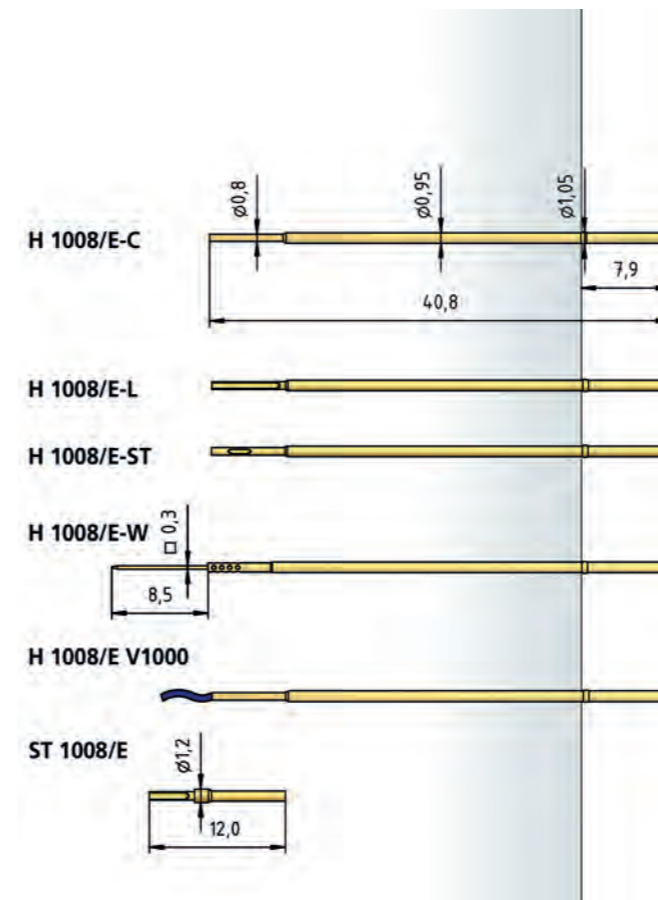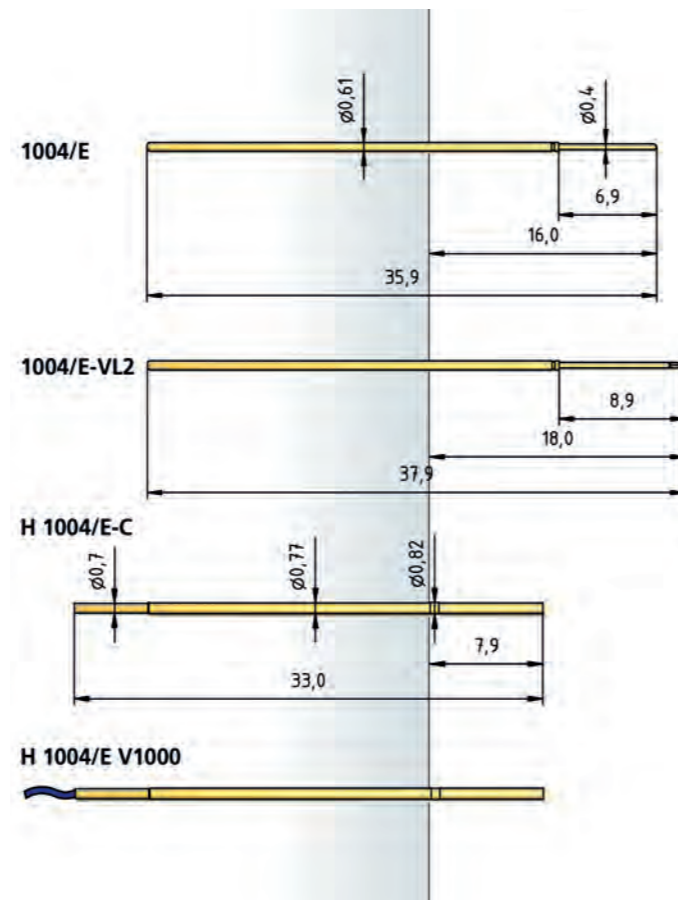

HOW TO ORDER

1008/E - C - 1.5 N - Au - 0.9 C
1 2 3 4 5 6

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 Tip Material (only for CuBe)

Series 1008/E.50

ICT-Test Probe 50 mil / 1.27 mm - Long Travel

BENEFIT

Interface pin
Contacting of assembled PCBs
Spring travel 10 mm

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Center | 1.27 mm / 50 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 10.00 mm |
| Working Travel | 8.00 mm |
| Pre-Loaded Spring Force | 0.25/ 0.30 N |
| Spring Force at Working Travel | 1.00/ 1.50 N |

ELECTRICAL DATA


| | |
|-------------------------------|-------------|
| Max. Current Rating | 2.0...3.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|--------------------|----------------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, gold plated |
| Receptacle | Bronze, gold plated |
| Wire AWG 30 (Blue) | Copper, silver plated, insulated |


RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|----------------|
| HP 2361.1 (Trolitax) | 0.96...0.98 mm |
| with pressed-in Ring | 1.02 mm |
| HGW 2372 (Glass filled Material) | 0.97...0.99 mm |
| with pressed-in Ring | 1.03 mm |

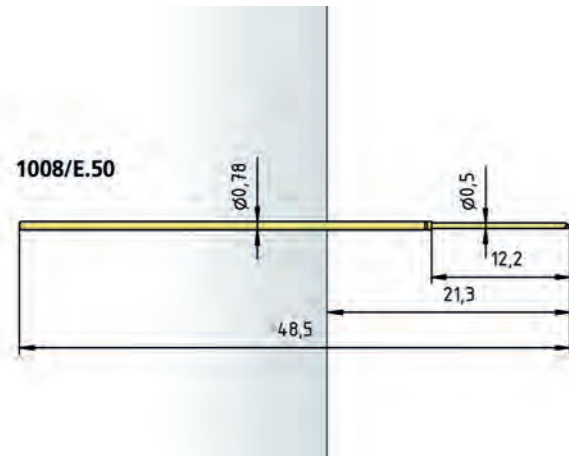

TIP STYLE · DIAMETER · PLATING

| | | |
|---------|---------|---------|
| | | |
| H | Q | V |
| 0.50 Au | 0.50 Au | 0.50 Au |

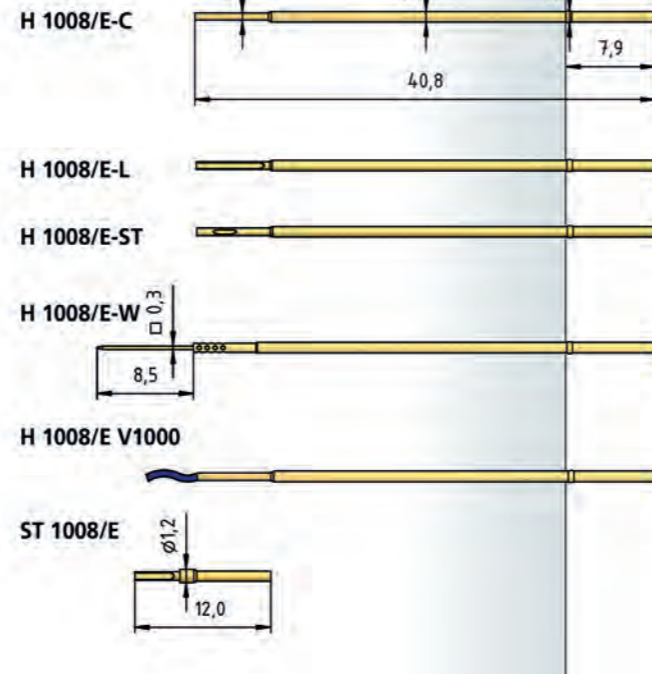

HOW TO ORDER


1008/E .50 - H - 1.5 N - Au - 0.5

1 Series 2 Variant 3 Tip Style 4 Spring Force 5 Tip Plating 6 Tip Diameter

ICT-Test Probe 75 mil / 1.91 mm

TIP STYLE · DIAMETER · PLATING

| | | | | |
|----------|--------------------|-------------------------------|----------|--------------------|
| | | | | |
| A | A6 | B | BD | BST1 |
| 1.20C Au | 1.20 Au | 0.64 Au | 0.61C Au | 0.64 Au |
| | | | | |
| BST2 | C | CS1 | D | D |
| 0.64 Au | 1.00 Au 1.20 Au | 0.80/1.30C Au/POM | 0.50C Au | 0.64C Au |
| | | | | |
| D3 | F | G | H | H |
| 0.50C Au | 0.90C Au | 1.15 Au | 0.64 Au | 1.00 Au 1.20 Au |
| | | | | |
| H1 | K | M1 | M6 | N |
| 0.64 Au | 1.20 Au | 1.20 Au | 1.30 Au | 0.50 Au |
| | | | | |
| Q | Q | Q | Q6F | Q8 |
| 0.50 Au | 0.64 Au | 0.80 Au 1.00 Au 1.15 Au | 0.64C Au | 1.20 Au |
| | | | | |
| V | V1 | V1 | V5 | VL2 |
| 0.64 Au | 0.64 Au | 0.80 Au | 0.64 Au | 0.64 Au |

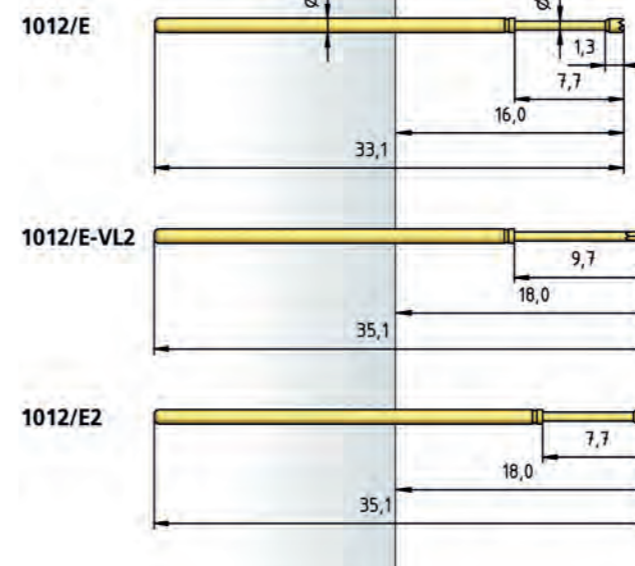

BENEFIT

International standard for 75 mil applications
Contacting of assembled PCBs
Large selection of head styles

MECHANICAL DATA

| | |
|--------------------------------|--------------------------|
| Center | 1.91 mm / 75 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 6.40 mm |
| Working Travel | 4.30 mm |
| Pre-Loaded Spring Force | 0.30/ 0.40/ 0.50/ 0.70 N |
| Spring Force at Working Travel | 1.00/ 1.50/ 2.00/ 2.80 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 3.0...4.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, CuBe |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 1.30 mm |
| with pressed-in Ring | 1.36 mm |
| HGW 2372(| 1.32 mm |
| with pressed-in Ring | 1.37 mm |

Receptacles see page 78

HOW TO ORDER

1012/E - C - 1.5 N - Au - 1.0 C

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 Tip Material (only for CuBe)

Series 1013/Z

ICT-Test Probe 75 mil / 1.91 mm - Long Travel

BENEFIT

International standard for 75 mil applications
 Contacting of assembled PCBs
 Spring travel 12.0 mm

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Center | 1.91 mm / 75 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 12.00 mm |
| Working Travel | 9.60 mm |
| Pre-Loaded Spring Force | 0.40/ 0.35 N |
| Spring Force at Working Travel | 1.20/ 1.60 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS


| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.30 mm |
| with pressed-in Ring | 1.36 mm |
| HGW 2372 (Glass filled Material) | 1.32 mm |
| with pressed-in Ring | 1.37 mm |

TIP STYLE · DIAMETER · PLATING

| | | | | |
|----------|----------|----------|----------|----------|
| C | H | Q | Q | V |
| 1.15 Au | 1.15 Au | 0.64 Au | 1.15 Au | 0.64 Au |

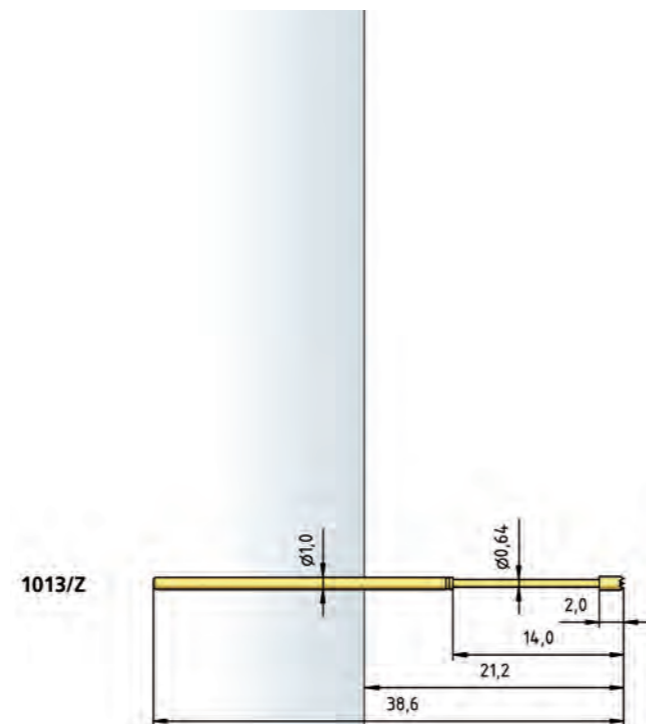

Receptacles see page 78

HOW TO ORDER

1013/Z - C - 1.6 N - Au - 1.15

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

ICT-Test Probe 100 mil / 2.54 mm

TIP STYLE · DIAMETER · PLATING

| | | | | |
|----------------------|---------------------|----------|-----------|-------------|
| A | A6 | B | BD | BST1 |
| 1.50C Au 2.00C Au | 1.50 Au 1.80C Au | 0.90 Au | 0.90 Au | 0.62 Au/Ni |

| | | | | |
|-------------|-------------|---|---------------|-------------------|
| BST2 | BST3 | C | C1 | CS1 |
| 0.90 Au | 1.60C Au | 1.30 Au 1.50C Au 2.00C Au 2.50C Au 3.00C Au | 2.30/3.10C Au | 1.80/2.25C Au/HTK |

| | | | | |
|-------------------|-------------------|---------------------|----------|--------------------|
| CS3 | CS8 | D1 | D | D |
| 1.75/2.40C Au/HTK | 1.80/2.80C Au/HTK | 0.50 Au 0.64C Au | 0.90C Au | 1.30 Au 1.50 Au |

| | | | | |
|----------|----------|----------|-------------------------------|----------|
| E | F | F | G | H |
| 1.50 Au | 0.90 Au | 1.50C Au | 1.06 Au 1.30 Au 1.50 Au | 0.90 Au |

| | | | | |
|-------------------------------|-----------|------------|----------|----------|
| H | H1 | HL2 | K | M |
| 1.50 Au 1.70 Au 2.50 Au | 0.90 Au | 0.90C Au | 1.70 Au | 1.30 Au |

| | | | | |
|-------------------------------|--------------------|----------|--------------------|-------------------------------|
| M1 | M6 | N | Q | Q |
| 1.30 Au 1.40 Au 1.50 Au | 1.30 Au 1.50 Au | 0.50 Au | 0.50 Au 0.80 Au | 1.06 Au 1.30 Au 1.50 Au |

| | | | | |
|-----------|------------|-----------|------------|------------|
| Q5 | Q6F | Q8 | Q8F | QL2 |
| 1.06 Au | 0.64C Au | 1.50 Au | 0.90C Au | 1.50 Au |

| | | | | |
|------------|----------|-----------|------------|-----------|
| V | V | V1 | VL2 | V3 |
| 0.90 Au/Ni | 1.30 Au | 0.90 Au | 0.90 Au | 0.90 Au |

| |
|-----------|
| V5 |
| 0.90 Au |

BENEFIT

International standard for 100 mil applications
 Contacting of assembled PCBs
 Large selection of head styles

MECHANICAL DATA

| | |
|--------------------------------|--|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 6.40 mm |
| Working Travel | 4.30 mm |
| Pre-Loaded Spring Force | 0.20/ 0.25/ 0.40/ 0.60/ 0.50/ 0.80/ 1.40 N |
| Spring Force at Working Travel | 0.60/ 1.00/ 1.50/ 2.00/ 2.25/ 3.00/ 4.00 N |

ELECTRICAL DATA


| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, CuBe |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.65 mm |
| with pressed-in Ring | 1.75 mm |
| HGW 2372 (Glass filled Material) | 1.67 mm |
| with pressed-in Ring | 1.76 mm |

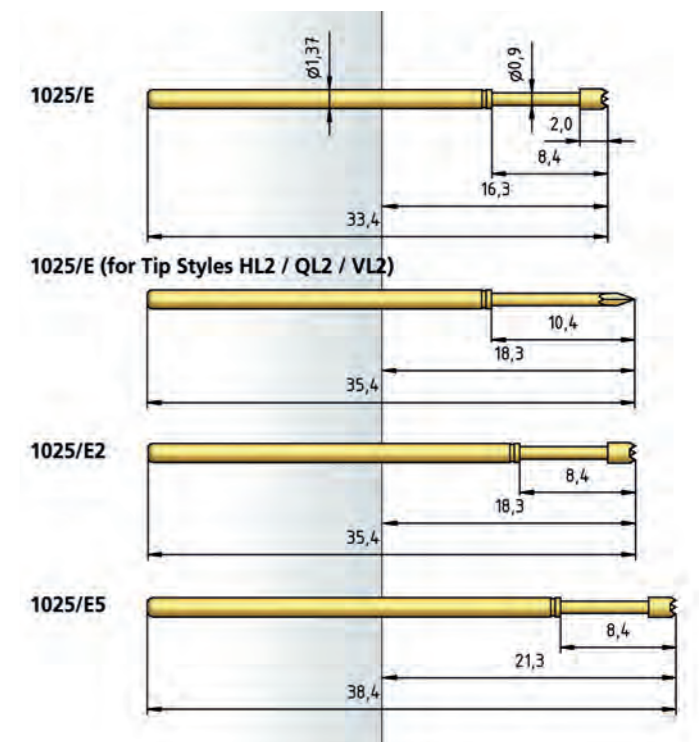

Receptacles see page 79

HOW TO ORDER

1025/E - C - 1.5 N - Au - 1.5 C

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
 6 Tip Material (only for CuBe)

Series 1034

ICT-Test Probe 100 mil / 2.54 mm - Long Travel

BENEFIT

- International standard for 100 mil applications
- Contacting of assembled PCBs
- Large selection of head styles
- Spring travel 10 mm

MECHANICAL DATA

| | |
|--------------------------------|-------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 10.00 mm |
| Working Travel | 8.00 mm |
| Pre-Loaded Spring Force | 0.60/ 0.70 N |
| Spring Force at Working Travel | 1.50/ 2.25 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 25 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.65 mm |
| with pressed-in Ring | 1.75 mm |
| HGW 2372 (Glass filled Material) | 1.67 mm |
| with pressed-in Ring | 1.76 mm |

TIP STYLE · DIAMETER · PLATING

| | | | | |
|------------|------------|--------------------|----------|----------|
| | | | | |
| B | BST | C | G | H |
| 0.75 Au/Ni | 0.62 Ni | 1.50 Au | 1.50 Au | 1.50 Au |
| | | | | |
| M1 | Q | Q | V | |
| 1.40 Au | 1.00 Au/Rh | 1.30 Au 1.50 Au | 0.75 Ni | |

ICT-Test Probe 100 mil / 2.54 mm - Long Travel

Series 1034/E

BENEFIT

- International standard for 100 mil applications
- Contacting of assembled PCBs
- Large selection of head styles
- Spring travel 10 mm

MECHANICAL DATA

| | |
|--------------------------------|--------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 10.00 mm |
| Working Travel | 8.00 mm |
| Pre-Loaded Spring Force | 0.40/ 0.40/ 0.50 N |
| Spring Force at Working Travel | 1.50/ 2.25/ 3.00 N |

ELECTRICAL DATA



| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, CuBe, gold plated |
| Receptacle | Bronze, gold plated |

TIP STYLE · DIAMETER · PLATING

| | | | | |
|--------------------|-----------|--------------|--------------------|--------------------|
| | | | | |
| A | B | BSTL2 | C | G |
| 1.30 Au | 0.90 Au | 0.50 Au | 1.30 Au 1.50 Au | 1.30 Au 1.50 Au |
| | | | | |
| H | K | M1 | Q | Q |
| 1.50 Au 2.50 Au | 1.70 Au | 1.30 Au | 0.50 Au 1.00 Au | 1.30 Au 1.50 Au |
| | | | | |
| V | V1 | | | |
| 0.90 Au | 0.90 Au | | | |

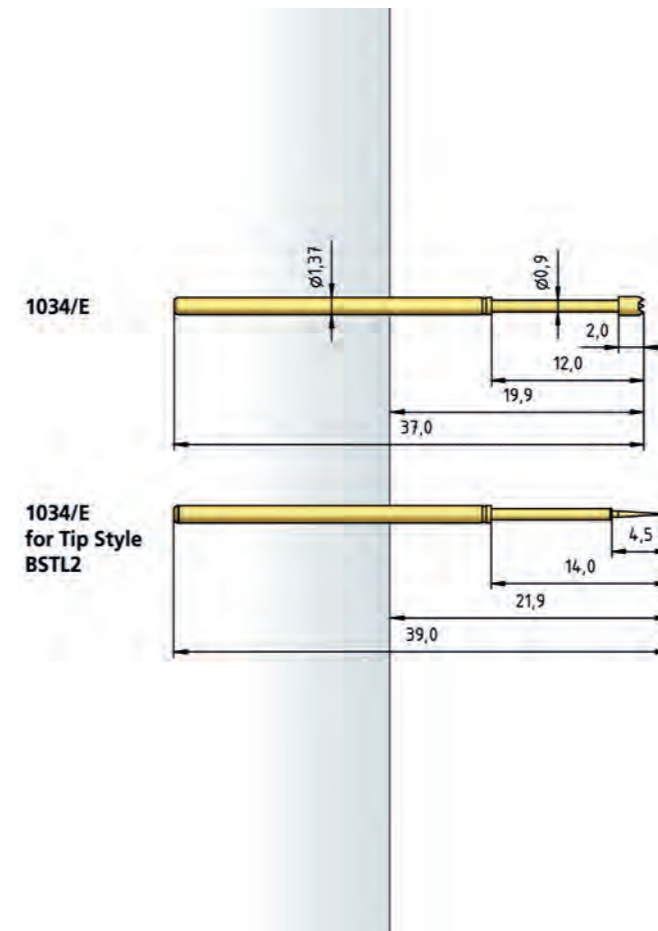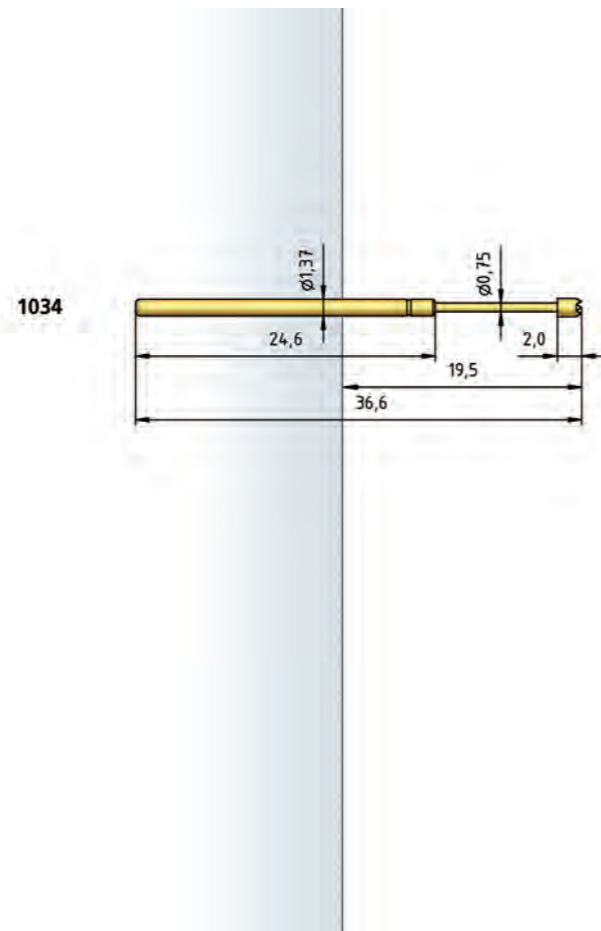

Receptacles see page 79

Receptacles see page 79

HOW TO ORDER

1034 - C - 2.25 N - Au - 1.5

1 2 3 4 5

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

HOW TO ORDER

1034/E - C - 1.5 N - Au - 1.5

1 2 3 4 5

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

Series 1036

ICT-Test Probe 100 mil / 2.54 mm - Long Travel

BENEFIT

- International standard for 100 mil applications
- Contacting of assembled PCBs
- Large selection of head styles
- Spring travel 12.0 mm

MECHANICAL DATA

| | |
|--------------------------------|-------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 12.00 mm |
| Working Travel | 9.60 mm |
| Pre-Loaded Spring Force | 0.30/ 0.40 N |
| Spring Force at Working Travel | 1.50/ 2.25 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 25 mOhm |










MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.65 mm |
| with pressed-in Ring | 1.75 mm |
| HGW 2372 (Glass filled Material) | 1.67 mm |
| with pressed-in Ring | 1.76 mm |

TIP STYLE · DIAMETER · PLATING

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| B | BST | C | G | H |
| 0.75 Au/Ni | 0.62 Ni | 1.50 Au | 1.50 Au | 1.50 Au |
|  |  |  |  | |
| M1 | Q | Q | V | |
| 1.40 Au | 1.00 Au/Rh | 1.30 Au 1.50 Au | 0.75 Ni | |

ICT-Test Probe 100 mil / 2.54 mm - Long Travel

Series 1036/E

BENEFIT

- International standard for 100 mil applications
- Contacting of assembled PCBs
- Large selection of head styles
- Spring travel 11.70 mm

MECHANICAL DATA

| | |
|--------------------------------|--------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 11.70 mm |
| Working Travel | 9.30 mm |
| Pre-Loaded Spring Force | 0.30/ 0.40/ 0.50 N |
| Spring Force at Working Travel | 1.50/ 2.00/ 3.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 25 mOhm |














MATERIALS



| | |
|------------|----------------------------|
| Barrel | Nickel Silver, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.65 mm |
| with pressed-in Ring | 1.75 mm |
| HGW 2372 (Glass filled Material) | 1.67 mm |
| with pressed-in Ring | 1.76 mm |

TIP STYLE · DIAMETER · PLATING

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| A | B | C | D | F |
| 1.30 Au | 0.90 Au | 1.30 Au 1.50 Au | 0.90 Au | 0.90 Au |
|  |  |  |  |  |
| G | H | K | M1 | Q |
| 1.50 Au | 1.50 Au | 1.50 Au | 1.30 Au | 0.50 Au |
|  |  |  | | |
| Q | V | V1 | | |
| 1.30 Au 1.50 Au | 0.90 Au | 0.90 Au | | |

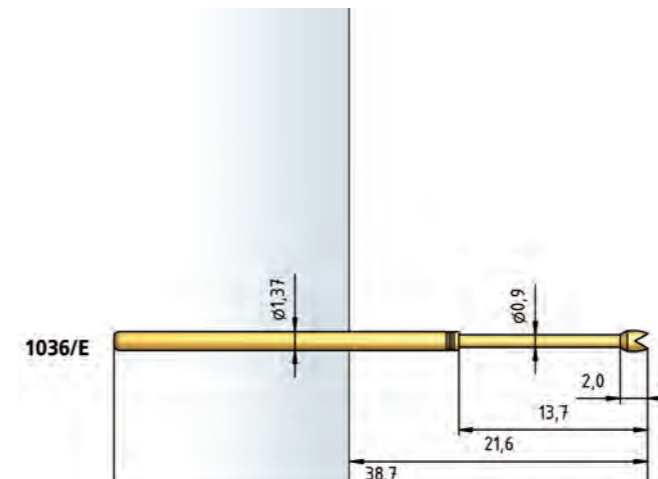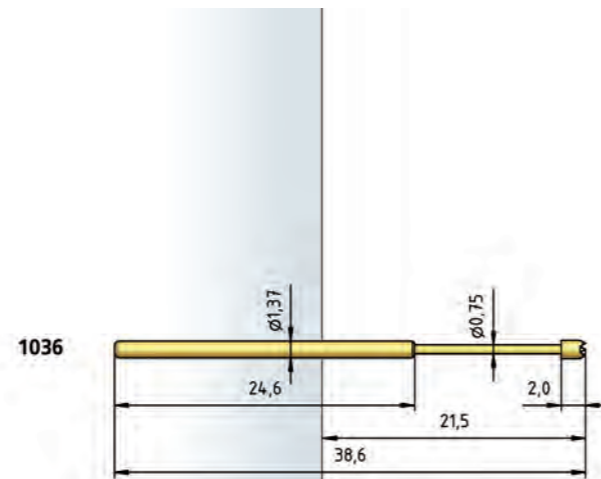

Receptacles see page 79

HOW TO ORDER

$\frac{1036}{1} - \frac{C}{2} - \frac{2.25\text{ N}}{3} - \frac{\text{Au}}{4} - \frac{1.5}{5}$

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

Receptacles see page 79

HOW TO ORDER

$\frac{1036/E}{1} - \frac{B}{2} - \frac{2.0\text{ N}}{3} - \frac{\text{Au}}{4} - \frac{0.9}{5}$

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

Series 2021 • 1021

ICT-Test Probe 100 mil / 2.54 mm

BENEFIT

- Metric design
- Contacting of assembled PCBs
- Large selection of head styles
- Variable installation heights from various collar dimensions

MECHANICAL DATA

| | |
|--------------------------------|---|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.30 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 0.30/ 0.40/ 0.50/ 0.70/ 1.00/ 1.00 N |
| Spring Force at Working Travel | 0.70/ 1.00/ 1.50/ 2.25/ 3.00/ 5.00 N 2021/5 - 1.00 N not available |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 25 mOhm |

MATERIALS

| | |
|------------|--|
| Barrel | Bronze/Brass, gold plated |
| Spring | Spring Steel, Stainless Steel, gold plated |
| Plunger | Steel, Plastic |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 1.99 mm |
| HGW 2372 | 2.00 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|-------------------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.50/ 0.70/ 1.00/ 1.00 N |
| Spring Force at Working Travel | 1.50/ 2.25/ 3.00/ 5.00 N |
| (Order Index E) | 2021/5 - 1.00 N not available |

TABLE COLLAR HEIGHT FOR TEST PROBE 1021/X

| Series | X (mm) | Y (mm) | Z (mm) |
|--------|--------|--------|--------|
| 1021 | 4.0 | 12.5 | 34.3 |
| 1021 | 6.0 | 14.5 | 36.3 |
| 1021 | 7.0 | 15.5 | 37.3 |
| 1021 | 8.0 | 16.5 | 38.3 |
| 1021 | 9.0 | 17.5 | 39.3 |
| 1021 | 10.0 | 18.5 | 40.3 |

Receptacles see page 75
Distance rings see page 75

HOW TO ORDER

2021/ 5 - F - 1.5 N E - Au - 2.0

1 Series 2 Collar Height 3 Tip Style 4 Spring Force 5 High Temperature
6 Tip Plating 7 Tip Diameter

TIP STYLE · DIAMETER · PLATING



| A | A6 | B | BST | C |
|---------------|---------------------|--|------------|--|
| 2.00 Au/Ni/Rh | 1.80 Au 2.00C Au | 0.65 Ni 0.80 Au/ Ni/Rh 1.00 Au/Ni | 0.80 Au/Ni | 1.30 Au/Ni/Rh 1.50 Au 1.80 Au/Ni/Rh 2.00 Au/Ni 2.30 Rh 2.50 Ni 3.00 Rh |




| C15 | C55 | D | D | D1 |
|----------------------|----------------------|----------------------------------|---|------------|
| 1.20/2.00 Au/ HTK | 1.40/2.50 Au/ HTK | 0.65 Au/Ni 0.80 Au 1.00 Au | 1.30 Au/Ni 1.40 Au 1.80 Ni 2.00 Au | 0.65 Au/Ni |



| F | F | F1 | F4 | G |
|-----------------------|----------------------------------|---------|---------|----------------------------------|
| 0.80 Au 1.00 Au/Ni | 1.50 Au 1.80 Au 2.00 Au/Ni | 0.65 Ni | 0.80 Au | 1.30 Ni 1.80 Au/Rh 2.00 Au |



| H | K | M | Q |
|--------------------|-------------------------------|---------|-----------------------|
| 1.80 Rh 2.00 Rh | 1.15 Ni 1.75 Ni 2.00 Rh | 1.80 Rh | 1.00 Ni 1.30 Au/Ni |

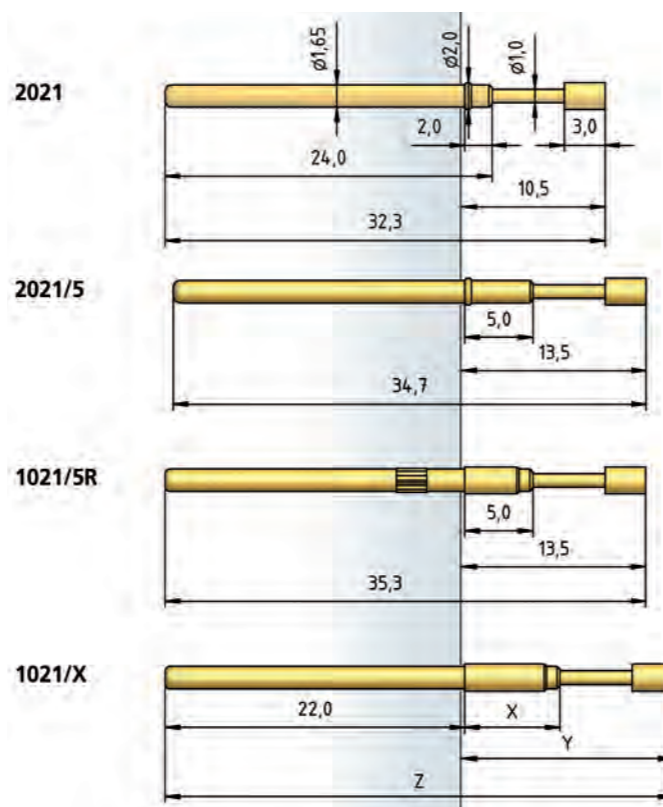

ICT-Test Probe 100 mil / 2.54 mm

TIP STYLE · DIAMETER · PLATING



| A | B | BST | C | D |
|--------------------|---------|---------|--------------------|---------|
| 1.80 Au 2.00 Au | 1.00 Ni | 0.80 Au | 1.30 Rh 2.00 Ni | 1.00 Ni |




| D | F | G | G | H |
|---------|---------|---------|--------------------|---------|
| 1.30 Ni | 2.00 Au | 1.00 Ni | 1.30 Ni 2.00 Ni | 1.30 Rh |



| K | M | M1 | Q | Q8 |
|---------|---------|---------|---------|---------|
| 2.00 Ni | 1.50 Au | 2.00 Rh | 1.30 Ni | 1.80 Au |



| V | V |
|---------|---------|
| 1.00 Ni | 1.00 Ni |

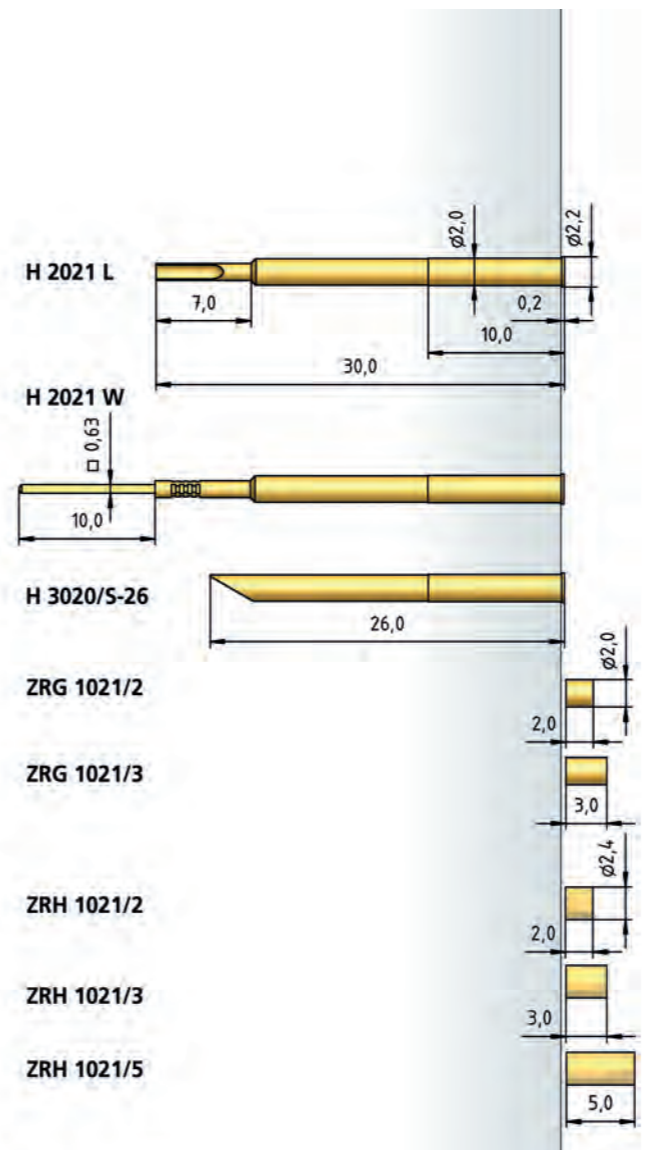

BENEFIT

- Metric design
- Contacting of assembled PCBs
- Large selection of head styles
- Variable installation heights from various collar dimensions

MECHANICAL DATA

| | |
|--------------------------------|--------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 10.00 mm |
| Working Travel | 8.00 mm |
| Pre-Loaded Spring Force | 0.40/ 0.50/ 1.00 N |
| Spring Force at Working Travel | 1.50/ 2.50/ 3.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS


| | |
|------------|---------------------------|
| Barrel | Bronze/Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 1.99 mm |
| HGW 2372 | 2.00 mm |

TABLE COLLAR HEIGHT FOR TEST PROBES 1024/X AND 2024/X

| Series | X (mm) | Y (mm) | Z (mm) |
|--------|--------|--------|--------|
| 2024 | 5.0 | 18.2 | 39.5 |
| 1024 | 7.0 | 20.2 | 42.0 |
| 2024 | 8.0 | 21.2 | 42.5 |
| 1024 | 10.0 | 23.2 | 45.0 |

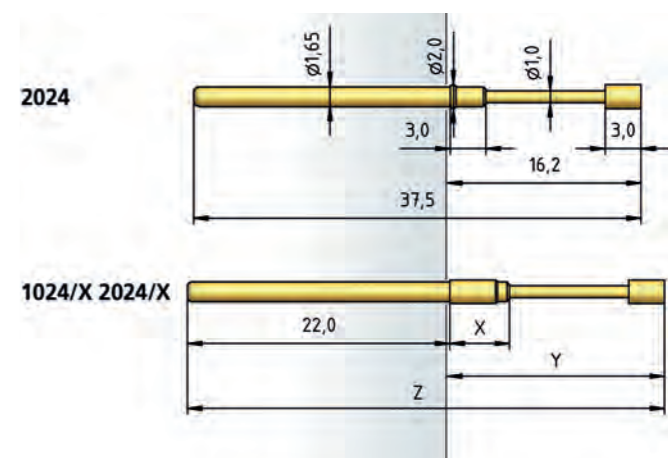

HOW TO ORDER

2024/ 5 - G - 1.5 N - Ni - 1.3

1 Series 2 Collar Height 3 Tip Style 4 Spring Force 5 Tip Plating
6 Tip Diameter

Series 2028 • 1028

ICT-Test Probe 100 mil / 2.54 mm

ICT-Test Probe 100 mil / 2.54 mm

Series 2029

BENEFIT

- Metric design
- Contacting of assembled PCBs
- Large selection of head styles

MECHANICAL DATA

| | |
|--------------------------------|---|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.30 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 0.30/ 0.40/ 0.50/ 0.70/ 1.00/ 1.00 N |
| Spring Force at Working Travel | 0.70/ 1.00/ 1.50/ 2.25/ 3.00/ 5.00 N 2028/5 - 1.00 N not available |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 25 mOhm |

MATERIALS


| | |
|------------|--|
| Barrel | Bronze/Brass, gold plated |
| Spring | Spring Steel, Stainless Steel, gold plated |
| Plunger | Steel, Plastic |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 1.99 mm |
| HGW 2372 | 2.00 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|--------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.50/ 0.50/ 0.80 N |
| Spring Force at Working Travel | 1.50/ 2.25/ 3.00 N |
| Travel (Order Index E) | |

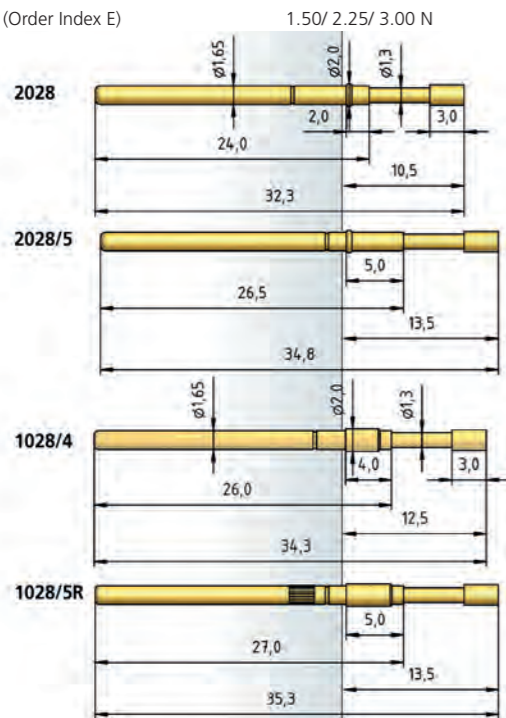

HOW TO ORDER

2028 - A - 1.5 N E - Au - 1.5
1 2 3 4 5 6

1 Series 2 Tip Style 3 Spring Force 4 High Temperature 5 Tip Plating 6 Tip Diameter

TIP STYLE · DIAMETER · PLATING




| A | B | BST | C | CSM |
|--------------------|---------|------------|--|----------------------|
| 1.50 Au 1.80 Ni | 1.30 Rh | 0.80 Au/Ni | 1.40 Au 1.80 Rh 2.50 Rh 3.50 Rh | 1.00/2.00 Au/ HTK |




| D | D1 | EB | F | G |
|--------------------|--------------------|---------|---------|--------------------|
| 1.40 Au 2.00 Au | 0.65 Ni 0.80 Ni | 1.80 Au | 1.30 Ni | 1.30 Ni 1.50 Rh |



| H | H | K | M6 | Q |
|---------|--------------------|--------------------|---------|---------|
| 1.30 Au | 1.40 Au 1.80 Au | 1.30 Au 1.75 Ni | 2.00 Rh | 1.30 Au |



| Q | Q5 | Q8 | V |
|--------------------|---------|---------|---------|
| 1.80 Au 2.00 Au | 1.30 Ni | 2.30 Ni | 1.30 Ni |

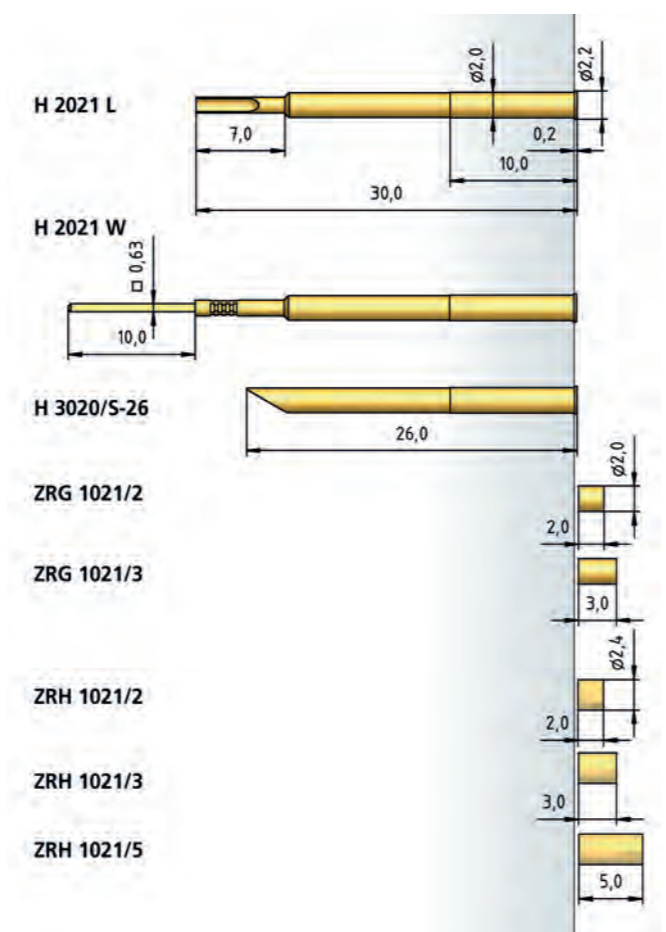

TIP STYLE · DIAMETER · PLATING




| A | B | BST | C | C |
|---------|---------|---------|----------------------------------|-----------------|
| 1.50 Ni | 1.30 Rh | 0.80 Au | 1.30 Ni 1.50 Au/Rh 2.00 Au | 1.30/1.60 Ni/Rh |



| D | EB | G | G | H |
|---------|---------|--------------------------|-----------------|-------------------------------|
| 1.50 Au | 1.80 Au | 1.30 Au/Ni/Rh 1.50 Ni | 1.30/1.60 Ni/Rh | 1.30 Au 1.50 Ni 1.80 Au |



| K | M1 | Q | Q5 | V |
|---------|---------|--------------------|------------|---------|
| 1.80 Au | 1.50 Au | 1.50 Ni 2.00 Au | 1.30 Au/Ni | 1.30 Ni |

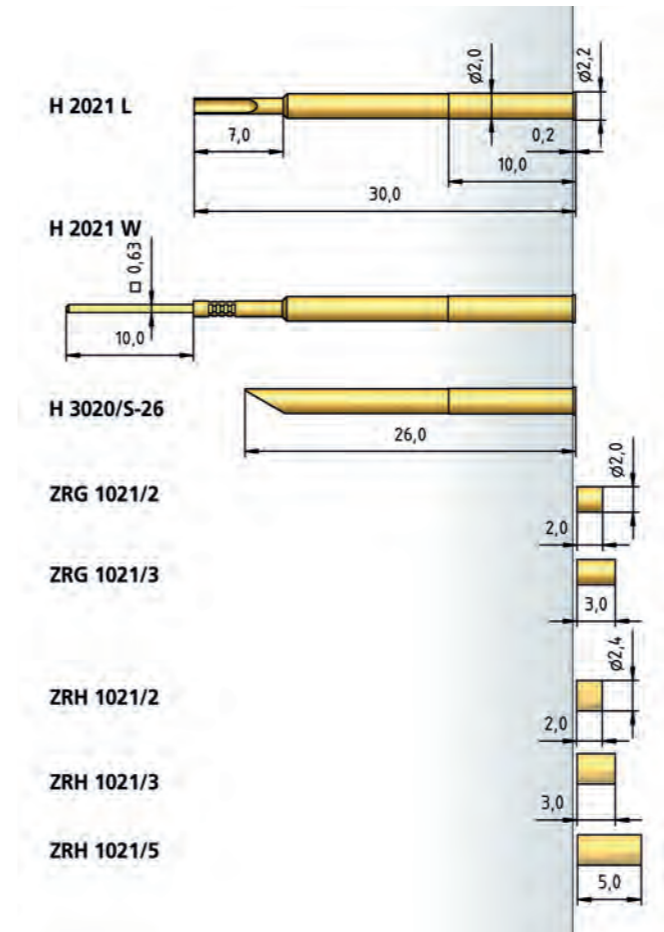

BENEFIT

- Metric design
- Contacting of assembled PCBs
- Large selection of head styles

MECHANICAL DATA

| | |
|--------------------------------|--------------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 8.00 mm |
| Working Travel | 6.40 mm |
| Pre-Loaded Spring Force | 0.35/ 0.70/ 0.80/ 0.80 N |
| Spring Force at Working Travel | 1.50/ 2.25/ 3.00/ 5.00 N |

ELECTRICAL DATA


| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 1.99 mm |
| HGW 2372 | 2.00 mm |

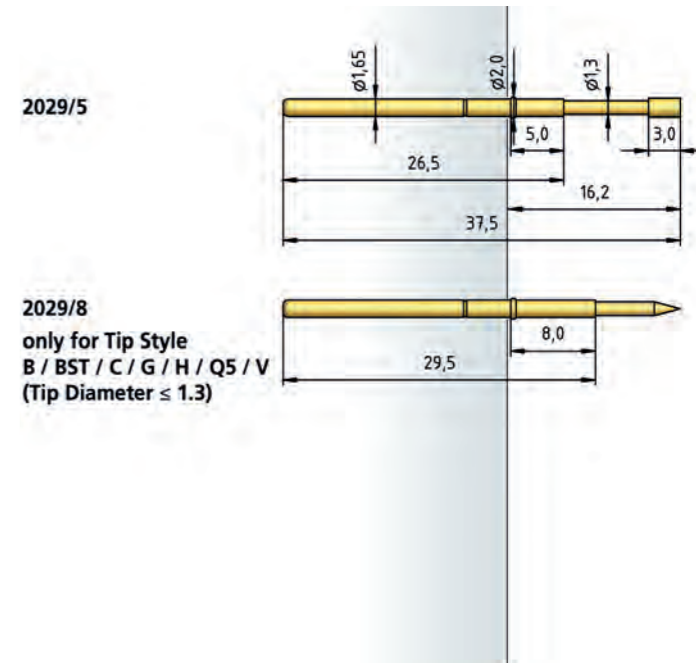

HOW TO ORDER

2029/ 5 - C - 1.5 N - Rh - 1.5
1 2 3 4 5 6

1 Series 2 Collar Height 3 Tip Style 4 Spring Force 5 Tip Plating 6 Tip Diameter

Receptacles 1012


Receptacles for Series
1012/E · 1012/D · 1013/Z

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.30 mm |
| with pressed-in Ring | 1.36 mm |
| HGW 2372 (Glass filled Material) | 1.32 mm |
| with pressed-in Ring | 1.37 mm |

MATERIALS

| | |
|------------|---------------------|
| Receptacle | Bronze, gold plated |
|------------|---------------------|

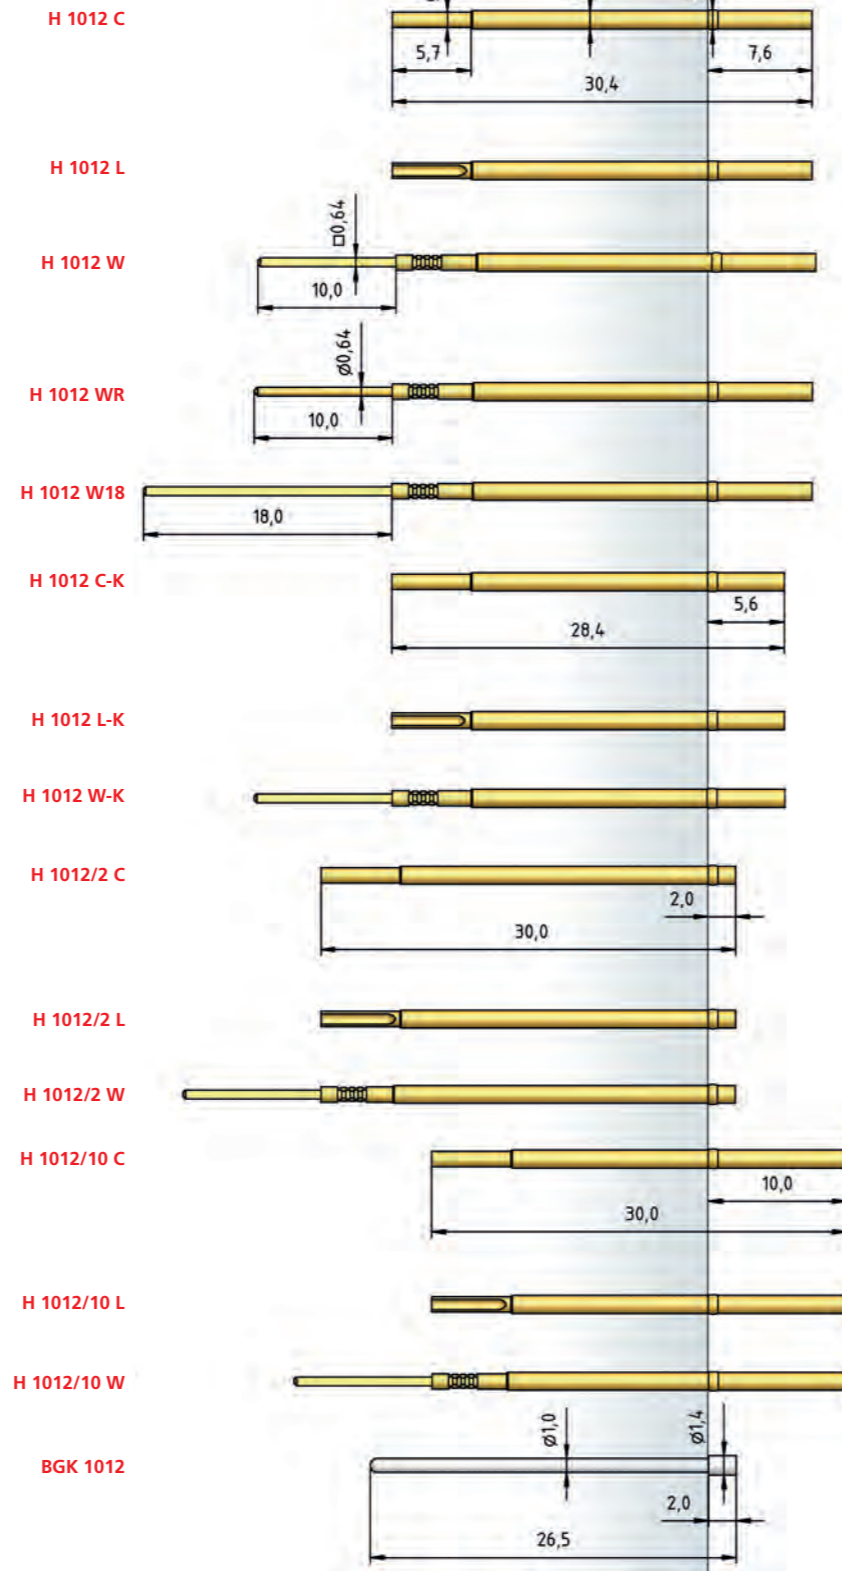


Receptacles for Series
1025/E · 1025/D · 1034 · 1034/E · 1036 · 1036/E

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.65 mm |
| with pressed-in Ring | 1.75 mm |
| HGW 2372 (Glass filled Material) | 1.67 mm |
| with pressed-in Ring | 1.76 mm |

MATERIALS

| | |
|------------|---------------------|
| Receptacle | Bronze, gold plated |
|------------|---------------------|

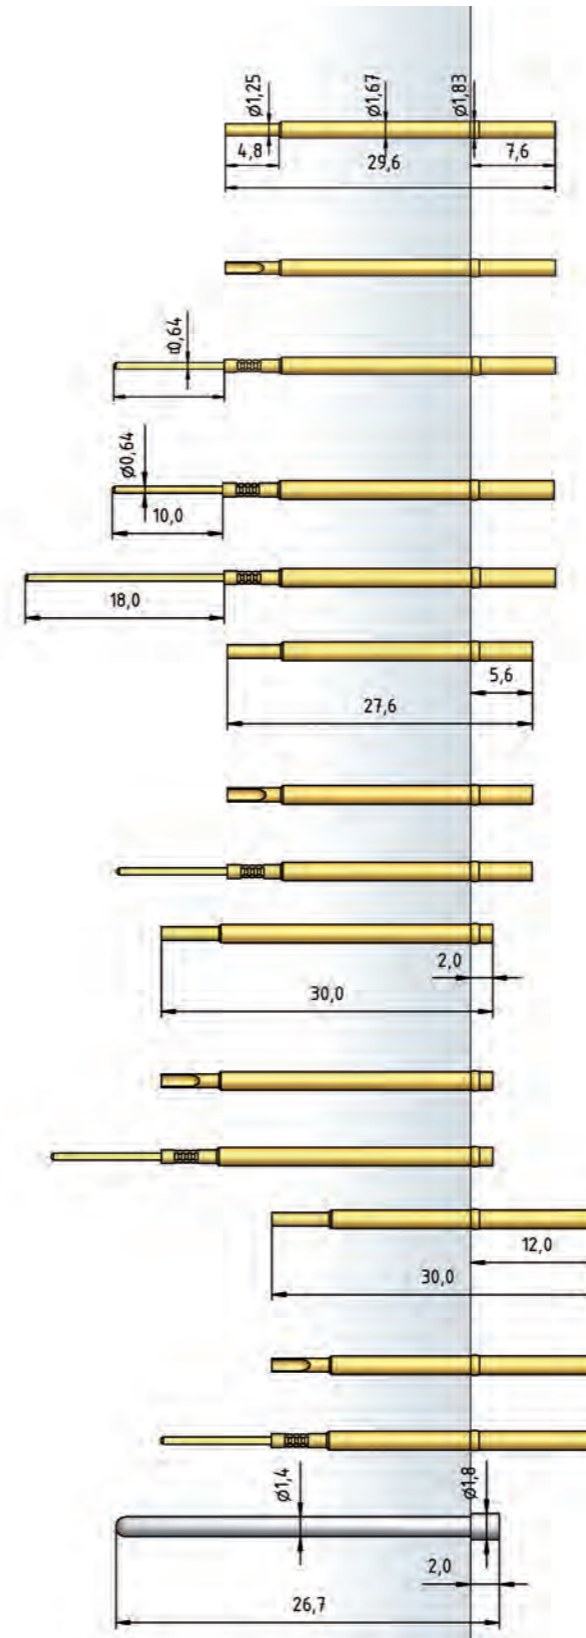

HPL TEST PROBES

To ensure reliable contacting of PCBs which are contaminated with residues and or oxidised from the soldering process, a wide range of ICT Test Probes is available from PTR (see page 62).

We are amending our product range with our new HPL (High Pre-Loaded Test Probes), which offer better penetration of contaminants and enable better signal transfer even in Lead-Free applications. A comparison of the spring forces (standard and HPL) is shown in fig. 1.

This HPL-Series will not increase stresses on the UUT/Test Fixture and the same probe travel is maintained as with the standard series.

PTR's HPL Test Probes offer special advantages when used as test contacts for lead-free PCBs. Despite the lack of solder on the test points, the new test probes provide secure contacting and satisfy all the test requirements in this sector.

| SERIES | CENTER | PAGE |
|--------------|-------------------|------|
| 1008/E (HPL) | 50 mil / 1.27 mm | 82 |
| 1012/E (HPL) | 75 mil / 1.91 mm | 83 |
| 1025/E (HPL) | 100 mil / 2.54 mm | 84 |

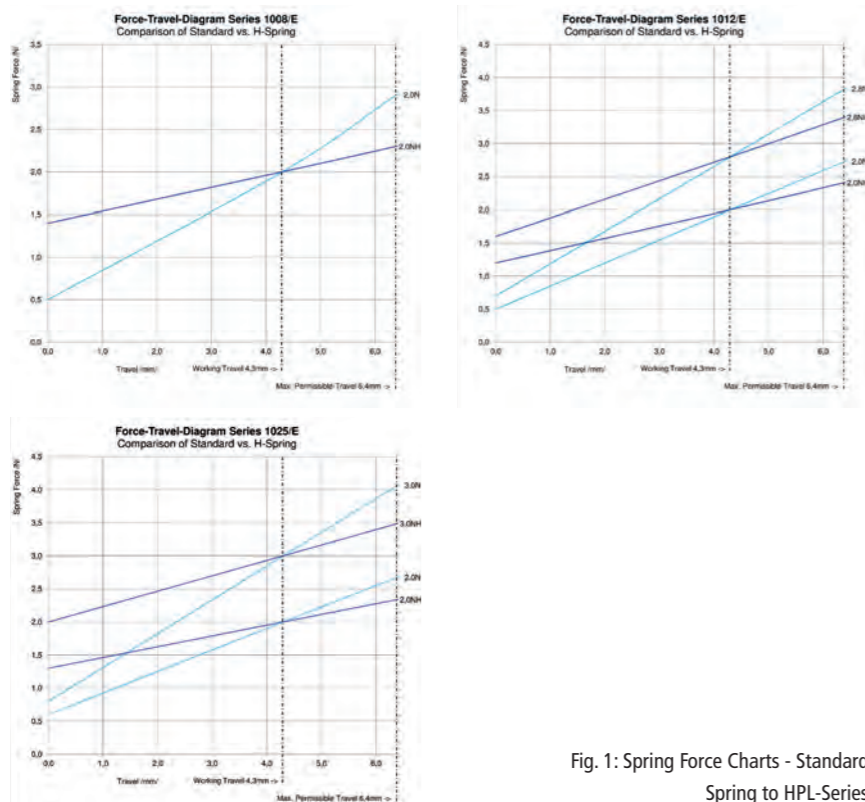


Fig. 1: Spring Force Charts - Standard Spring to HPL-Series



Series 1008/E

HPL-Test Probe with High Pre-Loaded Spring Force 50 mil / 1.27mm

BENEFIT

- Contacting of assembled, unleaded PCBs
- High initial pressure
- Large penetration depth

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Center | 1.27 mm / 50 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 6.40 mm |
| Working Travel | 4.30 mm |
| Pre-Loaded Spring Force | 1.40 N |
| Spring Force at Working Travel | 2.00 N |

ELECTRICAL DATA


| | |
|-------------------------------|-------------|
| Max. Current Rating | 2.0...3.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|--------------------|----------------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, CuBe |
| Receptacle | Bronze, gold plated |
| Wire AWG 30 (Blue) | Copper, silver plated, insulated |


RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|----------------|
| HP 2361.1 (Trolitax) | 0.96...0.98 mm |
| with pressed-in Ring | 1.02 mm |
| HGW 2372 (Glass filled Material) | 0.97...0.99 mm |
| with pressed-in Ring | 1.03 mm |

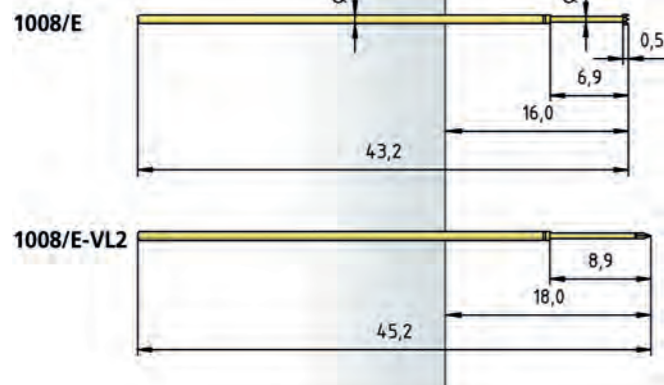

TIP STYLE · DIAMETER · PLATING

| | | | | |
|----------|----------|---------------------|-------------|------------|
| | | | | |
| A | A | B | BST2 | D |
| 0.50C Au | 0.90 Au | 0.50 Au | 0.50 Au | 0.50C Au |
| | | | | |
| C | F | H | H1 | LG |
| 0.90C Au | 0.60C Au | 0.50 Au 0.90C Au | 0.50 Au | 0.40 Au |
| | | | | |
| Q | V | V1 | V4 | VL2 |
| 0.50 Au | 0.50 Au | 0.50 Au | 0.50 Au | 0.50 Au |

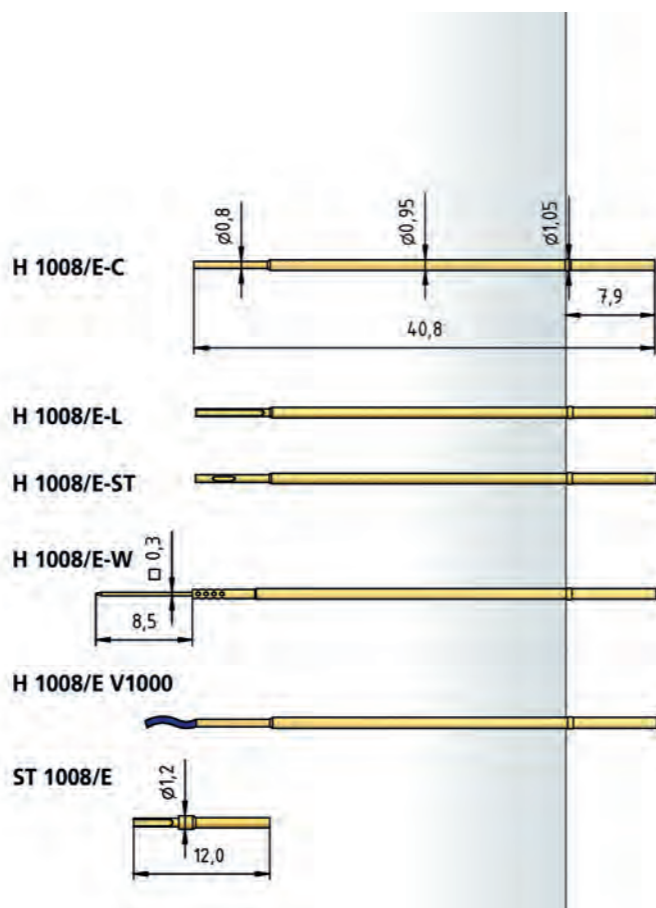

HOW TO ORDER

1008/E - F - 2.0 N - H - Au - 0.6 C

1 2 3 4 5 6 7


1 Series 2 Tip Style 3 Spring Force 4 High pre-loaded Spring Force
5 Tip Plating 6 Tip Diameter 7 Tip Material (only for CuBe)

HPL-Test Probe with High Pre-Loaded Spring Force 75 mil / 1.91mm

Series 1012/E

TIP STYLE · DIAMETER · PLATING

| | | | | |
|--------------------|--------------------|-------------------------------|------------|--------------------|
| | | | | |
| A | A6 | B | BD | BST1 |
| 1.20C Au | 1.20 Au | 0.64 Au | 0.61C Au | 0.64 Au |
| | | | | |
| BST2 | C | CS1 | D | D |
| 0.64 Au | 1.00 Au 1.20 Au | 0.80/1.30C Au/POM | 0.50C Au | 0.64C Au |
| | | | | |
| D3 | F | G | H | H |
| 0.50C Au | 0.90C Au | 1.15 Au | 0.64 Au | 1.00 Au 1.20 Au |
| | | | | |
| H1 | K | M1 | M6 | N |
| 0.64 Au | 1.20 Au | 1.20 Au | 1.30 Au | 0.50 Au |
| | | | | |
| Q | Q | Q | Q6F | Q8 |
| 0.50 Au 1.00 Au | 0.64 Au | 0.80 Au 1.00 Au 1.15 Au | 0.64C Au | 1.20 Au |
| | | | | |
| V | V1 | V1 | V5 | VL2 |
| 0.64 Au | 0.64 Au | 0.80 Au | 0.64 Au | 0.64 Au |

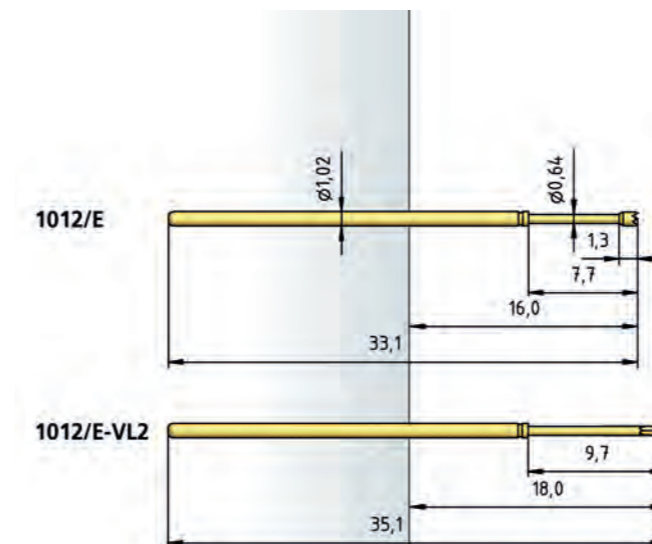

BENEFIT

- Contacting of assembled, unleaded PCBs
- High initial pressure
- Large penetration depth

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Center | 1.91 mm / 75 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 6.40 mm |
| Working Travel | 4.30 mm |
| Pre-Loaded Spring Force | 1.20/ 1.60 N |
| Spring Force at Working Travel | 2.00/ 2.80 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 3.0...4.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, CuBe |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.30 mm |
| with pressed-in Ring | 1.36 mm |
| HGW 2372 (Glass filled Material) | 1.32 mm |
| with pressed-in Ring | 1.37 mm |

Receptacles see page 78

HOW TO ORDER

1012/E - F - 2.8 N - H - Au - 0.9 C

1 2 3 4 5 6 7

1 Series 2 Tip Style 3 Spring Force 4 High pre-loaded Spring Force
5 Tip Plating 6 Tip Diameter 7 Tip Material (only for CuBe)

Series 1025/E

HPL-Test Probe with High Pre-Loaded Spring Force 100 mil / 2.54mm

BENEFIT

- Contacting of assembled, unleaded PCBs
- High initial pressure
- Large penetration depth

MECHANICAL DATA

| | |
|--------------------------------|-------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 6.40 mm |
| Working Travel | 4.30 mm |
| Pre-Loaded Spring Force | 1.30/ 2.00 N |
| Spring Force at Working Travel | 2.00/ 3.00 N |

ELECTRICAL DATA


| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, CuBe |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.65 mm |
| with pressed-in Ring | 1.75 mm |
| HGW 2372 (Glass filled Material) | 1.67 mm |
| with pressed-in Ring | 1.76 mm |

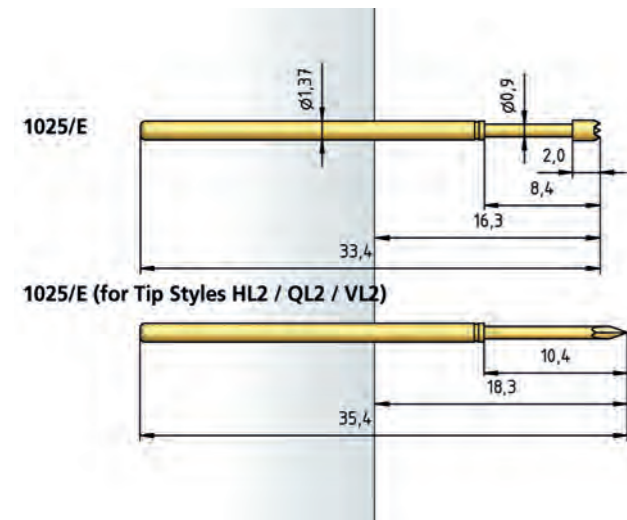

Receptacles see page 79

HOW TO ORDER

1025/E - HL2 - 3.0 N - H - Au - 0.9 C
 1 2 3 4 5 6 7

1 Series 2 Tip Style 3 Spring Force 4 High pre-loaded Spring Force
 5 Tip Plating 6 Tip Diameter 7 Tip Material (only for CuBe)

TIP STYLE · DIAMETER · PLATING

| | | | | |
|----------------------|---------------------|----------|-----------|-------------|
| | | | | |
| A | A6 | B | BD | BST1 |
| 1.50C Au 2.00C Au | 1.50 Au 1.80C Au | 0.90 Au | 0.90 Au | 0.62 Au/Ni |

| | | | | |
|-------------|-------------|---|---------------|-------------------|
| | | | | |
| BST2 | BST3 | C | C1 | CS1 |
| 0.90 Au | 1.60C Au | 1.30 Au 1.50C Au 2.00C Au 2.50C Au 3.00C Au | 2.30/3.10C Au | 1.80/2.25C Au/HTK |

| | | | | |
|-------------------|-------------------|---------------------|----------|--------------------|
| | | | | |
| CS3 | CS8 | D1 | D | D |
| 1.75/2.40C Au/HTK | 1.80/2.80C Au/HTK | 0.50 Au 0.64C Au | 0.90C Au | 1.30 Au 1.50 Au |

| | | | | |
|----------|----------|----------|-------------------------------|----------|
| | | | | |
| E | F | F | G | H |
| 1.50 Au | 0.90 Au | 1.50C Au | 1.06 Au 1.30 Au 1.50 Au | 0.90 Au |

| | | | | |
|-------------------------------|-----------|------------|----------|----------|
| | | | | |
| H | H1 | HL2 | K | M |
| 1.50 Au 1.70 Au 2.50 Au | 0.90 Au | 0.90C Au | 1.70 Au | 1.30 Au |

| | | | | |
|-----------------------|----------------|----------|----------------|-----------------------|
| | | | | |
| M1 | M6 | N | Q | Q |
| 1.30 Au1.40 Au1.50 Au | 1.30 Au1.50 Au | 0.50 Au | 0.50 Au0.80 Au | 1.06 Au1.30 Au1.50 Au |

| | | | | |
|-----------|------------|-----------|------------|------------|
| | | | | |
| Q5 | Q6F | Q8 | Q8F | QL2 |
| 1.06 Au | 0.64C Au | 1.50 Au | 0.90C Au | 1.50 Au |

| | | | | |
|------------|----------|-----------|------------|-----------|
| | | | | |
| V | V | V1 | VL2 | V3 |
| 0.90 Au/Ni | 1.30 Au | 0.90 Au | 0.90 Au | 0.90 Au |

V5
0.90 Au

ROTATING TEST PROBES

Rotating Test Probes offer an alternative for the testing of assembled components under unclean conditions.



When the plunger is pressed downwards, its special spiral design causes a rotation, limited to approx. 90°.

This principle allows perfect contacting even when the contact surfaces are dirty or oxidised. In combination with the rotating motion, the tip styles – which are normally aggressive – also allow the use of probes with lower contact pressures.

| SERIES | CENTER | PAGE |
|--------|-------------------|------|
| 1008/D | 50 mil / 1.27 mm | 88 |
| 1012/D | 75 mil / 1.91 mm | 89 |
| 1025/D | 100 mil / 2.54 mm | 90 |



Series 1008/D

ICT Rotating Test Probe 50 mil / 1.27 mm

ICT Rotating Test Probe 75 mil / 1.91 mm

Series 1012/D

BENEFIT

Use in cases of bad soiling, oxydation or flux residues
Penetration of these platings by rotating movement

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Center | 1.27 mm / 50 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 6.40 mm |
| Working Travel | 4.30 mm |
| Pre-Loaded Spring Force | 1.00 N |
| Spring Force at Working Travel | 1.50 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 2.0...3.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, gold plated |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|----------------|
| HP 2361.1 (Trolitax) | 0.96...0.98 mm |
| with pressed-in Ring | 1.02 mm |
| HGW 2372 (Glass filled Material) | 0.97...0.99 mm |
| with pressed-in Ring | 1.03 mm |

TIP STYLE · DIAMETER · PLATING



HD
0.90 Au

TIP STYLE · DIAMETER · PLATING



KD
1.20 Au

BENEFIT

Use in cases of bad soiling, oxydation or flux residues
Penetration of these platings by rotating movement

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Center | 1.91 mm / 75 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 6.40 mm |
| Working Travel | 4.30 mm |
| Pre-Loaded Spring Force | 0.50 N |
| Spring Force at Working Travel | 2.00 N |

ELECTRICAL DATA



| | |
|-------------------------------|-------------|
| Max. Current Rating | 3.0...4.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, gold plated |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.30 mm |
| with pressed-in Ring | 1.36 mm |
| HGW 2372 (Glass filled Material) | 1.32 mm |
| with pressed-in Ring | 1.37 mm |

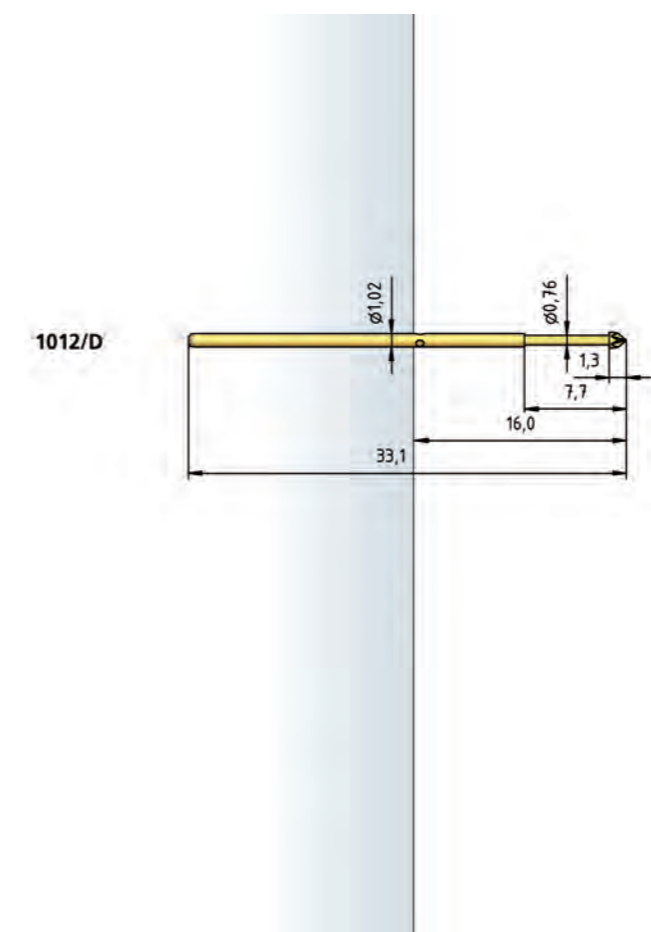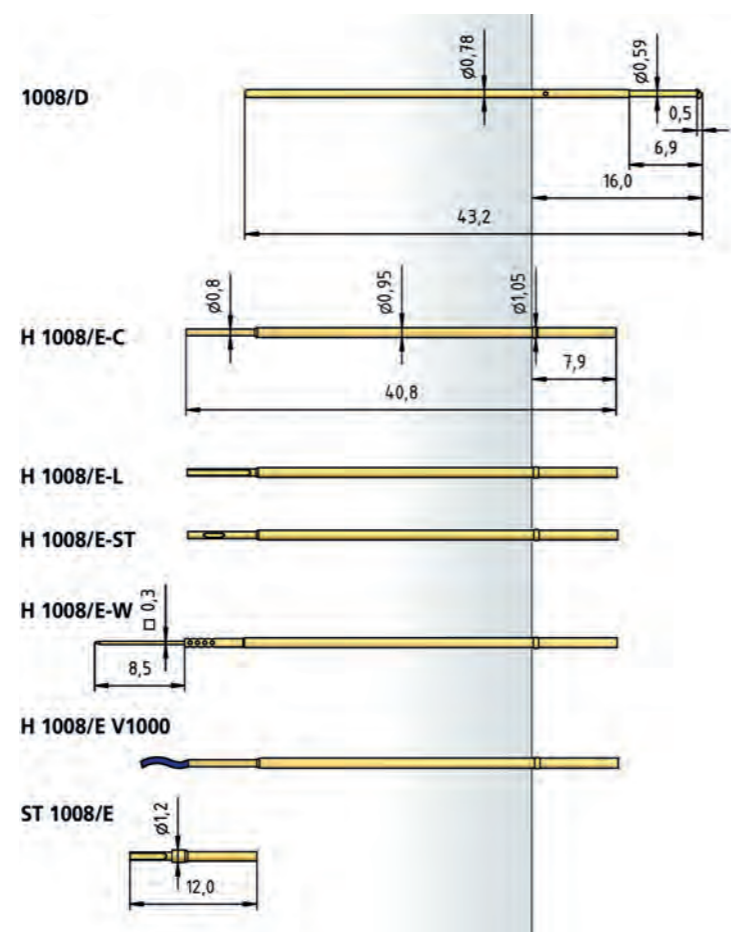

HOW TO ORDER

1008/D - HD - 1.5 N - Au - 0.9

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

Receptacles see page 78

HOW TO ORDER

1012/D - KD - 2.0 N - Au - 1.2

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

Series 1025/D

ICT Rotating Test Probe 100 mil / 2.54 mm

BENEFIT

Use in cases of bad soiling, oxydation or flux residues
Penetration of these platings by rotating movement

MECHANICAL DATA

| | |
|--------------------------------|-------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 6.40 mm |
| Working Travel | 4.30 mm |
| Pre-Loaded Spring Force | 0.60 N |
| Spring Force at Working Travel | 2.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, gold plated |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.65 mm |
| with pressed-in Ring | 1.75 mm |
| HGW 2372 (Glass filled Material) | 1.67 mm |
| with pressed-in Ring | 1.76 mm |


TIP STYLE · DIAMETER · PLATING



KD

1.50 Au

1025/D

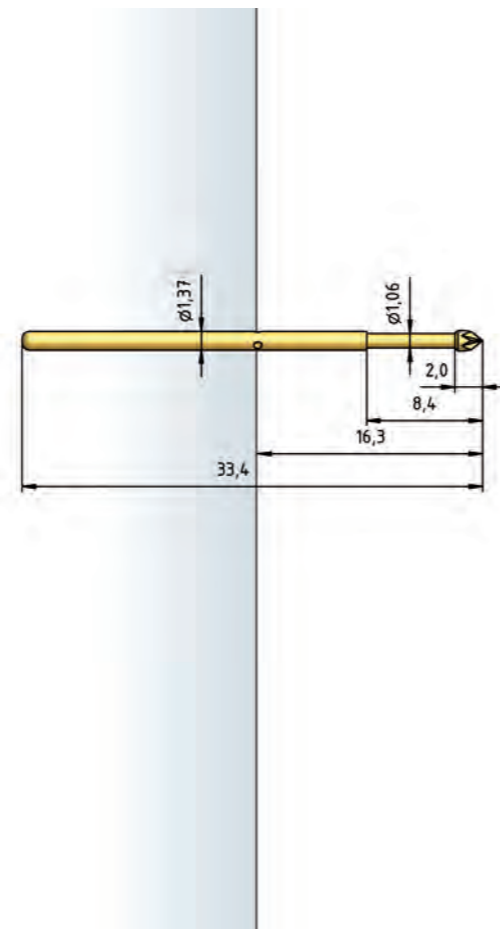

Receptacles see page 79

HOW TO ORDER

1025/D - KD - 2.0 N - Au - 1.5

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter

FLYING PROBES

The Flying Probe testers are designed as a thread variant and are suitable for use in Acculogic (Scorpion) and Digitaltest test systems. A special locking system and extremely high precision of the single components ensure very high test point accuracy.

| SERIES | CENTER | PAGE |
|--------|-------------------|------|
| 5248/G | 100 mil / 2.54 mm | 94 |
| 5257/G | 100 mil / 2.54 mm | 95 |



Series 5248/G

Flying Probe 100 mil / 2.54 mm

BENEFIT

Use in Acculogic flying probe testers (Scorpion) and digital test
High test point accuracy
With thread

MECHANICAL DATA • 5248/G

| | |
|--------------------------------|-------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 8.00 mm |
| Working Travel | 6.40 mm |
| Pre-Loaded Spring Force | 0.50 N |
| Spring Force at Working Travel | 1.75 N |

MECHANICAL DATA • 5248/G-V

| | |
|--------------------------------|-------------------|
| Center | 2.54 mm / 100 mil |
| Full Travel | 6.50 mm |
| Working Travel | 5.00 mm |
| Pre-Loaded Spring Force | 0.50 N |
| Spring Force at Working Travel | 1.50 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|------------------------------|
| Barrel | Brass, gold plated |
| Spring | Stainless Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |






RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 2.00 mm |
| HGW 2372 | 2.03 mm |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 5248/G-2.54-2.0 | 2.0 |

TIP STYLE · DIAMETER · PLATING

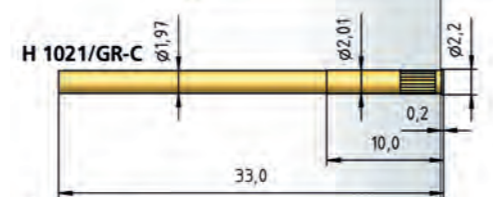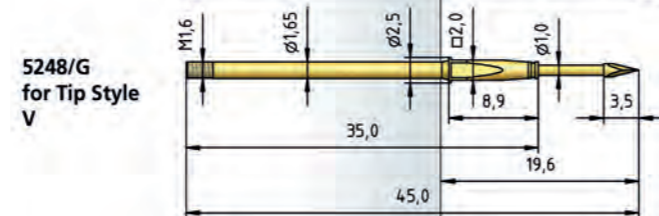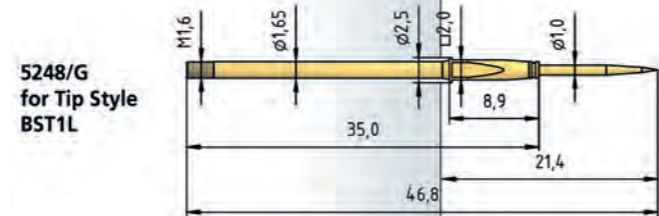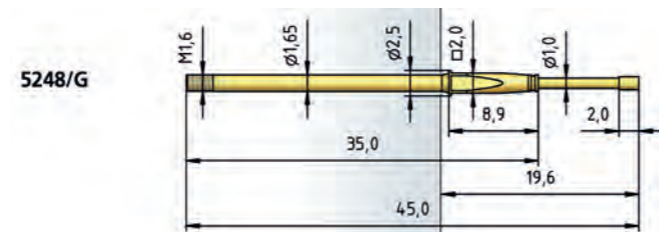

This receptacle is sealed vacuum-tight when a wire is soldered on.
Important:
If too much solder is used there is a risk that it will get into the tread.







HOW TO ORDER

5248/ G - A - 1.75 N - Au - 1.3

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 Tip Plating 6 Tip Diameter

Flying Probe 100 mil / 2.54 mm

TIP STYLE · DIAMETER · PLATING

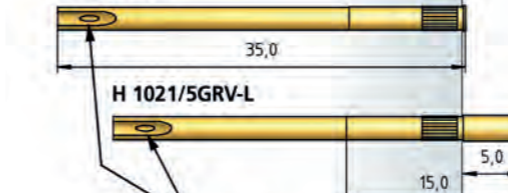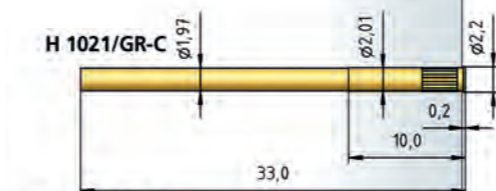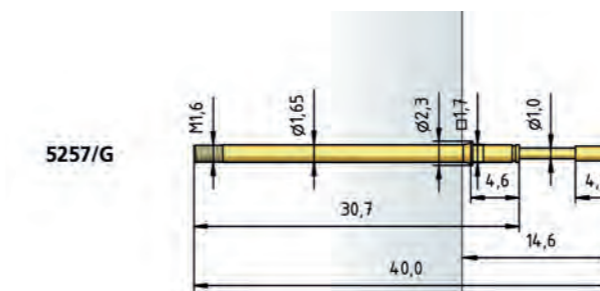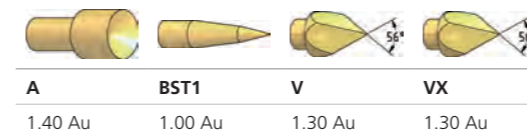

This receptacle is sealed vacuum-tight when a wire is soldered on.
Important:
If too much solder is used there is a risk that it will get into the tread.

BENEFIT

Use in Acculogic flying probe testers (Scorpion) and digital test
High test point accuracy
With thread

MECHANICAL DATA

| | |
|--------------------------------|-------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.30 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 0.60 N |
| Spring Force at Working Travel | 1.75 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|------------------------------|
| Barrel | Brass, gold plated |
| Spring | Stainless Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 2.00 mm |
| HGW 2372 | 2.03 mm |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|--------------------------|------------|
| WFS 1021/G-2.54-1.8 | 1.8 |
| WFS 1021/G-2.54-2.0 | 2.0 |
| WFS 1021/G-3.5-3.0-Z | 3.0 |
| WFS 1021/G-C2S-3.0-2.5-Z | 2.5 |

HOW TO ORDER

5257/ G - A - 1.75 N - Au - 1.4

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 Tip Plating 6 Tip Diameter

TEST PROBES WITH THREAD

Test Probes with Thread are mainly used in the automotive supply industry to test cable harnesses.

The thread on the test probe and receptacle prevents the test probe from gradually twisting out of the receptacle, something which is aided by the spontaneous opening of the test module. Different sizes with centers from 1.27 to 4.0 mm with different tip styles and contact pressures provide a basis for almost all connectors which need testing. A constantly increasing range of Test Probes for position tests completes this range of products.

A large selection of screwing tools and torque screwdrivers makes it easy to use these Test Probes with Thread (see page 216). Test conditions and connectors change very quickly in this sector, so both the market and our customers demand new types of test probes with increasing frequency. Thanks to the use of the most up-to-date control technology in our in-house lathe center, we are able to satisfy these demands. We can manufacture test probes and create special solutions to meet our customers' individual needs promptly and with a high level of precision.



Position Test / Push-back Check

Test Probes for the position test check the correct position of contacting elements in connectors (passive push-back test). In contrast to this, during the active push-back test a high defined force is applied to the contacting elements by means of a push-back test probe. This provides a mechanical check on the locking of the contacting elements in the connector and, in the case of an error, evaluates an electrical interruption. The tips are matched to the relevant connector geometry. PTR offers a wide range of different shapes and dimensions.



Checking for Bent Pins

In order to recognise bent plug pins, special tips are fitted with insulating caps which prevent electrical contact with the tip and generate an error message. The dimensions and shape of the insulation cap and tip plunger are designed to match the geometry of the relevant connector.

| SERIES | CENTER | PAGE |
|---------------------------|-------------------|------|
| 1007/G | 50 mil / 1.27 mm | 98 |
| 1010/G | 75 mil / 1.91 mm | 99 |
| 1012/G | 75 mil / 1.91 mm | 100 |
| 1015/G | 100 mil / 2.54 mm | 101 |
| 1015/G for Position Test | 100 mil / 2.54 mm | 102 |
| 1021/G | 100 mil / 2.54 mm | 103 |
| 1021/G for Position Test | 100 mil / 2.54 mm | 104 |
| 1021/GT for Position Test | 100 mil / 2.54 mm | 105 |
| 1028/G | 100 mil / 2.54 mm | 106 |
| 5310/G | 100 mil / 2.54 mm | 107 |
| 1060/G | 160 mil / 4.00 mm | 108 |
| 1060/G for Position Test | 160 mil / 4.00 mm | 109 |
| 1060/GT for Position Test | 160 mil / 4.00 mm | 110 |
| 1061/G | 160 mil / 4.00 mm | 111 |
| 5110/G | 160 mil / 4.00 mm | 112 |
| 1042/G | 177 mil / 4.50 mm | 113 |
| Receptacles 1021/G | | 114 |
| Receptacles 1060/G | | 115 |



Series 1007/G

Test Probe with Thread 50 mil / 1.27 mm

BENEFIT

Test probe for cable harness testing
Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle

Short center

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Center | 1.27 mm / 50 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 0.20 N |
| Spring Force at Working Travel | 1.10 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |

MATERIALS


| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe, gold plated |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 0.99 mm |
| HGW 2372 (Glass filled material) | 1.00 mm |

AVAILABLE SCREW TOOLS


| Article Designation | max. Tip-∅ | max. Plate-∅ |
|-------------------------|------------|--------------|
| WFS 1007/G-1.27-1.0 (A) | 1.0 | 1.0 |

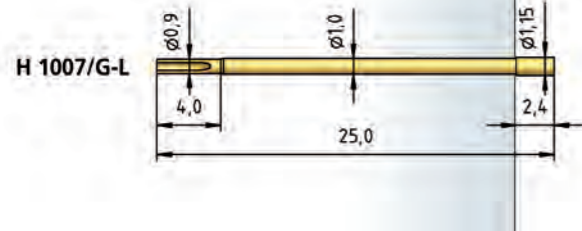


TIP STYLE · DIAMETER · PLATING




F
0.64C Au




D7001
0.60C Au



D7002
0.60C Au



D7003
0.50C Au

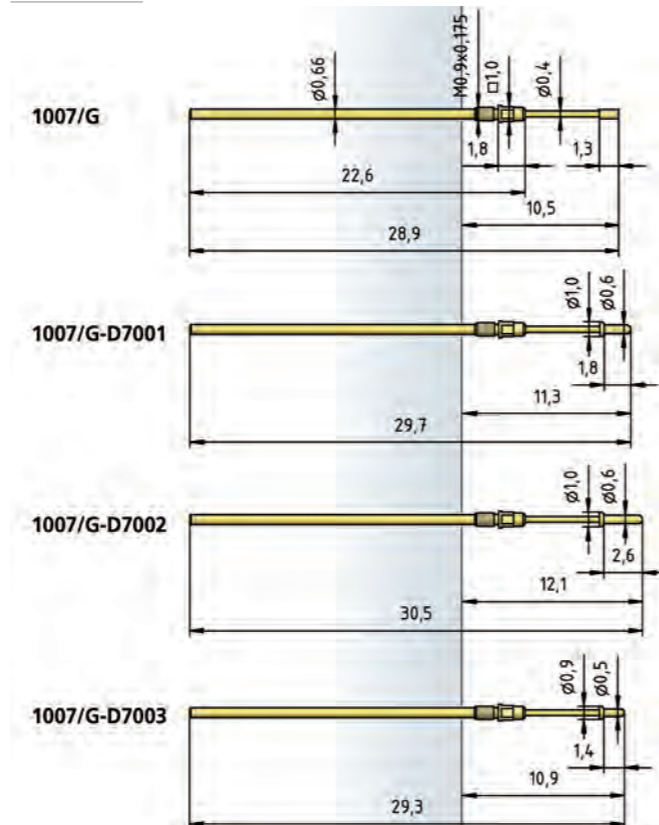

HOW TO ORDER


1007/ G - B - 1.1 N - Au - 0.4 C
1 2 3 4 5 6 7

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 Tip Plating
6 Tip Diameter 7 Tip Material (only for CuBe)

Test Probe with Thread 75 mil / 1.91 mm

Series 1010/G

TIP STYLE · DIAMETER · PLATING

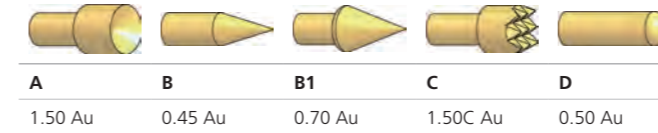

D 0.65 Au
DF 1.00 Au
D2 0.40 Au
D2 0.60 Au
F 1.00 Au
1.50 Au/Ni



G 1.50 Rh
H 1.50C Ni

BENEFIT

Test probe for cable harness testing
Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle

Short design

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Center | 1.91 mm / 75 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 3.00 mm |
| Working Travel | 2.40 mm |
| Pre-Loaded Spring Force | 0.30/ 0.50 N |
| Spring Force at Working Travel | 1.50/ 2.25 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 3.0...4.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|--|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, Stainless Steel, gold plated |
| Plunger | Steel, CuBe, gold plated |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL



| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.25 mm |
| HGW 2372 (Glass filled material) | 1.26 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|---|------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.20 N |
| Spring Force at Working Travel (Order Index E) | 0.80 N |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|----------------------|------------|
| WFS 1010/G-1.5-1.0 | 1.0 |
| WFS 1010/G-2.3-1.5-Z | 1.5 |

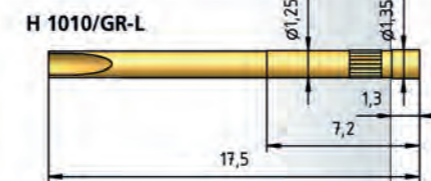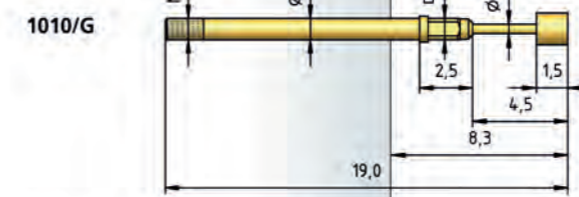

This receptacle is sealed vacuum-tight when a wire is soldered on.
Important: If too much solder is used there is a risk that it will get into the thread.

HOW TO ORDER

1010/ G - C - 0.8 N E - Au - 1.5 C
1 2 3 4 5 6 7 8

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 High Temperature
6 Tip Plating 7 Tip Diameter 8 Tip Material (only for CuBe)

Series 1012/G

Test Probe with Thread 75 mil / 1.91 mm

BENEFIT

Test probe for cable harness testing
Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle

MECHANICAL DATA

| | |
|--------------------------------|--------------------------------|
| Center | 1.91 mm / 75 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 6.40 mm |
| Working Travel | 4.30 mm |
| Pre-Loaded Spring Force | 0.20/ 0.30/ 0.40/ 0.50/ 0.70 N |
| Spring Force at Working Travel | 0.60/ 1.00/ 1.50/ 2.00/ 2.80 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 3.0...4.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, CuBe, gold plated |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.31 mm |
| HGW 2372 (Glass filled material) | 1.33 mm |



AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|----------------------|------------|
| WFS 1012/G-1.5-1.0 | 1.0 |
| WFS 1012/G-1.9-1.5-Z | 1.5 |

TIP STYLE · DIAMETER · PLATING

| | | | | |
|----------|--------------------|-------------------------------|----------|--------------------|
| | | | | |
| A | A6 | B | BD | BST1 |
| 1.20C Au | 1.20 Au | 0.64 Au | 0.61C Au | 0.64 Au |
| | | | | |
| BST2 | C | CS1 | D | D |
| 0.64 Au | 1.00 Au 1.20 Au | 0.80/1.30C Au/POM | 0.50C Au | 0.64C Au |
| | | | | |
| D3 | F | G | H | H |
| 0.50C Au | 0.90C Au | 1.15 Au | 0.64 Au | 1.00 Au 1.20 Au |
| | | | | |
| H1 | K | M1 | M6 | N |
| 0.64 Au | 1.20 Au | 1.20 Au | 1.30 Au | 0.50 Au |
| | | | | |
| Q | Q | Q | Q8 | V |
| 0.50 Au | 0.64 Au | 0.80 Au 1.00 Au 1.15 Au | 1.20 Au | 0.64 Au |

| | | |
|---------|---------|---------|
| | | |
| V1 | V1 | V5 |
| 0.64 Au | 0.80 Au | 0.64 Au |

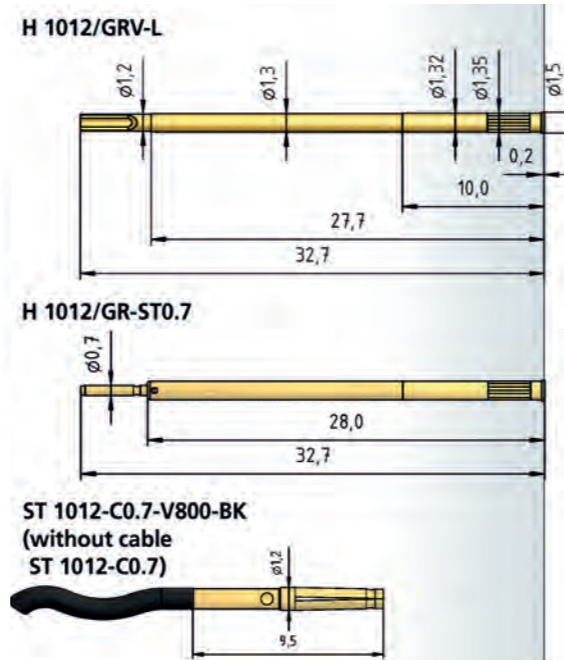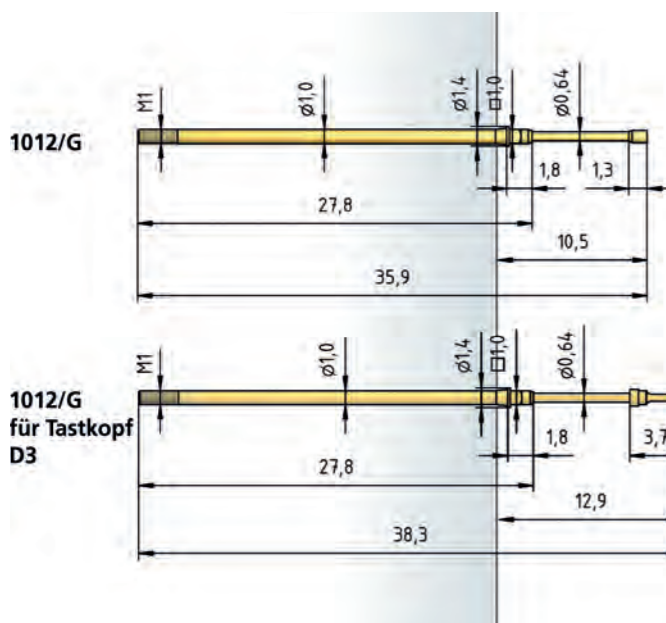

HOW TO ORDER

1012/ G - A - 1.5 N - Au - 1.2 C
1 2 3 4 5 6 7

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 Tip Plating
6 Tip Diameter 7 Tip Material (only for CuBe)

Test Probe with Thread 100 mil / 2.54 mm

Series 1015/G

TIP STYLE · DIAMETER · PLATING

| | | | | |
|-----------------------|----------------------|-------------------|---------------------|---|
| | | | | |
| A | A6 | B | BS | C |
| 1.00 Au 1.80 Au/Ni | 1.80C Au | 0.75 Au/ Ni/Rh | 0.38 Au | 1.00 Au 1.30C Au 1.80C Au/Ni 2.30 Rh |
| | | | | |
| C15 | C25 | C15 | D | D |
| 0.90/1.37 Au/ HTK | 1.20/1.80 Au/ HTK | 1.80 Au | 0.50 Ni | 0.60C Au 0.65C Au/Ni 0.75 Au/Rh |
| | | | | |
| D | E | F | F | G |
| 1.25 Au/Ni | 1.80 Au/Ni | 0.75 Rh | 1.50C Au 1.80 Rh | 1.30 Rh 1.80 Au/Ni |
| | | | | |
| H | K | Q | | |
| 1.30 Rh 1.80 Au | 1.80 Au/Ni | 0.75C Au | | |

BENEFIT

Test probe for cable harness testing
Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle

MECHANICAL DATA

| | |
|--------------------------------|--------------------------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 4.40 mm |
| Working Travel | 3.50 mm |
| Pre-Loaded Spring Force | 0.25/ 0.40/ 0.40/ 0.30/ 0.70/ 0.60 N |
| Spring Force at Working Travel | 0.70/ 1.00/ 1.50/ 1.70/ 2.50/ 3.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 3.0...5.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS



| | |
|------------------------------|-------------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, CuBe, Plastic |
| Receptacle | Brass, gold plated |
| Stranded Wire AWG 20 (Black) | Copper, tin plated, insulated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|----------------|
| HP 2361.1 (Trolitax) | 1.68...1.70 mm |
| HGW 2372 (Glass filled material) | 1.68...1.70 mm |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 1015/G-2.54-1.5 | 1.5 |
| WFS 1015/G-2.54-1.8 | 1.8 |

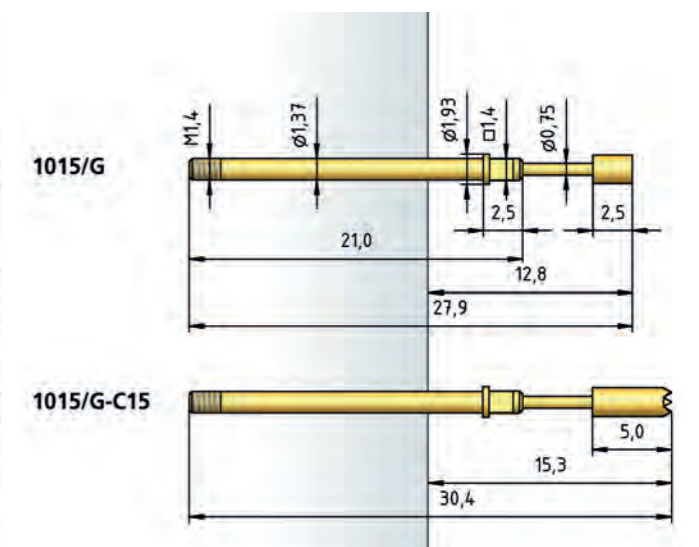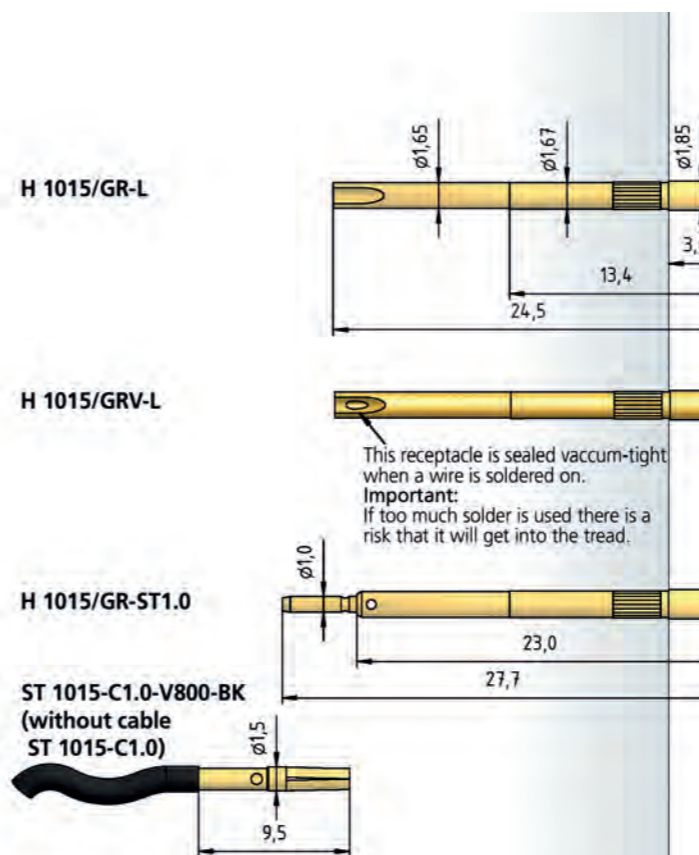

HOW TO ORDER

1015/ G - C - 1.5 N - Au - 1.3 C
1 2 3 4 5 6 7

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 Tip Plating
6 Tip Diameter 7 Tip Material (only for CuBe)

Series 1015/G

Test Probe with Thread 100 mil / 2.54 mm for Position Test

BENEFIT

- Test probe for cable harness testing
- Test probe geometry for position test
- Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle
- Fast wiring system

MECHANICAL DATA

| | |
|--------------------------------|--------------------------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 4.40 mm |
| Working Travel | 3.50 mm |
| Pre-Loaded Spring Force | 0.25/ 0.40/ 0.40/ 0.30/ 0.70/ 0.60 N |
| Spring Force at Working Travel | 0.70/ 1.00/ 1.50/ 1.70/ 2.50/ 3.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS


| | |
|------------------------------|-------------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, gold plated |
| Receptacle | Brass, gold plated |
| Stranded Wire AWG 20 (Black) | Copper, tin plated, insulated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|----------------|
| HP 2361.1 (Trolitax) | 1.68...1.70 mm |
| HGW 2372 (Glass filled material) | 1.68...1.70 mm |


AVAILABLE SCREW TOOLS

| Article Designation | max. Plate-∅ |
|-------------------------|--------------|
| WFS 1015/G-2.54-1.5 (A) | 1.5 |




| Tip Style | Tip-∅ mm A | Plate-∅ mm B | Tip Length mm C | Overall length mm D | Extension Height mm E | Available Screw Tools | |
|-----------|------------|--------------|-----------------|---------------------|-----------------------|-----------------------|---|
| D1001 | 0.65 | 1.50 | 4.00 | 29.90 | 14.80 | A | |
| Dxxxx | D1002 | 0.65 | 1.50 | 2.80 | 28.70 | 13.60 | A |
| Au | D1003 | 0.65 | 1.50 | 3.30 | 29.20 | 14.10 | A |
| | D1004 | 0.65 | 1.50 | 3.40 | 29.30 | 14.20 | A |
| | D1005 | 0.70 | 1.50 | 4.00 | 29.90 | 14.80 | A |
| | D1006 | 0.65 | 1.40 | 5.50 | 31.40 | 16.30 | A |
| | D0615 | 0.65 | 1.50 | 1.50 | 27.40 | 12.30 | A |
| | D0620 | 0.65 | 1.50 | 2.00 | 27.90 | 12.80 | A |
| | D0625 | 0.65 | 1.50 | 2.50 | 28.40 | 13.30 | A |
| | D0630 | 0.65 | 1.50 | 3.00 | 28.90 | 13.80 | A |
| | D0635 | 0.65 | 1.50 | 3.50 | 29.40 | 14.30 | A |
| | D0645 | 0.65 | 1.50 | 4.50 | 30.40 | 15.30 | A |
| | D0650 | 0.65 | 1.50 | 5.00 | 30.90 | 15.80 | A |

1015/G

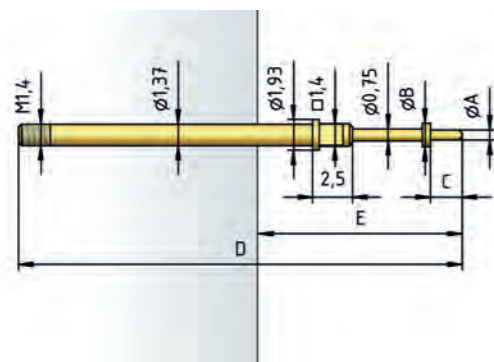

H 1015/GR-L

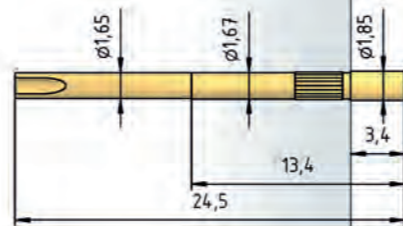


H 1015/GRV-L




This receptacle is sealed vacuum-tight when a wire is soldered on.
Important: If too much solder is used there is a risk that it will get into the thread.

H 1015/GR-ST1.0

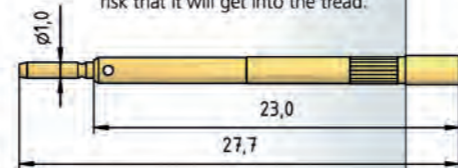

ST 1015-C1.0-V800-BK (without cable ST 1015-C1.0)

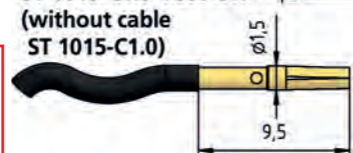

HOW TO ORDER


1015/ G - D1001 - 1.5 N - Au - 0.65

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 Tip Plating 6 Tip Diameter


Test Probe with Thread 100 mil / 2.54 mm

Series 1021/G


TIP STYLE · DIAMETER · PLATING



| A | A6 | B | B | BST |
|---------------|----------------------|---------|-----------------------------|------------|
| 2.00 Au/Ni/Rh | 1.80C Au 2.00C Au | 0.65 Ni | 0.80 Au/Ni/Rh 1.00 Au/Ni | 0.80 Au/Ni |



| C | C1S | CSS | D | D |
|---|----------------------|----------------------|------------|--------------------|
| 1.30 Au/Ni/Rh 1.40C Au 1.50 Au 1.80 Au/Ni/Rh 2.00 Au/Ni 2.30 Rh 2.50 Au/Ni 3.00 Rh | 1.20/2.00 Au/ HTK | 1.40/2.50 Au/ HTK | 0.65 Au/Ni | 0.80 Au 1.00 Au |



| D | D1 | F | F | F1 |
|---|------------|-----------------------|---|---------|
| 1.30 Au/Ni 1.40 Au 1.80 Ni 2.00 Au | 0.65 Au/Ni | 0.80 Au 1.00 Au/Ni | 1.40 Au 1.50 Au 1.80 Au 2.00 Au/Ni | 0.65 Ni |




| F4 | G | H | K | M |
|---------|-------------------------------------|--------------------|-------------------------------|---------|
| 0.80 Au | 1.30 Au/Ni 1.80 Au/Rh 2.00 Au | 1.80 Rh 2.00 Rh | 1.15 Ni 1.75 Ni 2.00 Rh | 1.80 Rh |




| Q |
|-----------------------|
| 1.00 Ni 1.30 Au/Ni |

1021/G

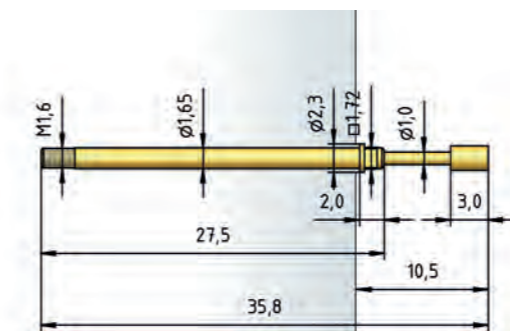

1021/5G

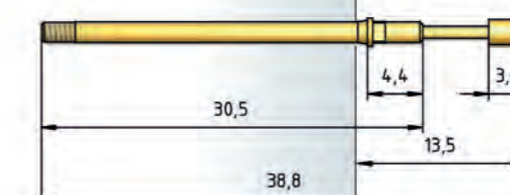

BENEFIT

- Test probe for cable harness testing
- Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle

MECHANICAL DATA

| | |
|--------------------------------|--------------------------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.30 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 0.30/ 0.40/ 0.50/ 0.70/ 1.00/ 1.00 N |
| Spring Force at Working Travel | 0.70/ 1.00/ 1.50/ 2.25/ 3.00/ 5.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 25 mOhm |

MATERIALS

| | |
|------------------------------|--|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, Stainless Steel, gold plated |
| Plunger | Steel, Plastic |
| Receptacle | Brass, gold plated |
| Stranded Wire AWG 20 (Black) | Copper, tin plated, insulated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.00 mm |
| HGW 2372 (Glass filled material) | 2.03 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--|--------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.50/ 0.50/ 0.80 N |
| Spring Force at Working Travel (Order Index E) | 1.50/ 2.25/ 3.00 N |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|--------------------------|------------|
| WFS 1021/G-2.54-1.8 | 1.8 |
| WFS 1021/G-2.54-2.0 | 2.0 |
| WFS 1021/G-3.5-3.0-Z | 3.0 |
| WFS 1021/G-C2S-3.0-2.5-Z | 2.5 |

Receptacles see page 114

HOW TO ORDER

1021/ 5 G - F - 1.5 N E - Au - 2.0

1 Series 2 Collar Height 3 Threaded Design 4 Tip Style 5 Spring Force 6 High Temperature 7 Tip Plating 8 Tip Diameter

Series 1021/G

Test Probe with Thread 100 mil / 2.54 mm for Position Test

BENEFIT

- Test probe for cable harness testing
- Test probe geometry for position test
- All designs available with collar height 5.0 mm
- Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle

MECHANICAL DATA

| | |
|--------------------------------|--|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.30 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 0.30/ 0.40/ 0.50/ 0.70/ 0.70/ 1.00/ 1.00 N |
| Spring Force at Working Travel | 0.70/ 1.00/ 1.50/ 2.25/ 2.50/ 3.00/ 5.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 25 mOhm |

MATERIALS

| | |
|------------------------------|--|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, Stainless Steel, gold plated |
| Plunger | Steel, gold plated |
| Receptacle | Brass, gold plated |
| Stranded Wire AWG 20 (Black) | Copper, tin plated, insulated |

RECOMMENDED DIAMETER OF DRILL


| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.00 mm |
| HGW 2372 (Glass filled material) | 2.03 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|------------------------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.50/ 0.70/ 1.00 N |
| Spring Force at Working Travel | (Order Index E) 1.50/ 2.25/ 3.00 N |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ | max. Plate-∅ |
|------------------------------|------------|--------------|
| WFS 1021/G-2.54-1.8 (A) | 1.8 | |
| WFS 1021/G-2.54-2.0 (B) | 2.0 | |
| WFS 1021/G-C25-3.0-2.5-Z (C) | 2.5 | |
| WFS 1021/G-3.5-3.0-Z (D) | 3.0 | |
| WFS 1021/G-2.54-1.5-SW (E) | 2.3 | |
| WFS 1021/G-3.0-1.5-SW (F) | 3.5 | |

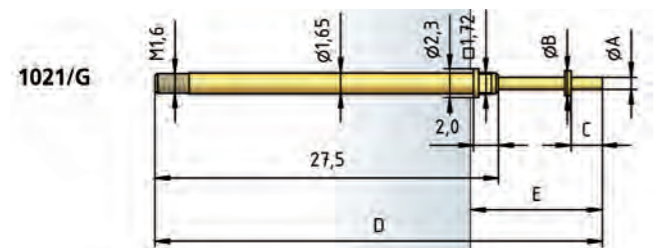

Receptacles see page 114

HOW TO ORDER

1021/ G - D1013 - 1.5 N E - Au - 0.65
 1 2 3 4 5 6 7

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 High Temperature
 6 Tip Plating 7 Tip Diameter

| Tip Style | Tip-∅ mm A | Plate-∅ mm B | Tip Length mm C | Overall length mm D | Extension Height mm E | Available Screw Tools |
|-----------|------------|--------------|-----------------|---------------------|-----------------------|-----------------------|
| D0615 | 0.65 | 1.80 | 1.50 | 34.80 | 9.50 | A |
| D0620 | 0.65 | 1.80 | 2.00 | 35.30 | 10.00 | A |
| D0630 | 0.65 | 1.80 | 3.00 | 36.30 | 11.00 | A |
| D0635 | 0.65 | 1.80 | 3.50 | 36.80 | 11.50 | A |
| D0640 | 0.65 | 1.80 | 4.00 | 37.30 | 12.00 | A |
| D0645 | 0.65 | 1.80 | 4.50 | 37.80 | 12.50 | A |
| D0650 | 0.65 | 1.80 | 5.00 | 38.30 | 13.00 | A |
| D0815 | 0.80 | 1.80 | 1.50 | 34.80 | 9.50 | A |
| D0820 | 0.80 | 1.80 | 2.00 | 35.30 | 10.00 | A |
| D0825 | 0.80 | 1.80 | 2.50 | 35.80 | 10.50 | A |
| D0830 | 0.80 | 1.80 | 3.00 | 36.30 | 11.00 | A |
| D0835 | 0.80 | 1.80 | 3.50 | 36.80 | 11.50 | A |
| D0840 | 0.80 | 1.80 | 4.00 | 37.30 | 12.00 | A |
| D0845 | 0.80 | 1.80 | 4.50 | 37.80 | 12.50 | A |
| D0850 | 0.80 | 1.80 | 5.00 | 38.30 | 13.00 | A |
| D1005 | 0.80 | 2.50 | 2.80 | 36.10 | 10.80 | C |
| D1007 | 1.00 | 2.50 | 2.60 | 35.90 | 10.60 | C |
| D1010 | 0.80 | 2.50 | 4.60 | 37.90 | 12.60 | C |
| D1011 | 0.80 | 1.95 | 2.80 | 36.10 | 10.80 | B |
| D1012 | 0.65 | 3.00 | 3.40 | 36.70 | 11.40 | D |
| D1013 | 0.65 | 1.80 | 2.50 | 35.80 | 10.50 | A |
| D1014 | 0.80 | 2.50 | 4.00 | 37.30 | 12.00 | C |
| D1015 | 0.80 | 2.30 | 3.20 | 36.50 | 11.20 | C |
| D1018 | 0.65 | 1.50 | 5.00 | 38.30 | 13.00 | A |
| D1019 | 1.00 | 1.80 | 2.00 | 35.30 | 10.00 | A |
| D1020 | 0.65 | 1.80 | 3.60 | 36.90 | 11.60 | A |
| D1024 | 0.65 | 1.50 | 4.30 | 37.60 | 12.30 | A |
| D7017 | 0.65 | 1.50 | 2.70 | 36.00 | 10.70 | A |

| Tip Style | Tip-∅ mm A | Plate-∅ mm B | Tip Length mm C | Overall length mm D | Extension Height mm E | Available Screw Tools |
|-----------|------------|--------------|-----------------|---------------------|-----------------------|-----------------------|
| D1906 | 0.80 | 3.50 | 3.20 | 36.50 | 11.20 | F |
| D1907 | 1.00 | 2.50 | 2.60 | 35.90 | 10.60 | F |
| D1910 | 0.80 | 2.50 | 4.60 | 37.90 | 12.60 | F |
| D1914 | 0.80 | 2.50 | 4.00 | 37.30 | 12.00 | F |
| D1915 | 0.80 | 2.30 | 3.20 | 36.50 | 11.20 | E |

| Tip Style | Tip-∅ mm A | Plate-∅ mm B | Tip Length mm C | Overall length mm D | Extension Height mm E | Available Screw Tools |
|-----------|------------|--------------|-----------------|---------------------|-----------------------|-----------------------|
| F0015 | 1.00 | 1.80 | 1.50 | 34.80 | 9.50 | A |
| F0020 | 1.00 | 1.80 | 2.00 | 35.30 | 10.00 | A |
| F0025 | 1.00 | 1.80 | 2.50 | 35.80 | 10.50 | A |
| F0030 | 1.00 | 1.80 | 3.00 | 36.30 | 11.00 | A |
| F0035 | 1.00 | 1.80 | 3.50 | 36.80 | 11.50 | A |
| F0040 | 1.00 | 1.80 | 4.00 | 37.30 | 12.00 | A |
| F0045 | 1.00 | 1.80 | 4.50 | 37.80 | 12.50 | A |
| F0050 | 1.00 | 1.80 | 5.00 | 38.30 | 13.00 | A |
| F1001 | 1.30 | 2.50 | 3.00 | 36.30 | 11.00 | C |
| F1008 | 1.00 | 2.30 | 3.30 | 36.60 | 11.30 | C |
| F1009 | 1.00 | 2.50 | 3.50 | 36.80 | 11.50 | C |
| F1016 | 1.50 | 3.00 | 2.50 | 35.80 | 10.50 | D |
| F1021 | 0.70 | 1.80 | 2.00 | 35.30 | 10.00 | A |
| F1033 | 0.70 | 1.80 | 1.50 | 34.80 | 9.50 | A |

| Tip Style | Tip-∅ mm A | Plate-∅ mm B | Tip Length mm C | Overall length mm D | Extension Height mm E | Available Screw Tools |
|-----------|------------|--------------|-----------------|---------------------|-----------------------|-----------------------|
| F1901 | 1.30 | 2.50 | 3.00 | 36.30 | 11.00 | F |
| F1908 | 1.00 | 2.30 | 3.30 | 36.60 | 11.30 | E |
| F1916 | 1.50 | 3.00 | 2.50 | 35.80 | 10.50 | F |

Fx9xx / Au

Test Probe with Thread 100 mil / 2.54 mm for Position Test

Series 1021/GT NEW

BENEFIT

- Test probe for cable harness testing
- Test probe geometry for position test
- Simplify screwing
- Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle

MECHANICAL DATA

| | |
|--------------------------------|--|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 0.30/ 0.40/ 0.50/ 0.70/ 0.70/ 1.00/ 1.00 N |
| Spring Force at Working Travel | 0.70/ 1.00/ 1.50/ 2.25/ 2.50/ 3.00/ 5.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 25 mOhm |

MATERIALS

| | |
|------------------------------|--|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, Stainless Steel, gold plated |
| Plunger | Steel, gold plated |
| Receptacle | Brass, gold plated |
| Stranded Wire AWG 20 (Black) | Copper, tin plated, insulated |

RECOMMENDED DIAMETER OF DRILL


| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.00 mm |
| HGW 2372 (Glass filled material) | 2.03 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|------------------------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.50/ 0.70/ 1.00 N |
| Spring Force at Working Travel | (Order Index E) 1.50/ 2.25/ 3.00 N |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ | max. Plate-∅ |
|---------------------|------------|--------------|
| WFS 1021/GT-1 (A) | 0.0...1.5 | 2.1...2.7 |
| WFS 1021/GT-2 (B) | 1.6...2.2 | 2.8...3.9 |

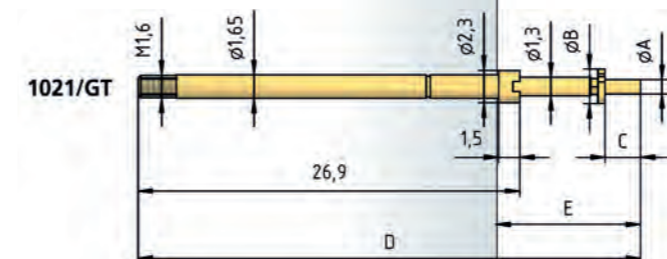

Receptacles see page 114

HOW TO ORDER

1021/ GT - D1707 - 3.0 N E - Au - 2.5
 1 2 3 4 5 6

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 High Temperature
 6 Tip Plating 7 Tip Diameter

Series 1028/G

Test Probe with Thread 100 mil / 2.54 mm

BENEFIT

Test probe for cable harness testing
Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle

High test accuracy

MECHANICAL DATA

| | |
|--------------------------------|--|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.30 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 0.30/ 0.40/ 0.60/ 0.80/ 0.90/ 1.10/ 1.30 N |
| Spring Force at Working Travel | 0.70/ 1.00/ 1.50/ 2.25/ 2.50/ 3.00/ 5.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 25 mOhm |

MATERIALS

| | |
|------------|--|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, Stainless Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.00 mm |
| HGW 2372 (Glass filled material) | 2.03 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|---|--------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.60/ 0.80/ 1.10 N |
| Spring Force at Working Travel (Order Index E) | 1.50/ 2.25/ 3.00 N |

AVAILABLE SCREW TOOLS

| Article Designation | max. Plate-∅ |
|--------------------------|--------------|
| WFS 1021/G-2.54-1.8 | 1.8 |
| WFS 1021/G-2.54-2.0 | 2.0 |
| WFS 1021/G-C2S-3.0-2.5-Z | 2.5 |
| WFS 1021/G-3.5-3.0-Z | 3.0 |

Receptacles see page 114

HOW TO ORDER


1028/ G - A - 1.5 N E - Ni - 1.8

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 High Temperature
6 Tip Diameter 7 Tip Plating

TIP STYLE · DIAMETER · PLATING

| | | | | |
|--------------------|--------------------|--------------------|--|----------------------|
| | | | | |
| A | B | BST | C | CSM |
| 1.50 Au 1.80 Ni | 1.30 Rh | 0.80 Au | 1.40 Au 1.80 Rh 2.50 Rh 3.50 Rh | 1.00/2.00 Au/ HTK |
| | | | | |
| D | D1 | EB | F | G |
| 1.40 Au 2.00 Au | 0.65 Ni 0.80 Ni | 1.80 Au | 1.30 Ni | 1.30 Ni |
| | | | | |
| G | H | H | K | M6 |
| 1.50 Rh | 1.30 Au | 1.40 Au 1.80 Au | 1.30 Au 1.75 Ni | 2.00 Rh |
| | | | | |
| Q | Q | Q5 | Q8 | V |
| 1.30 Au | 1.80 Au 2.00 Au | 1.30 Ni | 2.30 Ni | 1.30 Ni |

1028/G

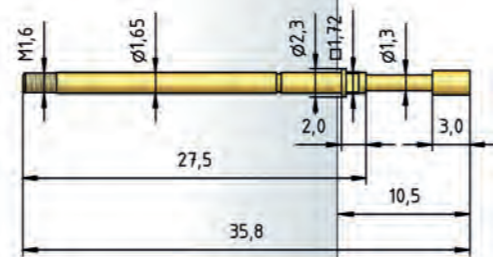

Test Probe with Thread 100 mil / 2.54 mm

TIP STYLE · DIAMETER · PLATING

| | | | | |
|----------|----------|----------|-----------|----------|
| | | | | |
| A | B | C | D1 | H |
| 2.00C Au | 1.00 Au | 2.00C Au | 0.80 Au | 1.00 Au |

BENEFIT

Test probe for cable harness testing
Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle

Compact Design

MECHANICAL DATA

| | |
|--------------------------------|-------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 4.50 mm |
| Working Travel | 3.50 mm |
| Pre-Loaded Spring Force | 0.30 N |
| Spring Force at Working Travel | 1.50 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, CuBe |
| Receptacle | Brass, gold plated |


RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.00 mm |
| HGW 2372 (Glass filled material) | 2.03 mm |


AVAILABLE SCREW TOOLS

| Article Designation | max. Plate-∅ |
|---------------------|--------------|
| WFS 1021/G-2.54-1.8 | 1.8 |
| WFS 1021/G-2.54-2.0 | 2.0 |

5310/G

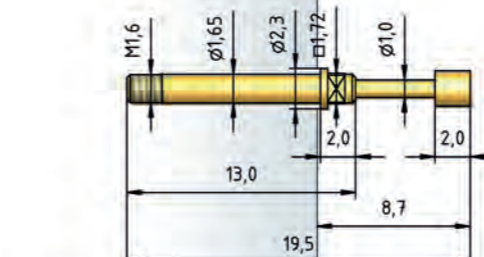

H 5310/GR-L

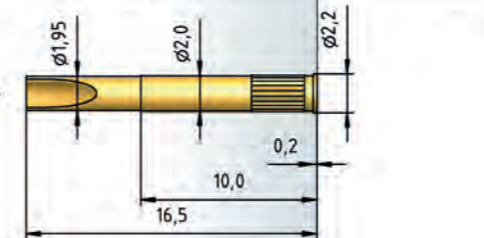

HOW TO ORDER

5310/ G - A - 1.5 N - Au - 2.0 C

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 Tip Plating
6 Tip Diameter 7 Tip Material (only for CuBe)

Series 1060/G

Test Probe with Thread 160 mil / 4.0 mm

Test Probe with Thread 160 mil / 4.0 mm for Position Test

Series 1060/G

BENEFIT

Test probe for cable harness testing
Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle

Very robust

MECHANICAL DATA

| | |
|--------------------------------|--------------------------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.50 mm |
| Working Travel | 4.40 mm |
| Pre-Loaded Spring Force | 0.20/ 0.20/ 0.40/ 0.50/ 0.80/ 0.70 N |
| Spring Force at Working Travel | 0.40/ 0.60/ 1.50/ 2.25/ 3.00/ 5.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------------------------|--|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, Stainless Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |
| Stranded Wire AWG 20 (Black) | Copper, tin plated, insulated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.00 mm |
| HGW 2372 (Glass filled material) | 3.01 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|--------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.40/ 0.40/ 0.80 N |
| Spring Force at Working Travel | |
| (Order Index E) | 1.50/ 2.25/ 3.00 N |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|----------------------|------------|
| WFS 1060/G-4.0-3.0 | 3.0 |
| WFS 1060/G-5.0-4.0-Z | 4.0 |
| WFS 1060/G-6.0-5.0-Z | 5.0 |
| WFS 1060/G4-5.0-4.0 | 4.0 |
| WFS 1060/G5-6.0-5.0 | 5.0 |

Receptacles see page 115

HOW TO ORDER


1060/ G - A - 1.5 N E - Au - 4.0
1 2 3 4 5 6 7

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 High Temperature
6 Tip Plating 7 Tip Diameter

TIP STYLE · DIAMETER · PLATING



| A | A6 | B | BA | BA1 |
|---------|----------|------------|------------|---------|
| 2.30 Au | 2.50C Au | 1.80 Ni/Rh | 1.80 Au/Ni | 1.50 Ni |
| 2.50 Ni | 4.00C Au | | | |
| 3.00 Au | | | | |
| 4.00 Au | | | | |





| C | C6 | D | D | D |
|---------------|------------|---------|---------|------------|
| 2.30 Au/Ni/Rh | 3.50 Au/Ni | 1.00 Rh | 1.80 Au | 2.30 Au/Ni |
| 2.50 Au/Ni/Rh | | | | 2.50 Au/Ni |
| 3.00 Au/Ni/Rh | | | | |
| 4.00 Au/Ni/Rh | | | | |




| D2 | D3 | F | F | F3 |
|------------|---------|------------|------------|---------|
| 3.00 Au/Ni | 0.80 Rh | 1.80 Au/Ni | 2.30 Au/Rh | 1.00 Rh |
| | 1.40 Au | | 2.50 Rh | 1.40 Au |
| | | | 3.00 Au | |
| | | | 4.00 Rh | |



| G | H | K | KF |
|---------------|------------|---------|---------|
| 2.30 Rh | 2.50 Ni | 1.80 Rh | 2.60 Ni |
| 2.50 Ni/Rh | 2.60 Ni | 3.00 Ni | 4.00 Ni |
| 4.00 Au/Ni/Rh | 3.00 Ni/Rh | | |
| | 4.20 Rh | | |

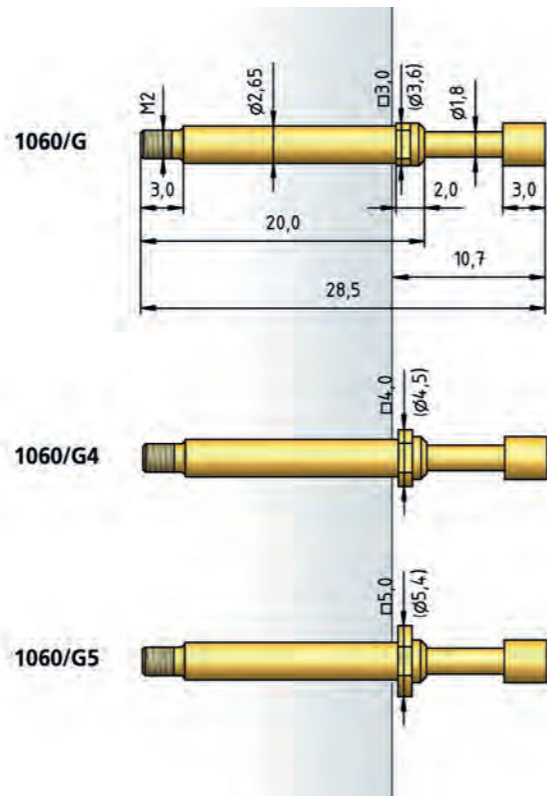

| Tip Style | Tip-∅ mm A | Plate-∅ mm B | Tip Length mm C | Overall length mm D | Extension Height mm E | Available Screw Tools |
|-----------|------------|--------------|-----------------|---------------------|-----------------------|-----------------------|
| BA2 | 1.80 | 4.00 | 3.00 | 29.00 | 11.20 | B |
| BA3 | 1.80 | 4.00 | 2.50 | 29.00 | 11.20 | B |
| BA5 | 1.80 | 4.00 | 2.50 | 28.50 | 10.70 | B |
| BA7 | 1.80 | 4.00 | 2.10 | 29.00 | 11.20 | B |
| BA71 | 1.80 | 4.00 | 2.10 | 29.00 | 11.20 | B |



| Tip Style | Tip-∅ mm A | Plate-∅ mm B | Tip Length mm C | Overall length mm D | Extension Height mm E | Available Screw Tools |
|-----------|------------|--------------|-----------------|---------------------|-----------------------|-----------------------|
| C42 / Ni | 4.00 | 5.00 mm | 1.00 | 28.50 | 10.70 | C |




| Tip Style | Tip-∅ mm A | Plate-∅ mm B | Tip Length mm C | Overall length mm D | Extension Height mm E | Available Screw Tools |
|-----------|------------|--------------|-----------------|---------------------|-----------------------|-----------------------|
| D1001 | 1.40 | 3.50 | 2.40 | 28.90 | 11.10 | A |
| D1002 | 1.40 | 3.50 | 4.00 | 30.50 | 12.70 | A |
| D1003 | 1.40 | 3.50 | 3.30 | 29.80 | 12.00 | A |
| D1004 | 1.00 | 3.50 | 4.00 | 30.50 | 12.70 | A |
| D1013 | 1.00 | 3.50 | 2.80 | 29.30 | 11.50 | A |



| Tip Style | Tip-∅ mm A | Plate-∅ mm B | Tip Length mm C | Overall length mm D | Extension Height mm E | Available Screw Tools |
|-----------|------------|--------------|-----------------|---------------------|-----------------------|-----------------------|
| D1904 | 1.00 | 3.50 | 4.00 | 30.50 | 12.70 | D |



| Tip Style | Tip-∅ mm A | Plate-∅ mm B | Tip Length mm C | Overall length mm D | Extension Height mm E | Available Screw Tools |
|-----------|------------|--------------|-----------------|---------------------|-----------------------|-----------------------|
| F11 | 1.30 | 4.70 | 7.00 | 33.50 | 15.70 | C |
| F12 | 1.30 | 4.70 | 5.00 | 33.50 | 15.70 | C |
| F13 | 1.30 | 4.70 | 2.00 | 30.50 | 12.70 | C |
| F14 | 2.60 | 4.00 | 1.80 | 29.00 | 11.20 | B |
| F33 | 2.00 | 4.00 | 2.50 | 36.00 | 18.70 | B |
| F40 | 1.50 | 4.00 | 2.65 | 28.50 | 10.70 | B |
| F41 | 4.00 | 4.70 | 2.00 | 28.50 | 10.70 | C |
| F1007 | 1.30 | 4.70 | 5.30 | 31.80 | 14.00 | C |
| F1008 | 1.40 | 3.50 | 2.00 | 28.50 | 10.70 | B |
| F1009 | 4.00 | 5.00 | 2.00 | 28.50 | 10.70 | C |
| F1010 | 1.40 | 3.50 | 1.70 | 28.20 | 10.40 | B |
| F1011 | 2.30 | 3.50 | 2.00 | 28.50 | 10.70 | B |
| F1012 | 1.40 | 3.50 | 3.00 | 29.50 | 11.70 | B |
| F1015 | 2.30 | 3.50 | 1.80 | 28.30 | 10.50 | B |
| F1016 | 1.30 | 4.70 | 3.60 | 30.10 | 12.30 | C |
| F1017 | 1.30 | 4.70 | 2.70 | 29.20 | 11.40 | C |
| F1018 | 1.80 | 4.50 | 1.50 | 28.00 | 10.20 | C |



| Tip Style | Tip-∅ mm A | Plate-∅ mm B | Tip Length mm C | Overall length mm D | Extension Height mm E | Available Screw Tools |
|-----------|------------|--------------|-----------------|---------------------|-----------------------|-----------------------|
| F1907 | 1.30 | 4.70 | 5.30 | 31.80 | 14.00 | D |
| F1909 | 4.00 | 5.00 | 2.00 | 28.50 | 10.70 | D |
| F1916 | 1.30 | 4.70 | 3.60 | 30.10 | 12.30 | D |
| F1917 | 1.30 | 4.70 | 2.70 | 29.20 | 11.40 | D |
| F1918 | 1.80 | 4.50 | 1.50 | 28.00 | 10.20 | D |

BENEFIT

Test probe for cable harness testing
Test probe geometry for position test
Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle

Very robust

MECHANICAL DATA

| | |
|--------------------------------|--------------------------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.50 mm |
| Working Travel | 4.40 mm |
| Pre-Loaded Spring Force | 0.20/ 0.20/ 0.40/ 0.50/ 0.80/ 0.70 N |
| Spring Force at Working Travel | 0.40/ 0.60/ 1.50/ 2.25/ 3.00/ 5.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------------------------|--|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, Stainless Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |
| Stranded Wire AWG 20 (Black) | Copper, tin plated, insulated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.00 mm |
| HGW 2372 (Glass filled material) | 3.01 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|--------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.40/ 0.40/ 0.80 N |
| Spring Force at Working Travel | |
| (Order Index E) | 1.50/ 2.25/ 3.00 N |

AVAILABLE SCREW TOOLS

| Article Designation | max. Plate-∅ |
|---------------------------|--------------|
| WFS 1060/G-4.0-3.0 (A) | 3.5 |
| WFS 1060/G-5.0-4.0-Z (B) | 4.0 |
| WFS 1060/G-6.0-5.0-Z (C) | 5.0 |
| WFS 1060/G-5.0-3.0-SW (D) | 5.0 |

Receptacles see page 115

HOW TO ORDER

1060/ G - D1013 - 1.5 N E - Au - 1.00
1 2 3 4 5 6 7

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 High Temperature
6 Tip Plating 7 Tip Diameter

NEW Series 1060/GT

Test Probe with Thread 160 mil / 4.0 mm for Position Test

BENEFIT

- Test probe for cable harness testing
- Test probe geometry for position test
- Simplify screwing
- Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle

MECHANICAL DATA

| | |
|--------------------------------|--------------------------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 0.20/ 0.20/ 0.40/ 0.50/ 0.80/ 0.70 N |
| Spring Force at Working Travel | 0.40/ 0.60/ 1.50/ 2.25/ 3.00/ 5.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------------------------|--|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, Stainless Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |
| Stranded Wire AWG 20 (Black) | Copper, tin plated, insulated |

RECOMMENDED DIAMETER OF DRILL


| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.00 mm |
| HGW 2372 (Glass filled material) | 3.01 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|------------------------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.40/ 0.40/ 0.80 N |
| Spring Force at Working Travel | (Order Index E) 1.50/ 2.25/ 3.00 N |

AVAILABLE SCREW TOOLS


| Article Designation | max. Tip-∅ | max. Plate-∅ |
|---------------------|------------|--------------|
| WFS 1021/GT-1 (A) | from 3.3 | from 3.5 |
| WFS 1060/GT-1 (B) | 0.0...3.3 | from 4.0 |



F16xx

Au

| Tip Style | Tip-∅ mm A | Plate-∅ mm B | Tip Length mm C | Overall length mm D | Extension Height mm E | Available Screw Tools |
|-----------|------------|--------------|-----------------|---------------------|-----------------------|-----------------------|
| F1609 | 4.00 | 5.00 | 2.00 | 28.30 | 10.50 | A |
| F1633 | 5.45 | 8.50 | 1.50 | 28.50 | 10.70 | A |




F17xx

Au

| Tip Style | Tip-∅ mm A | Plate-∅ mm B | Tip Length mm C | Overall length mm D | Extension Height mm E | Available Screw Tools |
|-----------|------------|--------------|-----------------|---------------------|-----------------------|-----------------------|
| F1717 | 1.30 | 4.70 | 2.70 | 29.00 | 11.20 | B |
| F1734 | 1.50 | 6.00 | 5.50 | 31.80 | 14.00 | B |

1060/GT

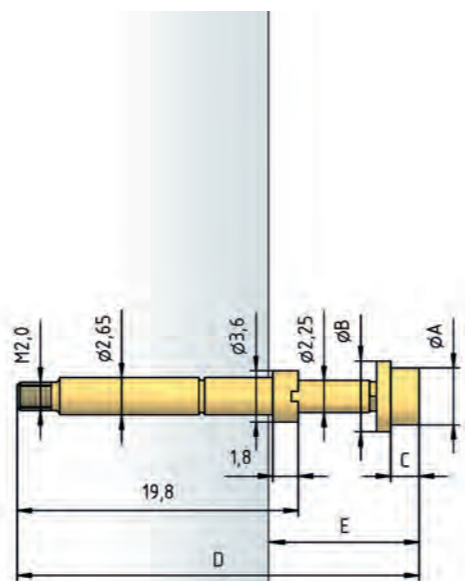

Test Probe with Thread 160 mil / 4.0 mm

Series 1061/G

TIP STYLE · DIAMETER · PLATING



| | |
|----------|-----------|
| B | BA |
| 1.80 Ni | 1.80 Rh |

BENEFIT

- Test probe for cable harness testing
- Increased installation height
- Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle
- Long full travel

MECHANICAL DATA

| | |
|--------------------------------|-------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 7.00 mm |
| Working Travel | 5.60 mm |
| Pre-Loaded Spring Force | 0.50/ 1.00 N |
| Spring Force at Working Travel | 1.50/ 3.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 35 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |


RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.00 mm |
| HGW 2372 (Glass filled material) | 3.01 mm |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 1060/G-4.0-3.0 | 3.0 |

1061/G

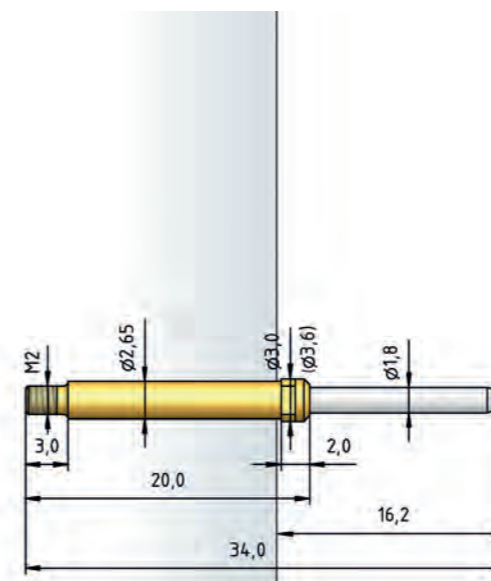

Receptacles see page 115

HOW TO ORDER

1060/ GT - F1717 - 1.5 N E - Au - 1.3

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 High Temperature 6 Tip Plating 7 Tip Diameter

Receptacles see page 115

HOW TO ORDER

1061/ G - B - 1.5 N - Ni - 1.8

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 Tip Plating 6 Tip Diameter

Series 5110/G

Test Probe with Thread 160 mil / 4.0 mm

BENEFIT

Test probe for cable harness testing
 Compact design
 Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle

MECHANICAL DATA

| | |
|--------------------------------|-----------------------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 3.50 mm |
| Working Travel | 2.80 mm |
| Spring Force at Working Travel | see High-Temperature Applications |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 10.0 A |
| Typical Continuity Resistance | ≤ 10 mOhm |

MATERIALS

| | |
|------------|------------------------------|
| Barrel | Brass, gold plated |
| Spring | Stainless Steel, gold plated |
| Plunger | CuBe, gold plated |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.10 mm |
| HGW 2372 (Glass filled material) | 3.12 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|--------------------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.25/ 0.30/ 0.45/ 0.50/ 1.00 N |
| Spring Force at Working Travel | |
| (Order Index E) | 0.80/ 1.20/ 1.50/ 2.50/ 3.50 N |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|----------------------|------------|
| WFS 1060/G-4.0-3.0 | 3.0 |
| WFS 1060/G-5.0-4.0-Z | 4.0 |
| WFS 1060/G-6.0-5.0-Z | 5.0 |

HOW TO ORDER

5110/ G - D - 1.5 N E - Au - 2.3 C

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 High Temperature
 6 Tip Plating 7 Tip Diameter 8 Tip Material (only for CuBe)

TIP STYLE · DIAMETER · PLATING




| C | D | D1 | E | F |
|----------|----------|----------|----------|----------|
| 2.30C Au | 2.30C Au | 2.30C Au | 2.30C Au | 2.30C Au |
| 3.50C Au | | | | |



K2

2.30C Au

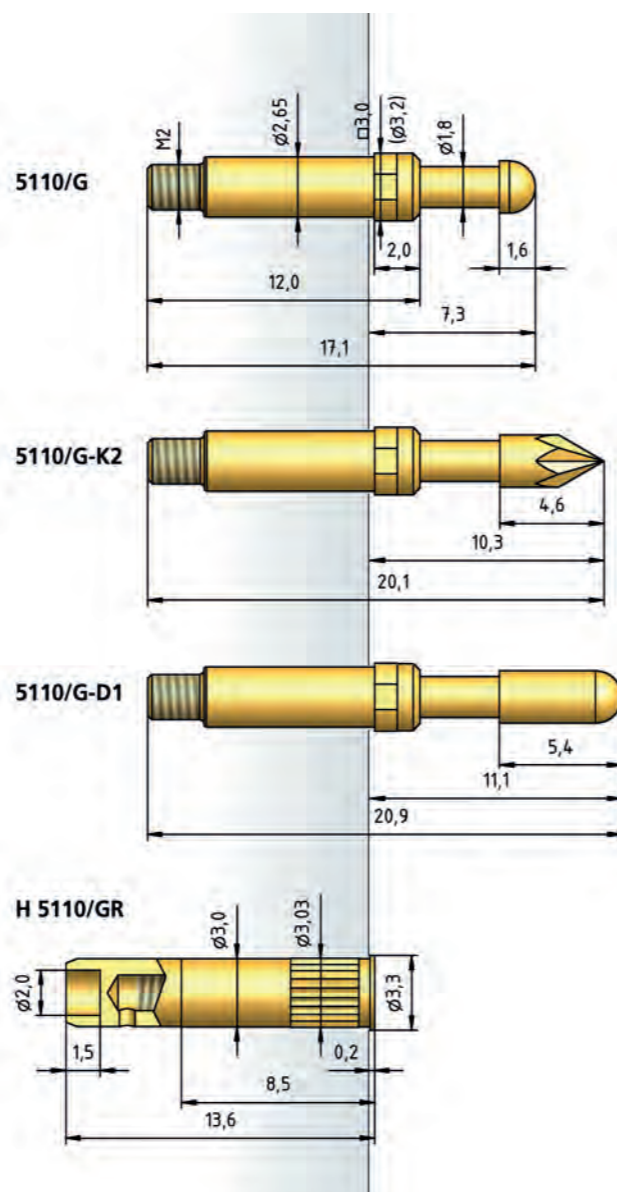

Test Probe with Thread 177 mil / 4.50 mm

Series 1042/G

TIP STYLE · DIAMETER · PLATING



| C |
|----------|
| 3.00C Au |
| 4.00C Au |

BENEFIT

Test probe for cable harness testing
 Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle
 Long full travel

MECHANICAL DATA

| | |
|--------------------------------|--------------------|
| Center | 4.50 mm / 177 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 6.00 mm |
| Working Travel | 5.60 mm |
| Pre-Loaded Spring Force | 0.40/ 0.80/ 0.80 N |
| Spring Force at Working Travel | 1.50/ 3.00/ 5.00 N |

ELECTRICAL DATA

| Connector Receptacle | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

Connector Plunger

| | |
|-------------------------------|---------------|
| Max. Current Rating | 12.0...15.0 A |
| Typical Continuity Resistance | ≤ 10 mOhm |

MATERIALS


| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.50 mm |
| HGW 2372 (Glass filled material) | 3.52 mm |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|--|------------|
| Screwdriver for Slotted Screws 1.8x0.5 | all |

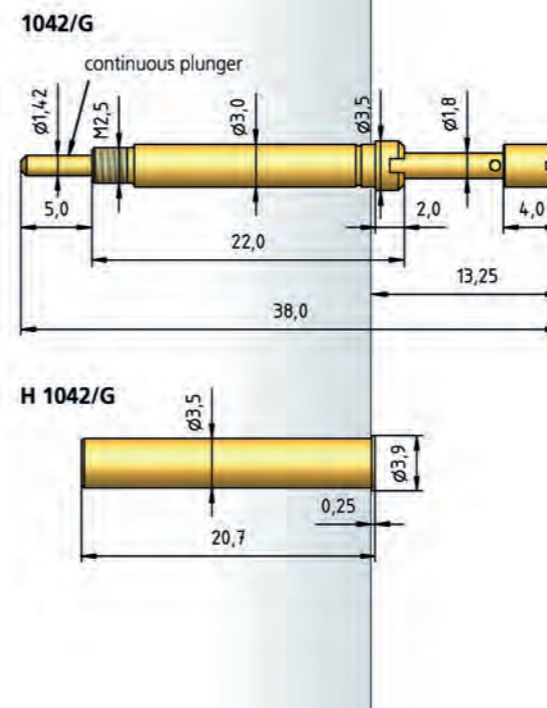

HOW TO ORDER

1042/ G - C - 1.5 N - Au - 4.0 C

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 Tip Plating
 6 Tip Diameter 7 Tip Material (only for CuBe)

Receptacles 1021/G

Receptacles for Series
1021/G • 1021/G for Position Test • 1021/GT for Position Test • 1028/G

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.00 mm |
| HGW 2372 (Glass filled material) | 2.03 mm |

MATERIALS

| | |
|------------------------------|-------------------------------|
| Receptacle | Brass, gold plated |
| Stranded Wire AWG 20 (Black) | Copper, tin plated, insulated |

H 1021/GR-C


H 1021/GR-L

H 1021/GRV-L

H 1021/5GRV-L

H 1021/GR-ST1.0

ST 1015-C1.0-V800-BK (WITHOUT CABLE ST 1015-C1.0)

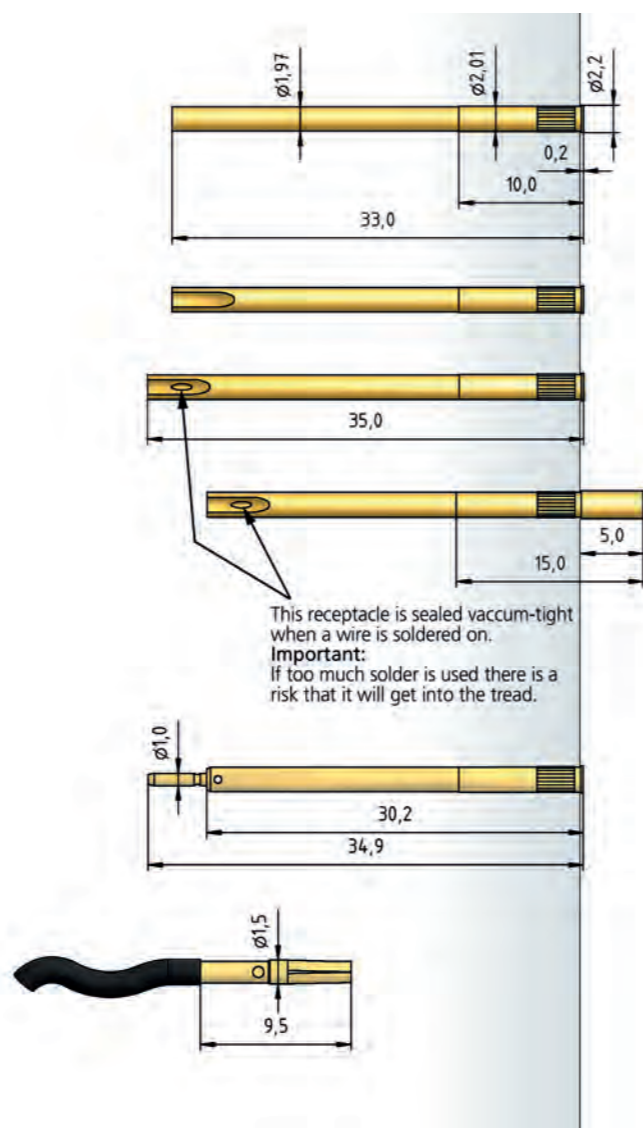

Receptacles for Series
1060/G • 1060/G for Position Test • 1060/GT for Position Test • 1061/G

Receptacles 1060/G

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.00 mm |
| HGW 2372 (Glass filled material) | 3.01 mm |

MATERIALS

| | |
|------------------------------|-------------------------------|
| Receptacle | Brass, gold plated |
| Stranded Wire AWG 20 (Black) | Copper, tin plated, insulated |


H 1060/G-L

H 1060/GR-L

H 1060/GRV-L

H 1060/GR-ST1.0

ST 1015-C1.0-V800-BK (WITHOUT CABLE ST 1015-C1.0)

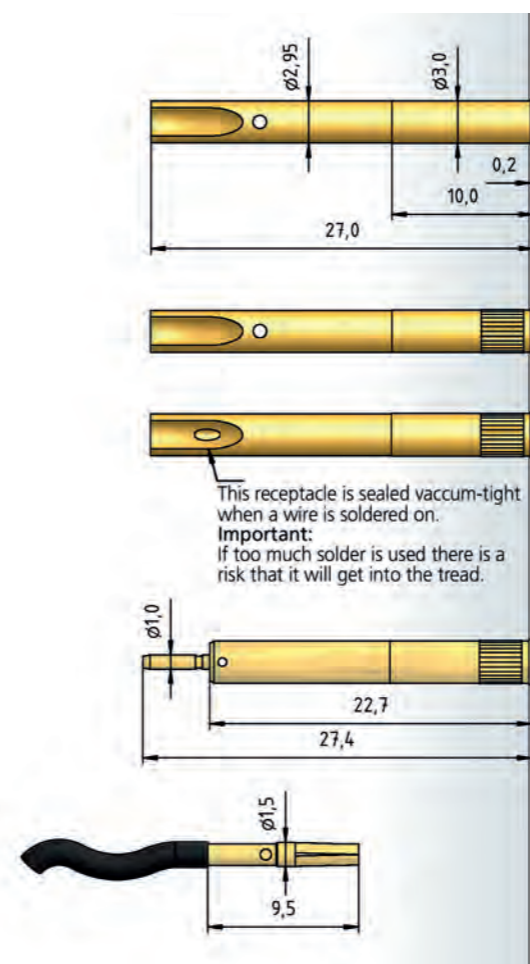

NON-ROTATING TEST PROBES

Non-Rotating Test Probes are always used for the precisely-positioned contact-creation of a connector barrel.

This is normally the case in the testing of flat connectors, as used for example in fuse holders. Contacting then takes place with rectangular so-called spade-shaped tip styles.

Two construction principles are mainly used in order to fix the test probe in position. The purpose of these principles is to create a compulsory guide for the plunger in the test probe barrel. In the simple design, the plunger is guided in the barrel by means of a bolt-groove system. The test probe must be inserted into the receptacle in exactly the right position. If maintenance is needed, the newly-placed test probe must be repositioned.

It is easier to carry out the procedure with a plunger whose end is flattened and has a guide slot at the end of the receptacle. With this principle, the receptacle is placed in position only once. For every new assembly, the test probe is then always returned to the same position via the guide slot of the receptacle.

| SERIES | CENTER | PAGE |
|---------|-------------------|------|
| 2053 | 100 mil / 2.54 mm | 118 |
| 1053 | 197 mil / 5.00 mm | 119 |
| 1021/GV | 100 mil / 2.54 mm | 120 |
| 1053/GV | 160 mil / 4.00 mm | 121 |



Series 2053

Non-Rotating Test Probe 100 mil / 2.54 mm

BENEFIT

Anti-turn feature ensures forced guidance between plunger and barrel
Knurled section on the barrel guarantees secure fit of the test probe

MECHANICAL DATA

| | |
|--------------------------------|--------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 0.45/ 0.60/ 1.00 N |
| Spring Force at Working Travel | 1.50/ 3.00/ 5.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |













MATERIALS


| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|----------------|
| HP 2361.1 (Trolitax) | 1.98...2.00 mm |
| HGW 2372 | 1.98...2.00 mm |

TIP STYLE · DIAMETER · PLATING

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| Y1 | Y21 | Y1F | Y1F | Y1F |
| 2.00 x 0.58 Au | 2.00 x 0.50 Au | 1.50 x 0.50 x 2.00 Au | 1.50 x 0.58 x 2.00 Au | 1.50 x 0.58 x 2.80 Au |
|  |  |  |  |  |
| Y1F1 | Y2F | Y3F | Y6 | Y11 |
| 1.50 x 0.58 x 2.80 x 2.00 Au | 1.50 x 0.50 x 2.00 Rh | 1.50 x 0.50 x 2.50 Au | 3.00 x 1.55 Au | 2.00 x 0.58 Au |
|  |  | | | |
| Y12 | Y21R | | | |
| 1.80 x 0.80 Au | 2.00 x 0.50 Au | | | |

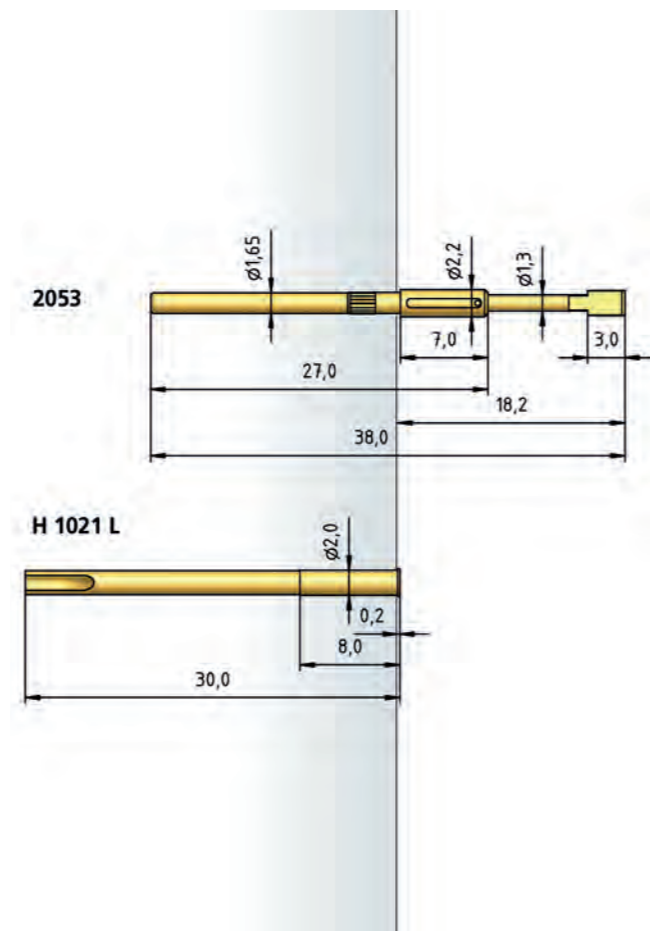

HOW TO ORDER












2053 - **Y1** - **1.5 N** - **Au** - **2.0x 0.58**

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter 6 Tip Thickness


Non-Rotating Test Probe 160 mil / 4.0 mm

Series 1053


TIP STYLE · DIAMETER · PLATING

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| CY | Y | Y4 | Y3 | Y5 |
| 6.00x3.00C Au | 5.00x1.00C Au 5.00x1.00C Ni | 4.00x1.00C Ni | 5.00x0.50C Ni | 4.00x0.65C Ni |
|  |  |  |  |  |
| Y8 | Y10 | Y11 | Y14 | Y15 |
| 5.00x1.00C Au | 3.00x0.80C Ni | 2.25x0.65C Ni | 3.80x0.40C Ni | 4.50x1.00C Au |
|  | | | | |
| Y16 | | | | |
| 5.00x1.00C Au | | | | |


1053-Y (also for Tip Styles Y4 / Y15 / CY)

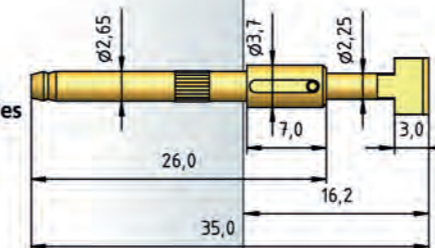

1053-Y8

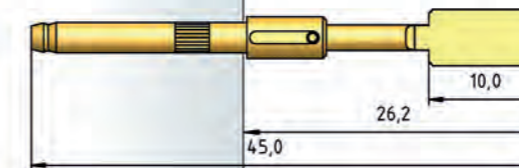

1053-Y16

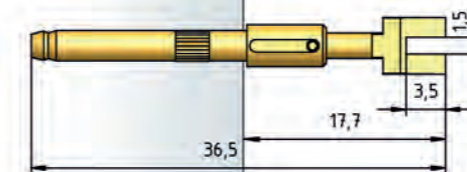

1053-Y3 (also for Tip Styles Y5 / Y10 / Y11 / Y14)



BENEFIT

Anti-turn feature ensures forced guidance between plunger and barrel
Knurled section on the barrel guarantees secure fit of the test probe

MECHANICAL DATA

| | |
|--------------------------------|--------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 0.50/ 0.80/ 1.25 N |
| Spring Force at Working Travel | 1.50/ 3.00/ 5.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 8.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------|--|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, Stainless Steel, gold plated |
| Plunger | CuBe |
| Receptacle | Brass, gold plated |


RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 3.00 mm |
| HGW 2372 | 3.00 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|---|------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.50 N |
| Spring Force at Working Travel (Order Index E) | 1.50 N |


H 1050 L

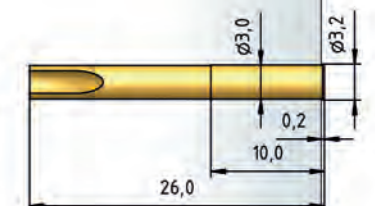

H 1050 LST



H 1050 W

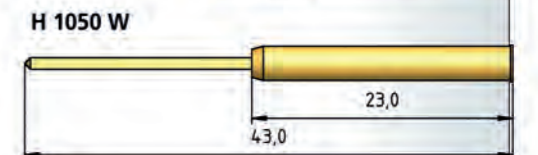

HOW TO ORDER

1053 - **Y** - **1.5 N** **E** - **Ni** - **5.0x 1.0 C**

1 Series 2 Tip Style 3 Spring Force 4 High Temperature 5 Tip Plating 6 Tip Diameter 7 Tip Thickness 8 Tip Material (only for CuBe)

Series 1021/GV

Non-Rotating Test Probe 100 mil / 2.54 mm

BENEFIT

Anti-turn feature ensured by the square section on the plunger and the slot in the receptacle

Forced guidance of the test probe ensures that the receptacle must only be aligned once

MECHANICAL DATA

| | |
|--------------------------------|------------------------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.30 mm (Y4-4.30 mm / Y14-4.15 mm) |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 0.30/ 1.00 N |
| Spring Force at Working Travel | 1.50/ 3.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 25 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, gold plated |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 2.00 mm |
| HGW 2372 | 2.03 mm |

AVAILABLE SCREW TOOLS


| Article Designation | max. Tip-∅ |
|--------------------------|------------|
| WFS 1021/G-2.54-1.8 | 1.8 |
| WFS 1021/G-2.54-2.0 | 2.0 |
| WFS 1021/G-3.5-3.0-Z | 3.0 |
| WFS 1021/G-C2S-3.0-2.5-Z | 2.5 |

HOW TO ORDER


1021/ G V - Y4 - 1.5 N - Au - 1.5 x0.5 C
1 2 3 4 5 6 7 8 9

1 Series 2 Threaded Design 3 Non-rotating Design 4 Tip Style 5 Spring Force 6 Tip Plating 7 Tip Diameter 8 Tip Thickness 9 Tip Material (only for CuBe)


TIP STYLE · DIAMETER · PLATING




| Y4 | Y442 | Y | Y | Y1 |
|--------------|-------------|--------------|---------------------|---------------------|
| 1.50x0.50 Au | 1.5x0.50 Au | 0.75x0.50 Au | 0.97/1.00 x 0.63 Au | 0.97/1.00 x 0.63 Au |



| Y1F | Y5 | Y14 | Y14 | Y14 |
|-----------------------|----------------|----------------|----------------|----------------|
| 1.50 x 0.50 x 2.00 Au | 1.50 x 0.80 Au | 1.10 x 0.45 Au | 2.00 x 0.60 Au | 2.00 x 0.80 Au |




| Y14 |
|----------------|
| 1.50 x 1.00 Au |

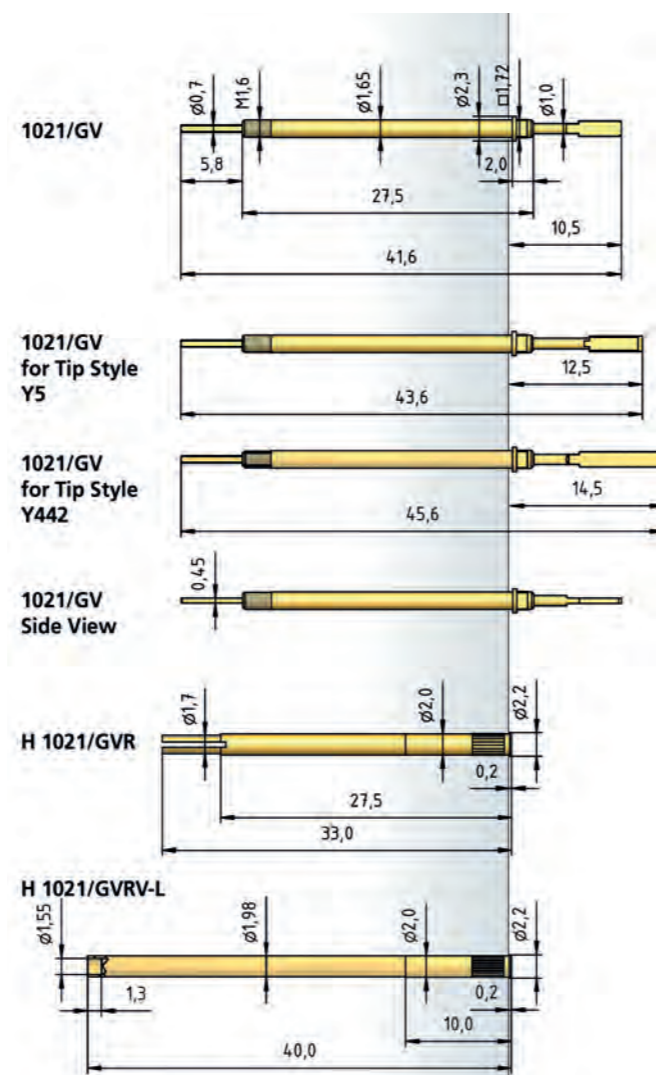


Non-Rotating Test Probe 160 mil / 4.0 mm

Series 1053/G

TIP STYLE · DIAMETER · PLATING




| Y | Y | Y3 | Y4 | Y5 |
|---------------|---------------|---------------|---------------|---------------|
| 3.00x1.00C Au | 5.00x1.00C Au | 5.00x0.50C Au | 4.00x1.00C Au | 4.00x0.65C Ni |




| Y8 | Y11 | Y15 |
|---------------|---------------|---------------|
| 5.00x0.70C Au | 2.15x0.65C Au | 3.00x0.70C Au |

1053/G

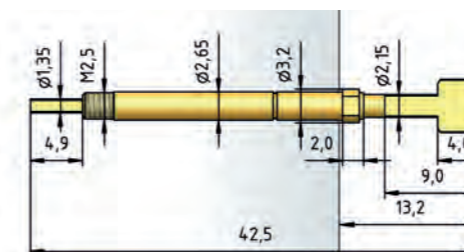

1053/G-Y8

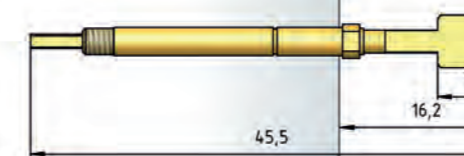


1053/G-Y15




1053/G side view



H 1053/GVRV-L

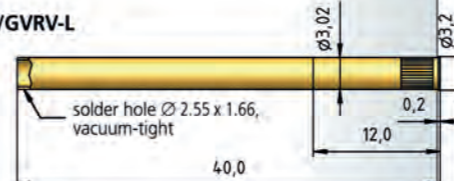

H 1053/GRV-SEV

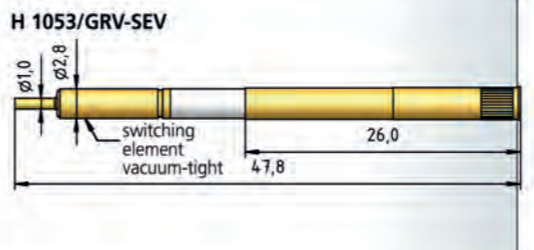

BENEFIT

Anti-turn feature ensured by the square section on the plunger and the slot in the receptacle

Forced guidance of the test probe ensures that the receptacle must only be aligned once

MECHANICAL DATA

| | |
|---|--------------------------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Switching Travel | |
| (with Switching Element) | 2.50 mm |
| Pre-Loaded Spring Force | 0.30/ 0.40/ 0.50/ 0.80/ 0.80/ 1.00 N |
| Spring Force at Working Travel | 0.50/ 1.50/ 2.00/ 3.00/ 4.00/ 5.00 N |
| Spring Force at Working Travel (with Switching Element) | +1.00 N |

ELECTRICAL DATA

| Receptacle-Plunger | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 15 mOhm |
| Pin-Plunger | |
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 3.01 mm |
| HGW 2372 | 3.03 mm |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|----------------------|------------|
| WFS 1053/G-5.0-4.0-Z | 4.0 |
| WFS 1053/G-6.0-5.0-Z | 5.0 |

HOW TO ORDER

1053/ G - Y4 - 1.5 N - Au - 4.0x 0.65 C
1 2 3 4 5 6 7 8

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 Tip Plating 6 Tip Diameter 7 Tip Thickness 8 Tip Material (only for CuBe)

SWITCHING TEST PROBES

WITHOUT THREAD

Switching Test Probes are primarily used for component checks. To do this, the electric circuit used for signal transfer opens or closes according to a defined switching travel.

For operation, a connection on the receptacle and on the connector pin is normally required. For maintenance work, the use of easy replacement receptacles can save a lot of time because there is no need for rewiring of the connector pin (see page 136). Thanks to our high-precision manufacturing processes, centers of from 4.00 mm to 1.91 mm can be achieved.


Component Check with Switching Test Probes

As a rule, PTR Switching Test Probes operate on the "closer principle". Switching Test Probes can be seen as "axial micro-switches" which, according to a defined switching travel, create an electrically conducting connection between the inner conductor and the outer probe of the Switching Test Probe. "Opener" contacts (NC) are also available for the 3010/2F (see page 131) and 3011/2FGS (see page 147) series.

In addition to a large number of metal tips, PTR also offers versions with insulated tips. These can be supplied as a full-plastic tip and, for improved wear resistance, as a metal tip insulated against the plunger. PTR also offers a so-called "neutral Switching Test Probe" in the version with a plastic tip and hard-wearing protective metal ring.

Applications / Features

- » Check on presence of components or connectors, principally for the cable test, e.g. to check secondary locking
- » Potential-free contacting by means of the above-mentioned insulating tip versions

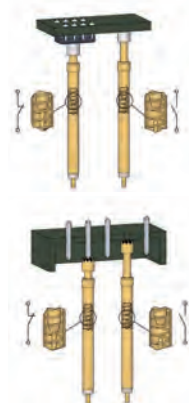

| SERIES | CENTER | PAGE |
|------------------|-------------------|------|
| 3035 | 75 mil / 1.91 mm | 124 |
| 3024 | 75 mil / 1.91 mm | 125 |
| 3020/2 | 100 mil / 2.54 mm | 126 |
| 3026/2W | 100 mil / 2.54 mm | 127 |
| 3030 | 100 mil / 2.54 mm | 128 |
| 3003 | 125 mil / 3.18 mm | 129 |
| 3010/2 - 3010/10 | 160 mil / 4.00 mm | 130 |
| 3010/2F | 160 mil / 4.00 mm | 131 |
| 3010/2W | 160 mil / 4.00 mm | 132 |
| 3010/2V | 160 mil / 4.00 mm | 133 |
| 3015.06 | 256 mil / 6.50 mm | 134 |



Series 3035

Switching Test Probe „Closer“ (NO) 75 mil / 1.91 mm

BENEFIT

- Switching test probe for the cable harness test and presence verification
- Switching test probe „Closer“ (NO) type
- Switching test probe for small center
- High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|------------------|
| Center | 1.91 mm / 75 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 2.60 mm |
| Pre-Loaded Spring Force | 0.30 N |
| Spring Force at Working Travel | 2.00 N |
| Spring Force at Switching Travel | 1.10 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe, gold plated |
| Receptacle | Bronze, gold plated |


RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.30 mm |
| with pressed-in Ring | 1.36 mm |
| HGW 2372 (Glass filled material) | 1.32 mm |
| with pressed-in Ring | 1.37 mm |

TIP STYLE · DIAMETER · PLATING



| C | D | F | F |
|----------|----------|----------|----------|
| 0.80C Au | 0.65C Au | 0.65C Au | 0.80C Au |

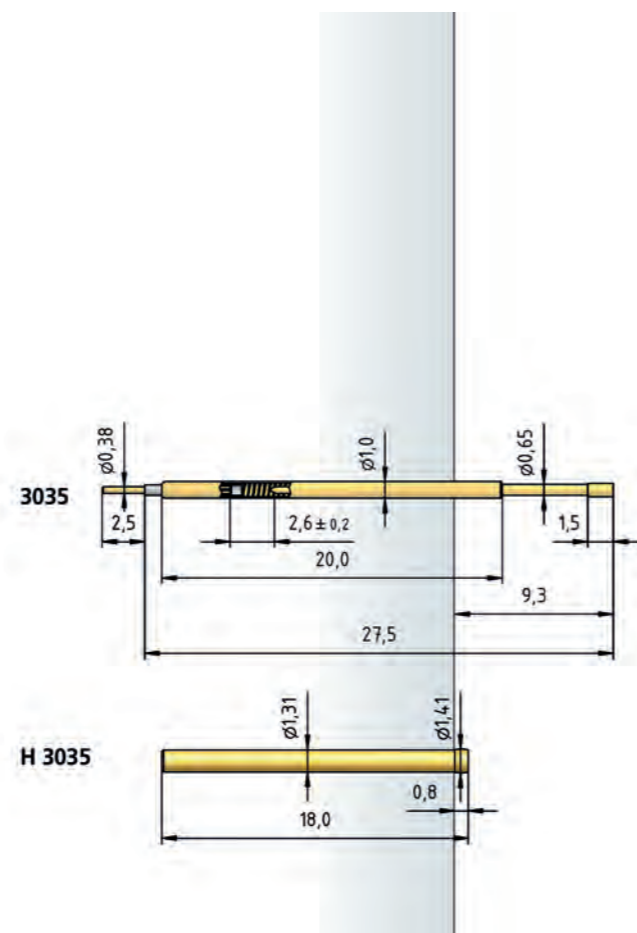

HOW TO ORDER

3035 - **F** - **2.0 N** - **Au** - **0.8 C**
 1 2 3 4 5 6

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
 6 Tip Material (only for CuBe)


Switching Test Probe „Closer“ (NO) 75 mil / 1.91 mm

Series 3024

TIP STYLE · DIAMETER · PLATING



| C | D | F | F1 | FS1 |
|----------|----------|----------|----------|------------|
| 1.80C Au | 1.00C Au | 1.00C Au | 1.80 HTK | 2.00C Ni/S |

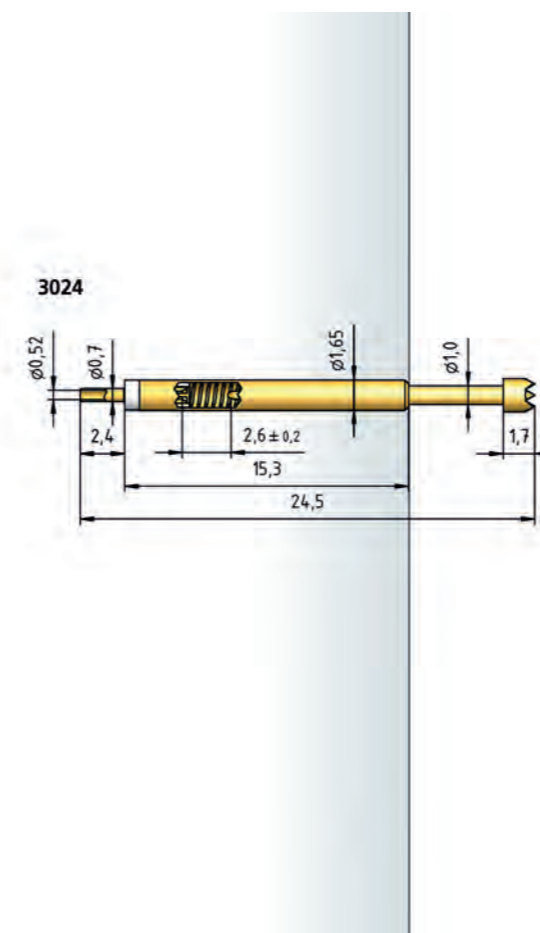

BENEFIT

- Switching test probe for the cable harness test and presence verification
- Available with thread (see page 141)
- Switching test probe „Closer“ (NO) type
- Short design
- High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|--------------------|
| Center | 1.91 mm / 75 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 2.60 mm |
| Pre-Loaded Spring Force | 0.30/ 0.50/ 0.50 N |
| Spring Force at Working Travel | 1.35/ 2.00/ 2.50 N |
| Spring Force at Switching Travel | 1.00/ 1.50/ 1.80 N |

ELECTRICAL DATA

Receptacle-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

Pin-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|----------------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe, gold plated with Insulator |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.15 mm |
| HGW 2372 (Glass filled material) | 2.16 mm |

HOW TO ORDER

3024 - **C** - **2.0 N** - **Au** - **1.8 C**
 1 2 3 4 5 6

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
 6 Tip Material (only for CuBe)

Series 3020/2

Switching Test Probe „Closer“ (NO) 100 mil / 2.54 mm

BENEFIT

Switching test probe for the cable harness test and presence verification
 Available with thread (see page 138)
 Switching test probe „Closer“ (NO) type
 Switching travel 4.0 mm on request
 High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|--------------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.30 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 2.60 mm |
| Pre-Loaded Spring Force | 0.15/ 0.40/ 0.50/ 1.70 N |
| Spring Force at Working Travel | 0.80/ 1.50/ 3.00/ 6.50 N |
| Spring Force at Switching Travel | 0.25/ 0.80/ 1.80/ 4.50 N |

ELECTRICAL DATA

Receptacle-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

Pin-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.00 mm |
| HGW 2372 (Glass filled material) | 2.01 mm |

HOW TO ORDER

3020/ 2 - F - 1.5 N - Au - 1.5

1 Series 2 Collar Height 3 Tip Style 4 Spring Force 5 Tip Plating 6 Tip Diameter


TIP STYLE · DIAMETER · PLATING



| A | C | C3 | F | F |
|---------|---------|---------|---------|---------|
| 1.50 Au | 1.30 Au | 1.50 Au | 0.80 Au | 1.00 Au |
| | 1.50 Au | | | 1.30 Au |
| | 3.00 Au | | | 1.50 Au |



F1
1.50 HTK

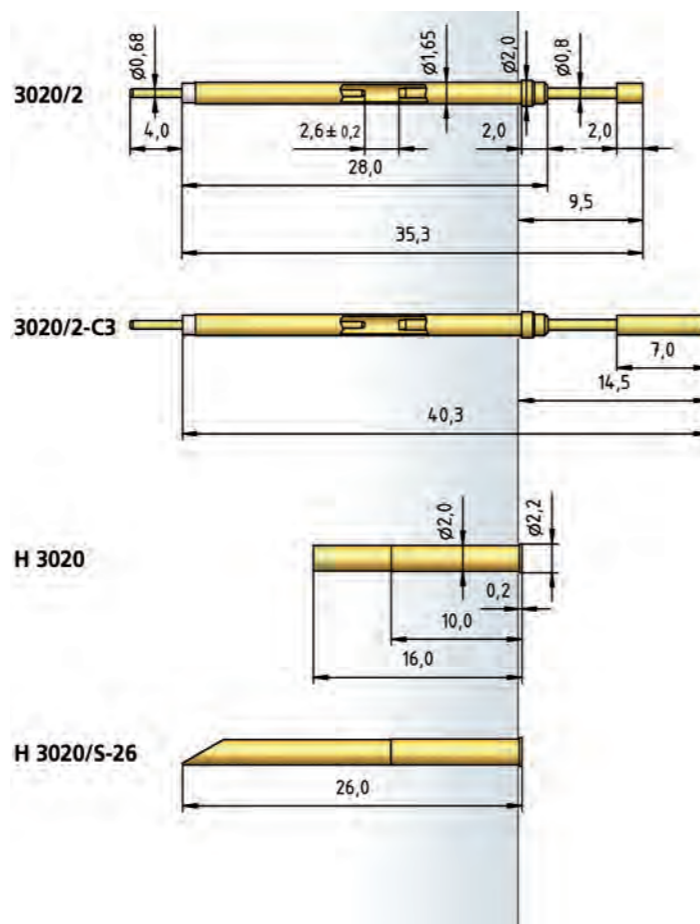

Switching Test Probe „Closer“ (NO) with Easy-Replacement System
 100 mil / 2.54 mm

Series 3026/2W

TIP STYLE · DIAMETER · PLATING



| A | A6 | C | D | D1 |
|----------|----------|----------|----------|----------|
| 1.80C Au | 1.80C Au | 1.80C Au | 1.00C Au | 0.64C Au |
| | | | | 0.80C Au |



F F1
1.00C Au 1.80C HTK
1.80C Au

BENEFIT

Switching test probe for the cable harness test and presence verification
 Easy-replacement system (replacement without soldering)
 Switching test probe „Closer“ (NO) type
 High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|--------------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 1.50 mm |
| Pre-Loaded Spring Force | 0.15/ 0.40/ 0.50/ 1.70 N |
| Spring Force at Working Travel | 0.80/ 1.50/ 3.00/ 6.50 N |
| Spring Force at Switching Travel | 0.20/ 0.60/ 1.25/ 3.30 N |

ELECTRICAL DATA

Receptacle-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

Pin-Plunger


| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe, gold plated |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.00 mm |
| HGW 2372 (Glass filled material) | 2.01 mm |

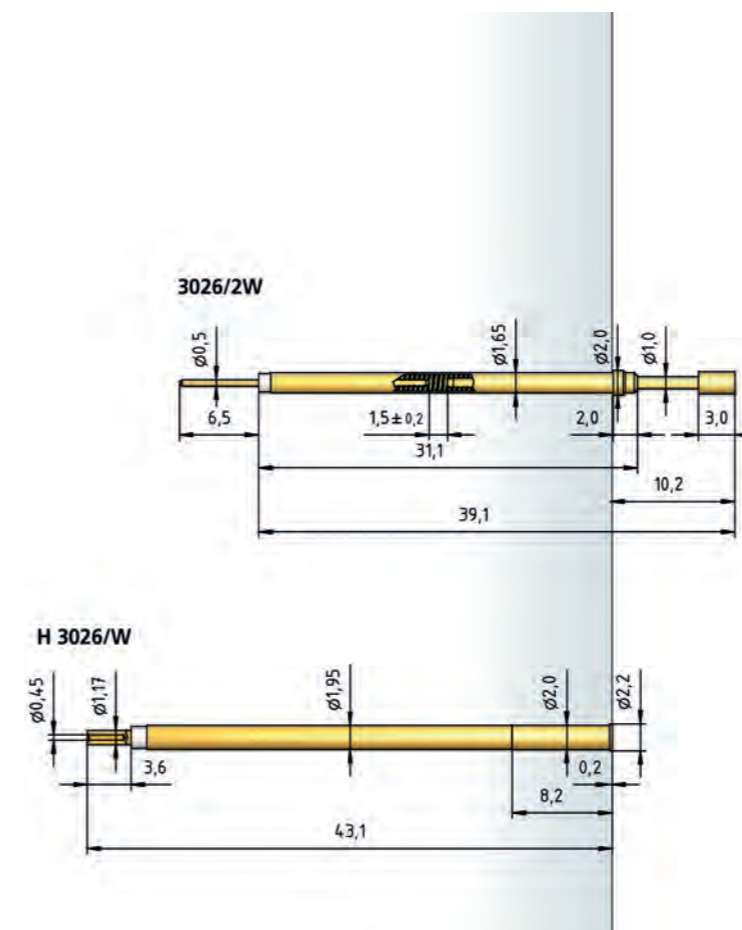

HOW TO ORDER

3026/ 2 W - F - 1.5 N - Au - 1.8

1 Series 2 Collar Height 3 Interchangeable without Soldering 4 Tip Style 5 Spring Force 6 Tip Plating 7 Tip Diameter

Series 3030

Switching Test Probe „Closer“ (NO) 100 mil / 2.54 mm

BENEFIT

Switching test probe for the cable harness test and presence verification
 Available with thread (see page 142)
 Switching test probe „Closer“ (NO) type
 High soldering temperature up to 300°C
 Thin switching test probe

MECHANICAL DATA

| | |
|----------------------------------|------------------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 6.30 mm (5.80 mm bei 3030-L) |
| Working Travel | 5.00 mm |
| Switching Travel | 4.00 mm |
| Pre-Loaded Spring Force | 0.25/ 0.25/ 0.30 N |
| Spring Force at Working Travel | 1.00/ 1.50/ 2.00 N |
| Spring Force at Switching Travel | 0.60/ 0.60/ 1.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Bronze, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.65 mm |
| with pressed-in Ring | 1.75 mm |
| HGW 2372 (Glass filled material) | 1.67 mm |
| with pressed-in Ring | 1.76 mm |


TIP STYLE · DIAMETER · PLATING



| C | D | D1 | DL | F |
|---------|---------|---------|---------|---------|
| 1.00 Au | 0.65 Au | 0.61 Au | 0.65 Au | 1.00 Au |
| 1.30 Au | | | | |



| |
|-----------|
| FL |
| 0.70 Au |

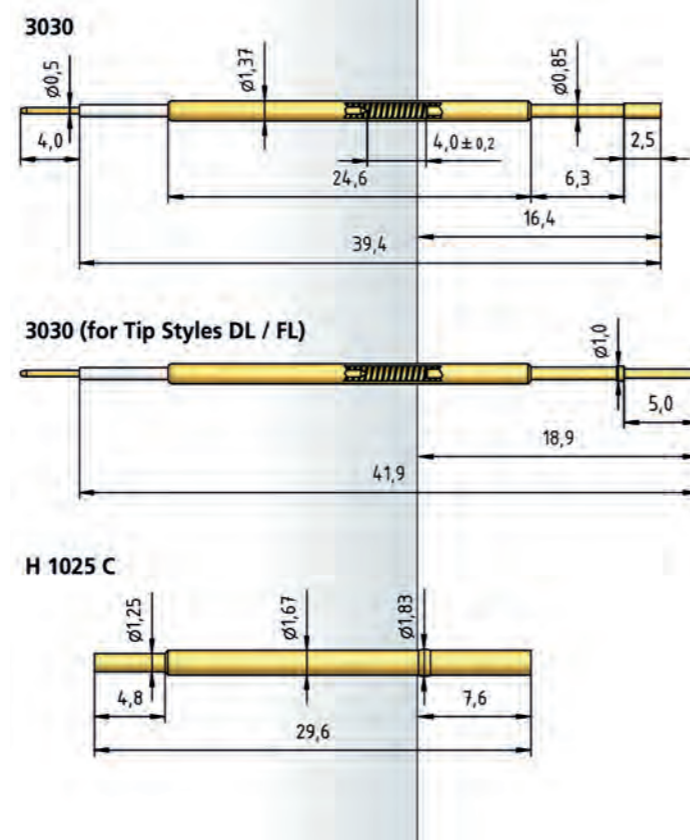

HOW TO ORDER

3030 - C - 2.0 N - Au - 1.0/ 0.5x 4.0

1 2 3 4 5 6 7

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
 6 Connector Pin Diameter 7 Connector Pin Length

Switching Test Probe „Closer“ (NO) 125 mil / 3.18 mm

Series 3003

TIP STYLE · DIAMETER · PLATING



| |
|----------|
| F |
| 1.02C Au |

BENEFIT

Use without receptacle
 Defined stop due to a press-in Ring at the barrel
 Switching test probe „Closer“ (NO) type
 High soldering temperature up to 300°C

MECHANICAL DATA


| | |
|----------------------------------|-------------------|
| Center | 3.18 mm / 125 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 7.5 mm |
| Working Travel | 5.00 mm |
| Switching Travel | 0.65 mm |
| Pre-Loaded Spring Force | 0.40 N |
| Spring Force at Working Travel | 1.15 N |
| Spring Force at Switching Travel | 0.55 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 4.5 A |
| Typical Continuity Resistance | ≤ 15 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|-------------|-------------------------|
| Barrel | Bronze, gold plated |
| Spring | Steel Wire, gold plated |
| Plunger | CuBe, gold plated |
| Connect Pin | CuBe, gold plated |

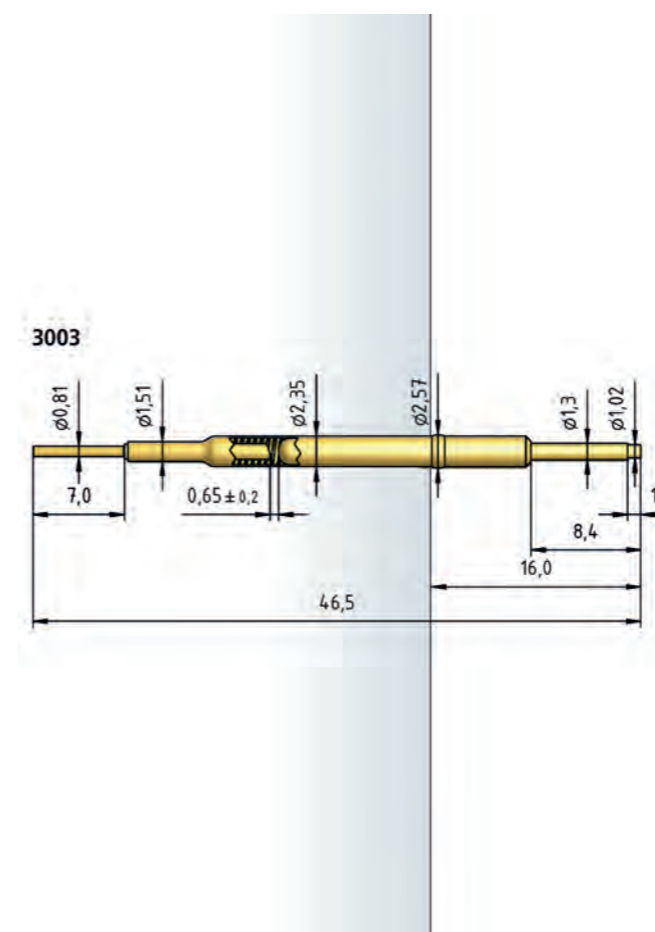

HOW TO ORDER

3003 - F - 1.15 N - Au - 1.02 C

1 2 3 4 5 6

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
 6 Tip Material (only for CuBe)

Series 3010/2 • 3010/10

Switching Test Probe „Closer“ (NO) 160 mil / 4.0 mm

BENEFIT

Switching test probe for the cable harness test and presence verification
 Available with thread (see page 145)
 Switching test probe „Closer“ (NO) type
 Switching travel 4.0 mm on request
 High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|--|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 1.70 mm |
| Pre-Loaded Spring Force | 0.12/ 0.30/ 1.80/ 1.70/ 2.70/ 5.00 N |
| Spring Force at Working Travel | 1.25/ 2.30/ 7.00/ 9.00/ 10.00/ 13.00 N |
| Spring Force at Switching Travel | 0.18/ 0.70/ 3.60/ 4.40/ 5.40/ 8.00 N |

ELECTRICAL DATA

Receptacle-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 15 mOhm |

Pin-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.00 mm |
| HGW 2372 (Glass filled material) | 3.01 mm |

TABLE CONNECTOR PIN

| Connector Pin Ø X (mm) | Connector Pin Length Y (mm) |
|------------------------|-----------------------------|
| 0.5 | 6.0 |
| 1.0 | 2.5 |
| 1.0 | 4.0 |

LENGTHS FOR TEST PROBE 3010/2 FOR TIP STYLES CLx / FLx

| Tip Style | E (mm) | L (mm) |
|-----------|--------|--------|
| CL, CL1 | 16.7 | 42.5 |
| CL2 | 22.2 | 48.0 |
| CL3, FL3 | 22.9 | 48.7 |

LENGTHS FOR TEST PROBE 3010/10 FOR TIP STYLES CLx / FLx

| Tip Style | E (mm) | L (mm) |
|-----------|--------|--------|
| CL, CL1 | 24.7 | 42.5 |
| CL2 | 30.2 | 48.0 |
| CL3, FL3 | 30.9 | 48.7 |

HOW TO ORDER

3010/ 2 - A - 2.3 N - Au - 2.3 /1.0x 4.0

1 Series 2 Collar Height 3 Tip Style 4 Spring Force 5 Tip Plating
 6 Tip Diameter 7 Connector Pin Diameter 8 Connector Pin Length

TIP STYLE · DIAMETER · PLATING

| | | | | |
|--------------------|--|-------------------------------|-----------|-----------|
| A | C | C | CL | C1 |
| 2.30 Au | 1.80 Au | 2.30 Au 3.00 Au 4.00 Au | 2.30 Au | 1.00 Au |
| CL1 | CL2 | CL3 | D6 | F |
| 1.00 Au | 1.80 Au | 1.00 Au | 1.00 Au | 1.80 Au |
| F | F1 | FL3 | H2 | |
| 2.00 Au 2.30 Au | 2.30 HTK 3.00 HTK 4.00 HTK 5.00 HTK | 1.00 Au | 2.60 Au | |

Switching Test Probe „Opener“ (NC) 160 mil / 4.0 mm

Series 3010/2F

TIP STYLE · DIAMETER · PLATING

| | | |
|----------|------------|----------------------------------|
| C | CL1 | F1 |
| 2.30 Au | 1.00 Au | 3.00 HTK 4.00 HTK 5.00 HTK |

BENEFIT

Switching test probe for the cable harness test and presence verification
 Switching test probe "Opener" (NC) type
 High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|-------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 1.70 mm |
| Pre-Loaded Spring Force | 0.40 N |
| Spring Force at Working Travel | 2.30 N |
| Spring Force at Switching Travel | 1.00 N |

ELECTRICAL DATA

Receptacle-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 15 mOhm |

Pin-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.00 mm |
| HGW 2372 (Glass filled material) | 3.01 mm |

TABLE CONNECTOR PIN

| Connector Pin Ø X (mm) | Connector Pin Length Y (mm) |
|------------------------|-----------------------------|
| 0.5 | 6.0 |
| 1.0 | 2.5 |
| 1.0 | 4.0 |

HOW TO ORDER

3010/ 2 F - C - 2.3 N - Au - 2.3/ 1.0x 4.0

1 Series 2 Collar Height 3 Type Opener 4 Tip Style 5 Spring Force 6 Tip Plating
 7 Tip Diameter 8 Connector Pin Diameter 9 Connector Pin Length

Series 3010/2W

Switching Test Probe „Closer“ (NO) with Easy-Replacement System
160 mil / 4.0 mm

BENEFIT

- Switching test probe for the cable harness test and presence verification
- Easy-replacement system (replacement without soldering)
- Available with thread (see page 146)
- Switching test probe „Closer“ (NO) type
- Switching travel 4.0 mm on request
- High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|--|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 1.70 mm |
| Pre-Loaded Spring Force | 0.12/ 0.25/ 0.30/ 0.40/ 0.60/ 1.80/ 1.40/ 1.70/ 2.00/ 2.00/ 5.00/ 4.00 N |
| Spring Force at Working Travel | 1.25/ 1.75/ 2.30/ 2.80/ 4.00/ 7.00/ 7.50/ 9.00/ 9.50/ 10.50/ 13.00/ 13.50 N |
| Spring Force at Switching Travel | 0.20/ 0.45/ 0.75/ 1.00/ 1.60/ 3.60/ 3.60/ 4.40/ 4.80/ 5.20/ 8.00/ 7.60 N |

ELECTRICAL DATA

Receptacle-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 15 mOhm |

Pin-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.00 mm |
| HGW 2372 (Glass filled material) | 3.01 mm |

LENGTHS FOR TEST PROBE 3010/2W FOR TIP STYLES CLx / FLx






| Tip Style | E (mm) | L (mm) |
|-----------|--------|--------|
| CL, CL1 | 16.7 | 42.5 |
| CL2 | 22.2 | 48.0 |
| CL3, FL3 | 22.9 | 48.7 |






HOW TO ORDER





3010/ 2 W - A - 2.3 N - Au - 2.3/ 1.0x 7.5
1 2 3 4 5 6 7 8 9


- Series
- Collar Height
- Interchangeable without Soldering
- Tip Style
- Spring Force
- Tip Plating
- Tip Diameter
- Connector Pin Diameter
- Connector Pin Length

TIP STYLE · DIAMETER · PLATING

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| A | C | C | CL | C1 |
| 2.30 Au | 1.80 Au | 2.30 Au 3.00 Au 4.00 Au | 2.30 Au | 1.00 Au |

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| CL1 | CL2 | CL3 | D6 | F |
| 1.00 Au | 1.80 Au | 1.00 Au | 1.00 Au | 1.80 Au |



| | | | |
|---|---|---|---|
|  |  |  |  |
| F | F1 | FL3 | H2 |
| 2.00 Au 2.30 Au | 2.30 HTK 3.00 HTK 4.00 HTK 5.00 HTK | 1.00 Au | 2.60 Au |

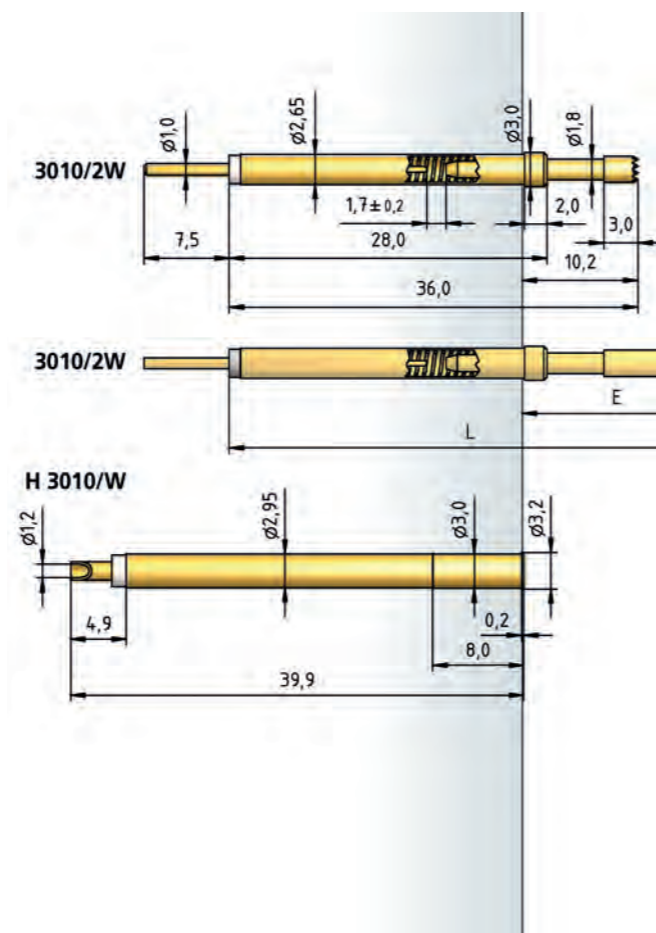

Switching Test Probe „Closer“ (NO) - Non-Rotating“ 160 mil / 4.0 mm

Series 3010/2V

TIP STYLE · DIAMETER · PLATING

| | |
|---|---|
|  |  |
| Y | Y5 |
| 1.90 x 1.00 Au | 4.00 x 0.65 Au |

BENEFIT

- Switching test probe for the cable harness test and presence verification
- Switching test probe „Closer“ (NO) type
- Non-rotating variant
- High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|---------------------------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 1.70 mm |
| Pre-Loaded Spring Force | 0.12/ 0.30/ 1.80/ 1.70/ 2.70/ 5.00 N |
| Spring Force at Working Travel | 1.25/ 2.30/ 7.00/ 9.00/ 10.00/13.00 N |
| Spring Force at Switching Travel | 0.18/ 0.70/ 3.60/ 4.40/ 5.40/ 8.00 N |

ELECTRICAL DATA

Receptacle-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 15 mOhm |

Pin-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS


| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.00 mm |
| HGW 2372 (Glass filled material) | 3.01 mm |

TABLE CONNECTOR PIN

| Connector Pin Ø X (mm) | Connector Pin Length Y (mm) |
|------------------------|-----------------------------|
| 0.5 | 6.0 |
| 1.0 | 2.5 |
| 1.0 | 4.0 |

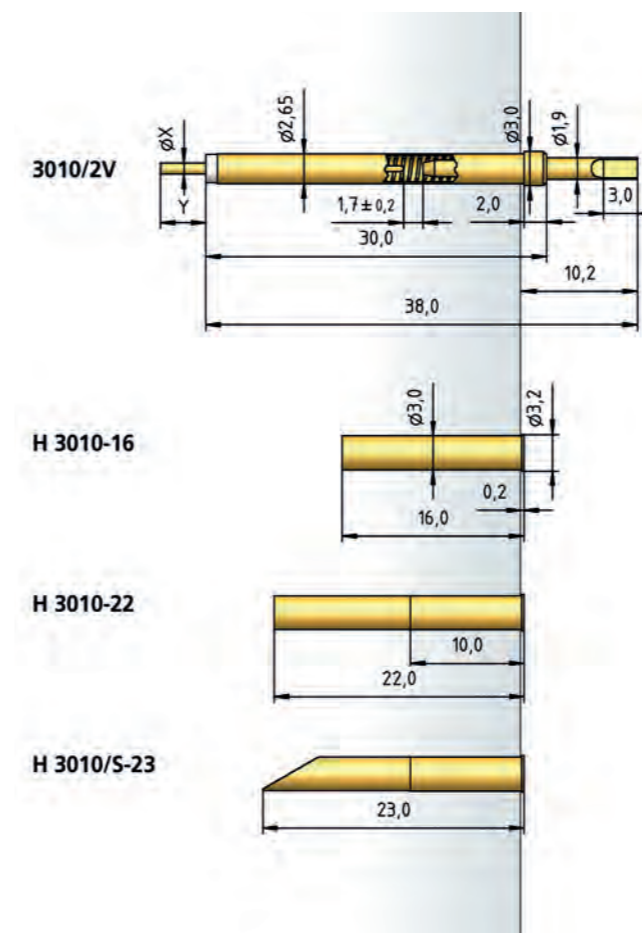

HOW TO ORDER

3010/ 2 V - Y - 2.3 N - Au - 1.9x 1.0 /1.0x 4.0
1 2 3 4 5 6 7 8 9 10

- Series
- Collar Height
- Non-rotating Design
- Tip Style
- Spring Force
- Tip Plating
- Tip Diameter
- Tip Thickness
- Connector Pin Diameter
- Connector Pin Length

NEW Series 3015.06

Ball-Head Switching Test Probe „Closer“ (NO) 256 mil / 6.5 mm

BENEFIT

- Ball-head switching test probe for presence detection with side activation
- Precision ball plunger guide
- Switching test probe „Closer“ (NO) type
- Outer housing neutral (insulated of the electrical circuit)

MECHANICAL DATA

| | |
|----------------------------------|-------------------|
| Center | 6.50 mm / 256 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 1.40 mm |
| Working Travel | 1.20 mm |
| Switching Travel | 0.80 mm |
| Pre-Loaded Spring Force | 0.50 N |
| Spring Force at Working Travel | 0.80 N |
| Spring Force at Switching Travel | 0.70 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 25 mOhm |


MATERIALS

| | |
|---------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |

TIP STYLE · DIAMETER · PLATING



D
5.00 Ni

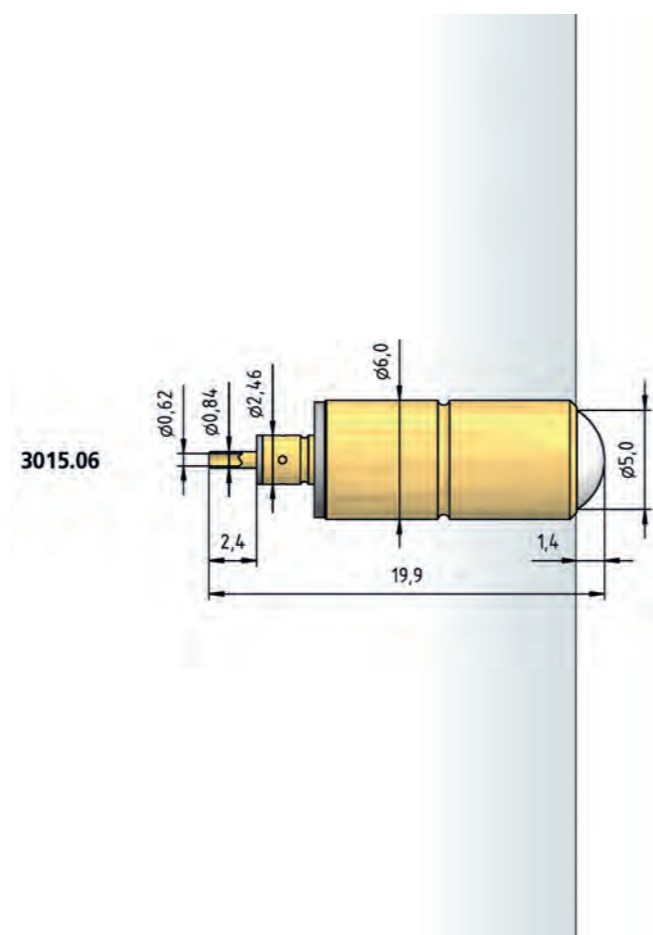

HOW TO ORDER

3015 .06 - D - 0.8 N - Ni - 5.0

1 Series 2 Variant 3 Tip Style 4 Spring Force 5 Tip Plating 6 Tip Diameter

SWITCHING TEST PROBES WITH THREAD

Switching Test Probes are available in various designs, from simple plug-in types (see page 122) to threaded types to easy-replacement systems.

Threaded Switching Test Probes are used primarily for cable testing and when a later change to the installation height is necessary (up to 5.0 mm). In these cases, the thread prevents the successive twisting of the Test Probe out of the receptacle. In each case, the electrical connection takes place via a connection to the connector pin of the Switching Test Probe and a connection to the receptacle.


Series 3014/2G and 3024/2G, which have an overall length of only 24.5 mm, are especially compact. As an alternative, both series are available with the easy-replacement system.

Series 3015/G, with its ball-shaped design and a working travel of only 0.8 mm, is especially suitable for applications in which horizontal contacting is necessary.

Switching Test Probes with Easy-Replacement System

The PTR easy-replacement system for switching test probes makes it possible to replace the test probe without releasing the wiring. In this case, the wiring takes place directly on the insulated connection piece of the easy-replacement threaded receptacle which remains in the test module during replacement of the test probe.

The test probe and receptacle are fitted with a matching sprung plug-in system which creates secure, electrical contacting. At the same time, this makes possible faster replacement of the test probe, which contributes to a reduction in servicing times.

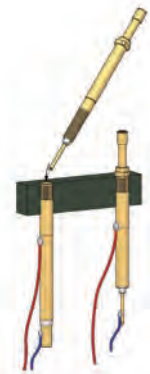

| SERIES | CENTER | PAGE |
|---------------------|-------------------|------|
| 3020/2G | 100 mil / 2.54 mm | 138 |
| 3020/2GW5 | 100 mil / 2.54 mm | 139 |
| 3023/2GS | 100 mil / 2.54 mm | 140 |
| 3024/2G | 100 mil / 2.54 mm | 141 |
| 3030/GW3 | 100 mil / 2.54 mm | 142 |
| 3012/2GS | 138 mil / 3.50 mm | 143 |
| 3012/2GS · FS1/FLS1 | 138 mil / 3.50 mm | 144 |
| 3010/2G · 3010/10G | 160 mil / 4.00 mm | 145 |
| 3010/2GW(5) | 160 mil / 4.00 mm | 146 |
| 3011/2GS | 160 mil / 4.00 mm | 147 |
| 3011/2FGS | 160 mil / 4.00 mm | 148 |
| 3014/2G | 160 mil / 4.00 mm | 149 |
| 3214/2GW | 160 mil / 4.00 mm | 150 |
| 3015/G | 300 mil / 7.50 mm | 151 |



Series 3020/2G

Switching Test Probe „Closer“ (NO) 100 mil / 2.54 mm

BENEFIT

- Switching test probe for the cable harness test and presence verification
- Available without thread (see page 126)
- Switching test probe „Closer“ (NO) type
- Switching travel 4.0 mm on request
- High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|--------------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.30 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 2.60 mm |
| Pre-Loaded Spring Force | 0.15/ 0.40/ 0.50/ 1.70 N |
| Spring Force at Working Travel | 0.80/ 1.50/ 3.00/ 6.50 N |
| Spring Force at Switching Travel | 0.25/ 0.80/ 1.80/ 4.50 N |

ELECTRICAL DATA

Receptacle-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

Pin-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.15 mm |
| HGW 2372 (Glass filled material) | 2.16 mm |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|--------------------------|------------|
| WFS 1021/G-2.54-1.8 | 1.8 |
| WFS 1021/G-2.54-2.0 | 2.0 |
| WFS 1021/G-3.5-3.0-Z | 3.0 |
| WFS 1021/G-C2S-3.0-2.5-Z | 2.5 |




TIP STYLE · DIAMETER · PLATING



| A | C | C3 | F | F |
|---------|---------|---------|---------|---------|
| 1.50 Au | 1.30 Au | 1.50 Au | 0.80 Au | 1.00 Au |
| | 1.50 Au | | | 1.30 Au |
| | 3.00 Au | | | 1.50 Au |



F1
1.50 HTK

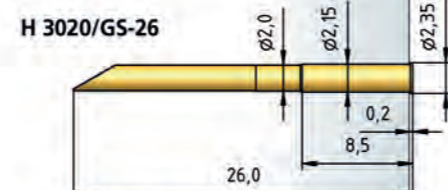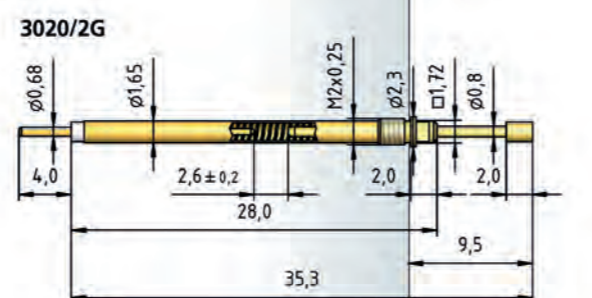

HOW TO ORDER

3020/ 2 G - F - 1.5 N - Au - 1.5
1 2 3 4 5 6 7

1 Series 2 Collar Height 3 Threaded Design 4 Interchangeable without Soldering 5 Adjustment Area of the Extension Height 6 Tip Style 7 Tip Diameter

Switching Test Probe „Closer“ (NO) with Easy-Replacement System
100 mil / 2.54 mm




TIP STYLE · DIAMETER · PLATING



| A | C | C3 | F | F |
|---------|---------|---------|---------|---------|
| 1.50 Au | 1.30 Au | 1.50 Au | 0.80 Au | 1.00 Au |
| | 1.50 Au | | | 1.30 Au |
| | 3.00 Au | | | 1.50 Au |



F1
1.50 HTK

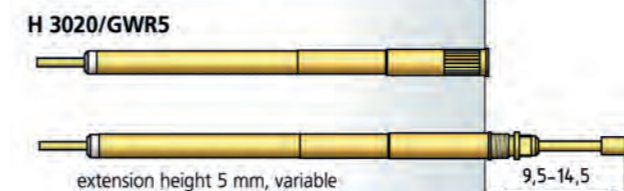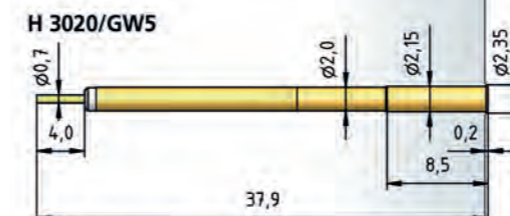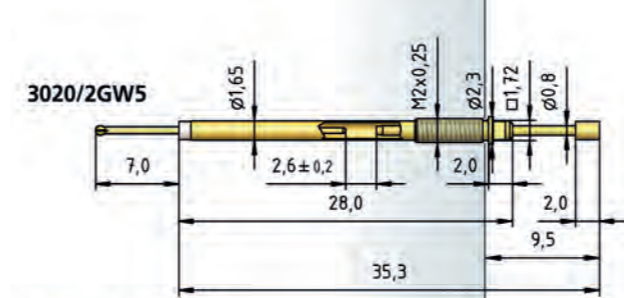

extension height 5 mm, variable

BENEFIT

- Switching test probe for the cable harness test and presence verification
- Easy-replacement system (replacement without soldering)
- Switching test probe „Closer“ (NO) type
- Variable extension height
- Switching travel 4.0 mm on request
- High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|--------------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.30 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 2.60 mm |
| Pre-Loaded Spring Force | 0.15/ 0.40/ 0.50/ 1.70 N |
| Spring Force at Working Travel | 0.80/ 1.50/ 3.00/ 6.50 N |
| Spring Force at Switching Travel | 0.25/ 0.80/ 1.80/ 4.50 N |

ELECTRICAL DATA

Receptacle-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

Pin-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.15 mm |
| HGW 2372 (Glass filled material) | 2.16 mm |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|--------------------------|------------|
| WFS 1021/G-2.54-1.8 | 1.8 |
| WFS 1021/G-2.54-2.0 | 2.0 |
| WFS 1021/G-3.5-3.0-Z | 3.0 |
| WFS 1021/G-C2S-3.0-2.5-Z | 2.5 |

HOW TO ORDER

3020/ 2 G W 5 - F - 1.5 N - Au - 1.5
1 2 3 4 5 6 7 8 9

1 Series 2 Collar Height 3 Threaded Design 4 Interchangeable without Soldering 5 Adjustment Area of the Extension Height 6 Tip Style 7 Spring Force 8 Tip Plating 9 Tip Diameter

Series 3023/2GS

Switching Test Probe „Closer“ (NO) with Easy-Replacement System
100 mil / 2.54 mm

BENEFIT

- Switching test probe for the cable harness test and presence verification
- Easy-replacement system (replacement without soldering)
- Switching test probe „Closer“ (NO) type
- Variable extension height
- High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|--------------------------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 1.50 mm |
| Pre-Loaded Spring Force | 0.12/ 0.30/ 0.40/ 0.80/ 0.80/ 1.40 N |
| Spring Force at Working Travel | 0.85/ 1.35/ 2.00/ 3.00/ 3.50/ 6.50 N |
| Spring Force at Switching Travel | 0.20/ 0.50/ 0.80/ 1.45/ 1.60/ 3.10 N |

ELECTRICAL DATA

Receptacle-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

Pin-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.00 mm |
| HGW 2372 (Glass filled material) | 2.01 mm |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|--------------------------|------------|
| WFS 1021/G-2.54-1.8 | 1.8 |
| WFS 1021/G-2.54-2.0 | 2.0 |
| WFS 1021/G-3.5-3.0-Z | 3.0 |
| WFS 1021/G-C2S-3.0-2.5-Z | 2.5 |

HOW TO ORDER

3023/ 2 G S - F - 3.5 N - Au - 1.8

1 Series 2 Collar Height 3 Threaded Design 4 Plug-in Connector 5 Tip Style 6 Spring Force 7 Tip Plating 8 Tip Diameter

TIP STYLE · DIAMETER · PLATING




| A | C | CL | D | DL |
|---------|---------|---------|---------|---------|
| 1.80 Au | 1.00 Au | 1.00 Au | 1.00 Au | 1.00 Au |
| | 1.30 Au | 1.40 Au | | |
| | 1.50 Au | 1.80 Au | | |
| | 1.80 Au | | | |
| | 2.00 Au | | | |
| | 2.30 Au | | | |



| D1 | F | F | F | F1 |
|---------|---------|---------|---------|-------------|
| 0.64 Au | 0.64 Au | 0.70 Au | 1.80 Au | 1.80 Au/HTK |
| | | 0.80 Au | | 2.30 Au/HTK |
| | | 1.00 Au | | |



| |
|---------|
| FL |
| 1.00 Au |

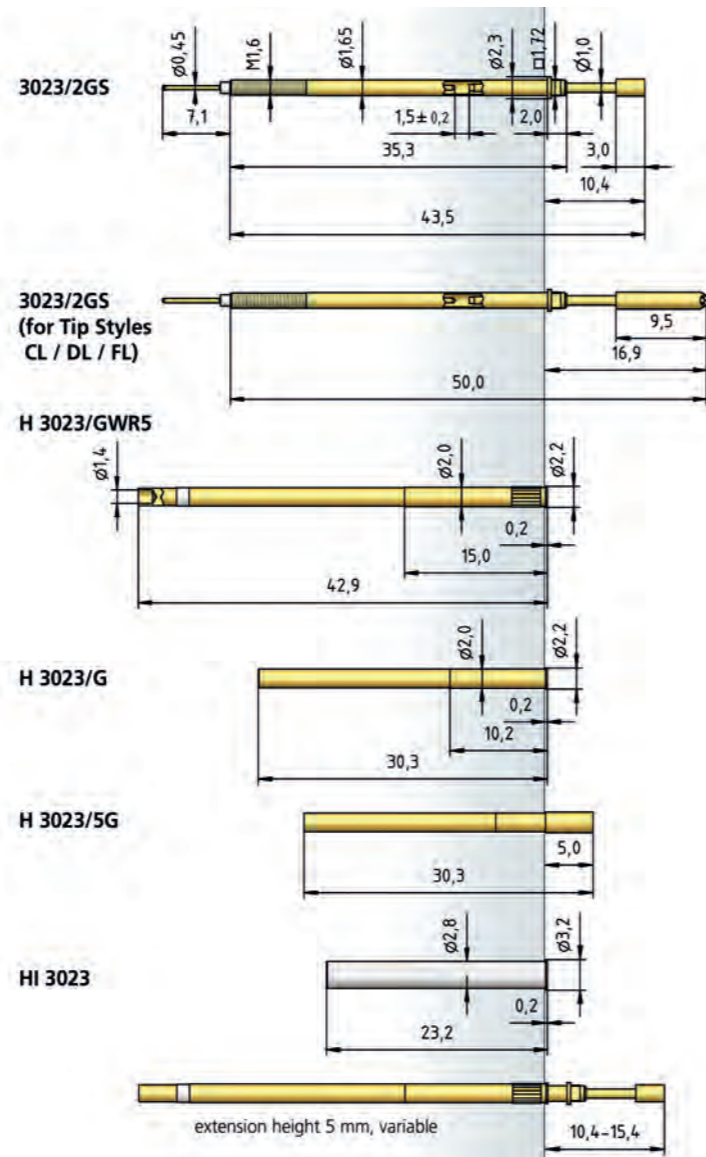


Switching Test Probe „Closer“ (NO) with Easy-Replacement System
100 mil / 2.54 mm

TIP STYLE · DIAMETER · PLATING



| C | D | F | F1 | FS1 |
|----------|----------|----------|----------|------------|
| 1.80C Au | 1.00C Au | 1.00C Au | 1.80 HTK | 2.00C Ni/S |

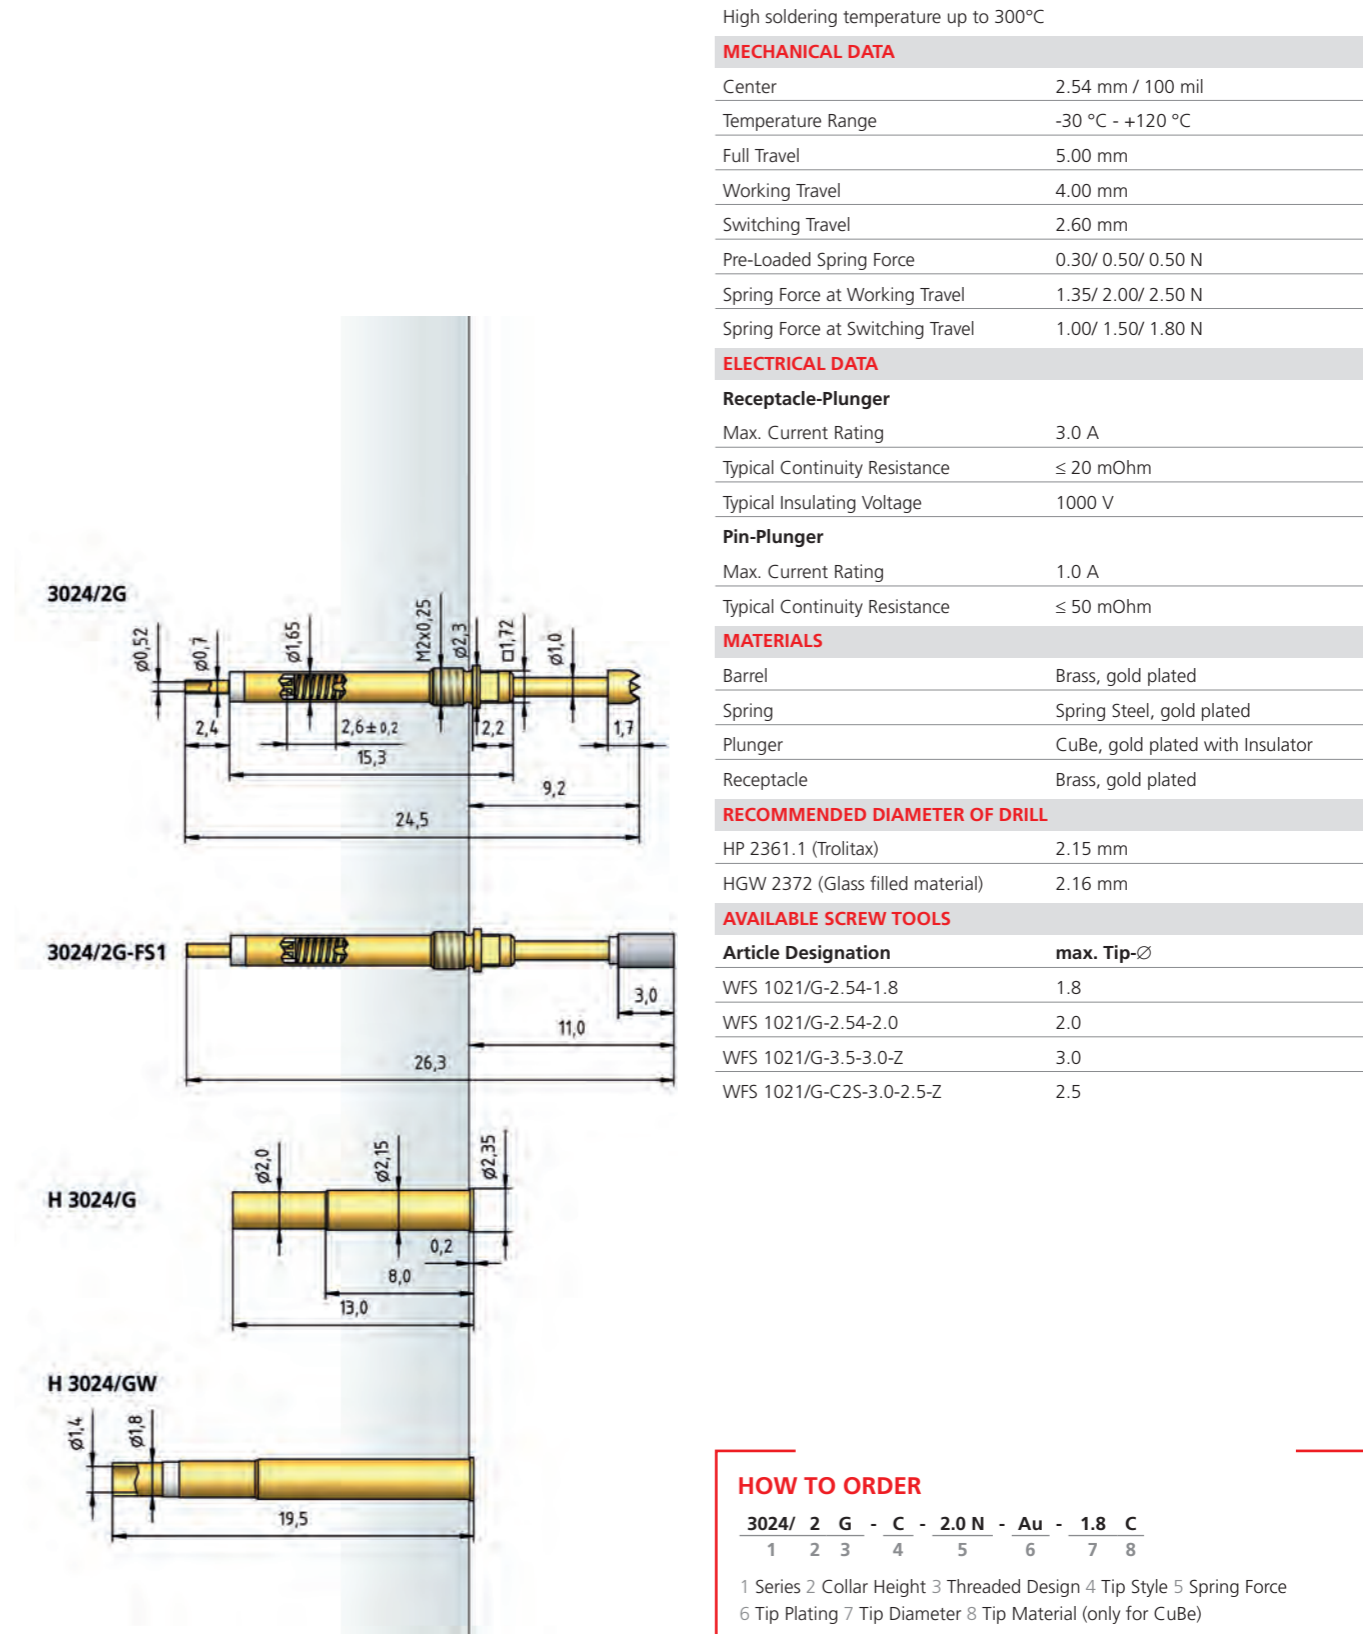

BENEFIT

- Switching test probe for the cable harness test and presence verification
- Available without thread (see page 125)
- Easy-replacement system (replacement without soldering)
- Switching test probe „Closer“ (NO) type
- Short design
- High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|--------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 2.60 mm |
| Pre-Loaded Spring Force | 0.30/ 0.50/ 0.50 N |
| Spring Force at Working Travel | 1.35/ 2.00/ 2.50 N |
| Spring Force at Switching Travel | 1.00/ 1.50/ 1.80 N |

ELECTRICAL DATA

Receptacle-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |
| Typical Insulating Voltage | 1000 V |

Pin-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |

MATERIALS

| | |
|------------|----------------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe, gold plated with Insulator |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.15 mm |
| HGW 2372 (Glass filled material) | 2.16 mm |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|--------------------------|------------|
| WFS 1021/G-2.54-1.8 | 1.8 |
| WFS 1021/G-2.54-2.0 | 2.0 |
| WFS 1021/G-3.5-3.0-Z | 3.0 |
| WFS 1021/G-C2S-3.0-2.5-Z | 2.5 |

HOW TO ORDER

3024/ 2 G - C - 2.0 N - Au - 1.8 C

1 Series 2 Collar Height 3 Threaded Design 4 Tip Style 5 Spring Force 6 Tip Plating 7 Tip Diameter 8 Tip Material (only for CuBe)

Series 3030/GW3

Switching Test Probe „Closer“ (NO) with Easy-Replacement System
100 mil / 2.54 mm

BENEFIT

- Switching test probe for the cable harness test and presence verification
- Available without thread (see page 128)
- Easy-replacement system (replacement without soldering)
- Switching test probe „Closer“ (NO) type
- High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|-------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 6.30 mm |
| Working Travel | 5.00 mm |
| Switching Travel | 4.00 mm |
| Pre-Loaded Spring Force | 0.30 N |
| Spring Force at Working Travel | 2.00 N |
| Spring Force at Switching Travel | 1.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.65 mm |
| with pressed-in Ring | 1.75 mm |
| HGW 2372 (Glass filled material) | 1.67 mm |
| with pressed-in Ring | 1.67 mm |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 1015/G-2.54-1.5 | 1.5 |
| WFS 1015/G-2.54-1.8 | 1.8 |

HOW TO ORDER

3030/ G W 3 - F - 2.0 N - Au - 1.0
1 2 3 4 5 6 7 8

1 Series 2 Threaded Design 3 Interchangeable without Soldering 4 Adjustment Area of the Extension Height 5 Tip Style 6 Spring Force 7 Tip Plating 8 Tip Diameter


TIP STYLE · DIAMETER · PLATING



| C | D | D1 | DL | F |
|---------|---------|---------|---------|---------|
| 1.00 Au | 0.65 Au | 0.61 Au | 0.65 Au | 1.00 Au |
| 1.30 Au | | | | |



| FL |
|---------|
| 0.70 Au |

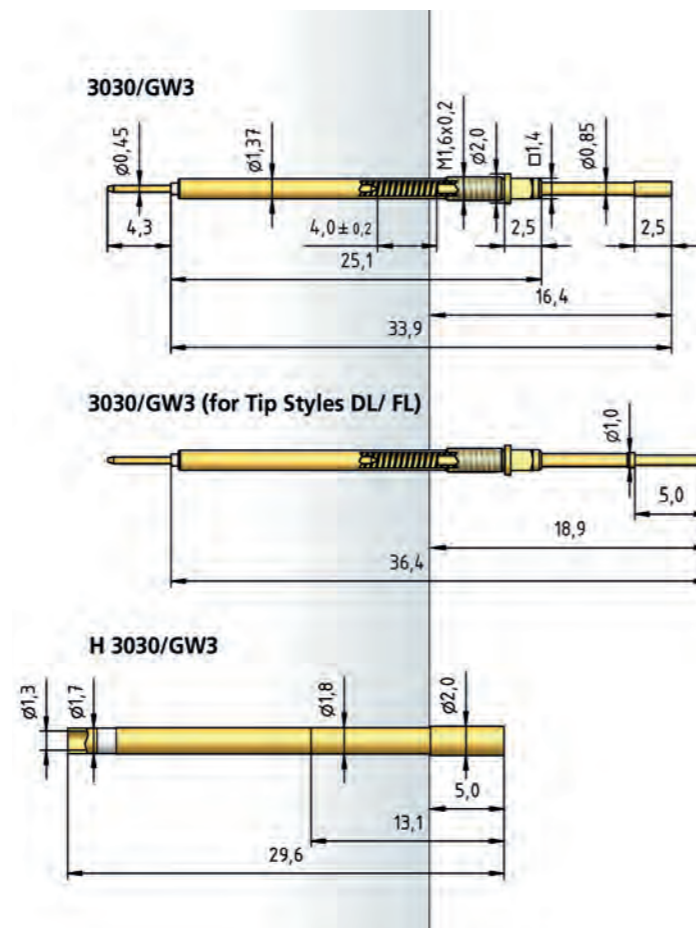

Switching Test Probe „Closer“ (NO) with Easy-Replacement System
138 mil / 3.5 mm

Series 3012/2GS


TIP STYLE · DIAMETER · PLATING



| C | CK | CL | C5 | F |
|----------|----------|----------|---------|----------|
| 3.00C Au | 2.27C Au | 2.30C Au | 1.00 Au | 3.00C Au |
| 4.00C Au | | 3.00C Au | | 3.50C Au |
| | | | | 4.00C Au |
| | | | | 4.50C Au |
| | | | | 5.00C Au |
| | | | | 5.50C Au |
| | | | | 5.90C Au |



| FL | F1 | F1L |
|----------|----------|----------|
| 3.00C Au | 2.30 HTK | 3.00 HTK |
| 3.50C Au | 3.00 HTK | 3.50 HTK |
| 4.00C Au | 3.50 HTK | 4.00 HTK |
| 4.50C Au | 4.00 HTK | 4.50 HTK |
| | 4.50 HTK | 5.00 HTK |
| | 5.00 HTK | 5.50 HTK |
| | 5.50 HTK | 5.90 HTK |
| | | 5.90 HTK |

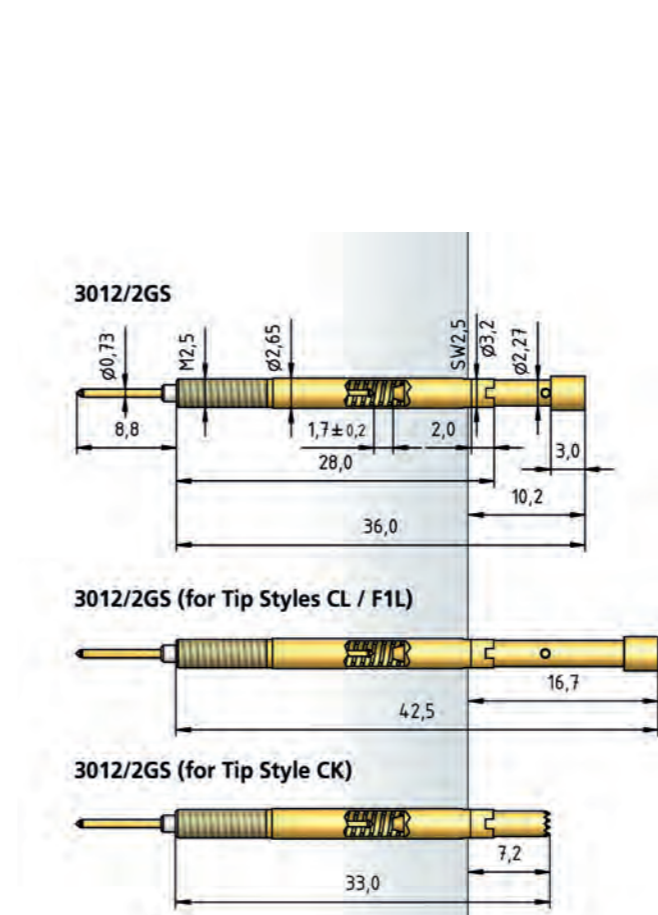

BENEFIT

- Switching test probe for the cable harness test and presence verification
- Easy-replacement system (replacement without soldering)
- Switching test probe „Closer“ (NO) type
- Variable extension height
- Version for large tip diameters
- Switching travel 4.0 mm on request
- High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|---|
| Center | 3.50 mm / 138 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 4.20 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 1.70 mm |
| Pre-Loaded Spring Force | 0.12/ 0.25/ 0.30/ 0.40/ 0.60/ 1.80/ 1.40/ 1.70/ 2.00/ 2.70/ 2.00/ 5.00/ 4.00 N |
| Spring Force at Working Travel | 0.75/ 1.25/ 1.80/ 2.30/ 3.50/ 6.50/ 7.00/ 8.50/ 9.00/ 9.50/ 10.00/ 12.50/ 13.00 N |
| Spring Force at Switching Travel | 0.20/ 0.45/ 0.75/ 1.00/ 1.60/ 3.60/ 3.60/ 4.40/ 4.80/ 5.40/ 5.20/ 8.00/ 7.60 N |

ELECTRICAL DATA

| Receptacle-Plunger | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 15 mOhm |
| Pin-Plunger | |
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel, CuBe |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| H 3011/GWR5 (/R /RK) | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.02 mm |
| HGW 2372 (Glass filled material) | 3.04 mm |
| H 3011/K (/5K) | |
| HP 2361.1 (Trolitax) | 3.01 mm |
| HGW 2372 (Glass filled material) | 3.02 mm |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|--|------------|
| Screwdriver for Slotted Screws 1.8 x 0.5 | all |
| WFS 3012-4.0-2.6 | 2.6 |

Receptacles see page 144

HOW TO ORDER

3012/ 2 G S - F - 1.8 N - Au - 3.0 C
1 2 3 4 5 6 7 8 9

1 Series 2 Collar Height 3 Threaded Design 4 Plug-in Connector 5 Tip Style 6 Spring Force 7 Tip Plating 8 Tip Diameter 9 Tip Material (only for CuBe)

Series 3012/2GS • FS1/FLS1

Switching Test Probe „Closer“ (NO) with Easy-Replacement System
138 mil / 3.5 mm

BENEFIT

- Switching test probe for the cable harness test and presence verification
- Easy-replacement system (replacement without soldering)
- Switching test probe „Closer“ (NO) type
- Variable extension height
- Version for large tip diameters
- Tips insulated
- Switching travel 4.0 mm on request
- High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|---|
| Center | 3.50 mm / 138 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 4.50 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 1.70 mm |
| Pre-Loaded Spring Force | 0.12/ 0.25/ 0.30/ 0.40/ 0.60/ 1.80/ 1.40/ 1.70/ 2.00/ 2.70/ 2.00/ 5.00/ 4.00 N |
| Spring Force at Working Travel | 0.75/ 1.25/ 1.80/ 2.30/ 3.50/ 6.50/ 7.00/ 8.50/ 9.00/ 9.50/ 10.00/ 12.50/ 13.00 N |
| Spring Force at Switching Travel | 0.20/ 0.45/ 0.75/ 1.00/ 1.60/ 3.60/ 3.60/ 4.40/ 4.80/ 5.40/ 5.20/ 8.00/ 7.60 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Receptacle-Plunger | |
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 15 mOhm |
| Pin-Plunger | |
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe, gold plated |
| Tip | CuBe, passiviert |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| H 3011/GWR5 (/R /RK) | |
| HP 2361.1 (Trolitax) | 3.02 mm |
| HGW 2372 (Glass filled material) | 3.04 mm |
| H 3011/K (/5K) | |
| HP 2361.1 (Trolitax) | 3.01 mm |
| HGW 2372 (Glass filled material) | 3.02 mm |

AVAILABLE SCREW TOOLS

| | |
|--|-------------------|
| Article Designation | max. Tip-∅ |
| Screwdriver for Slotted Screws 1.8 x 0.5 | all |

HOW TO ORDER




3012/ 2 G S - FS1 - 3.0 N - Au/CB - 3.0 C
1 2 3 4 5 6 7 8 9

1 Series 2 Collar Height 3 Threaded Design 4 Plug-in Connector 5 Tip Style
6 Spring Force 7 Tip Plating 8 Tip Diameter 9 Tip Material (only for CuBe)

TIP STYLE · DIAMETER · PLATING



| | |
|-------------|-------------|
| FS1 | FLS1 |
| 3.00C Au/CB | 3.00C Au/CB |
| 3.50C Au/CB | 3.50C Au/CB |
| 4.00C Au/CB | 4.50C Au/CB |
| 4.50C Au/CB | 5.00C Au/CB |
| 5.00C Au/CB | |
| 5.50C Au/CB | |
| 5.90C Au/CB | |

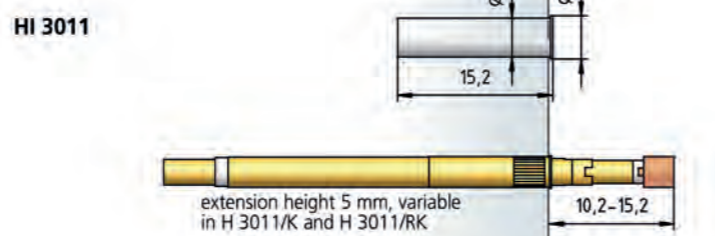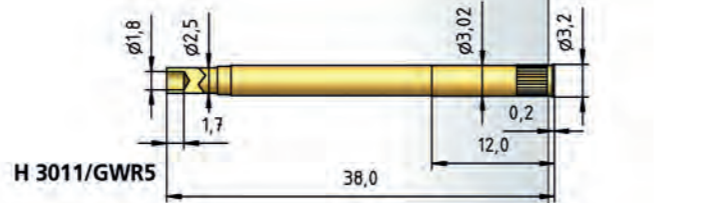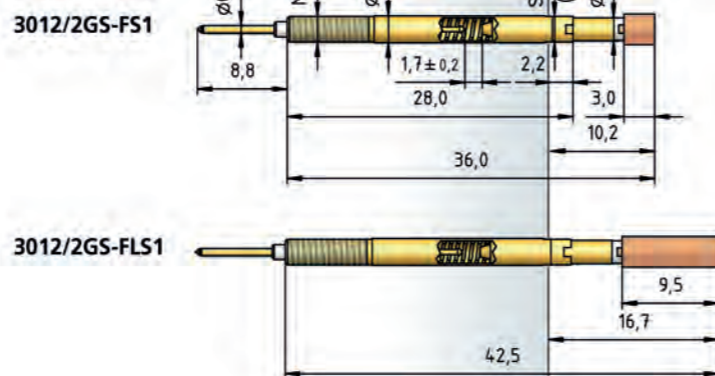


Switching Test Probe „Closer“ (NO) 160 mil / 4.0 mm

TIP STYLE · DIAMETER · PLATING


9 Connector Pin Length








| | | | | |
|----------|----------|-------------------------------|-----------|-----------|
| A | C | C | CL | C1 |
| 2.30 Au | 1.80 Au | 2.30 Au 3.00 Au 4.00 Au | 2.30 Au | 1.00 Au |



| | | | | |
|------------|------------|------------|-----------|----------|
| CL1 | CL2 | CL3 | D6 | F |
| 1.00 Au | 1.80 Au | 1.00 Au | 1.00 Au | 1.80 Au |



| | | | |
|--------------------|--|------------|-----------|
| F | F1 | FL3 | H2 |
| 2.00 Au 2.30 Au | 2.30 HTK 3.00 HTK 4.00 HTK 5.00 HTK | 1.00 Au | 2.60 Au |

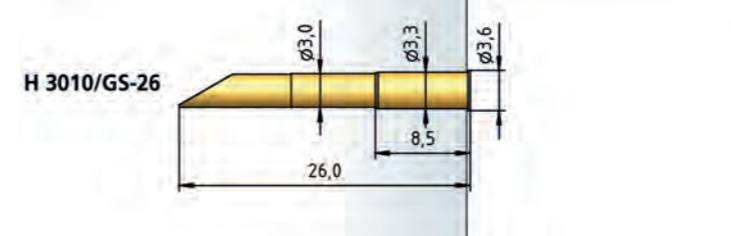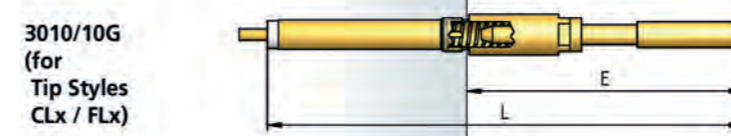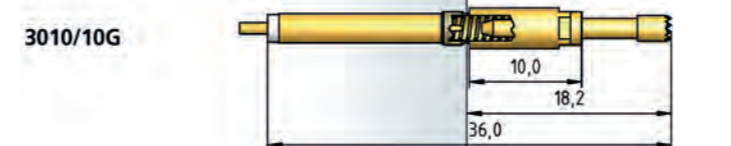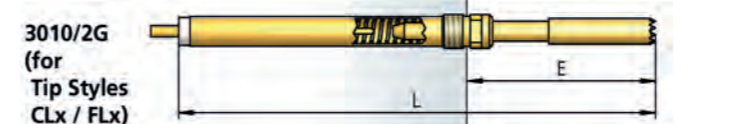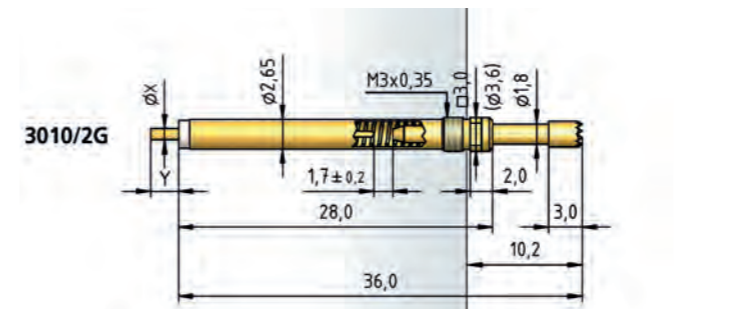

BENEFIT

- Switching test probe for the cable harness test and presence verification
- Available without thread (see page 130)
- Switching travel 4.0 mm on request
- High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|--|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 1.70 mm |
| Pre-Loaded Spring Force | 0.12/ 0.30/ 1.80/ 1.70/ 2.70/ 5.00 N |
| Spring Force at Working Travel | 1.25/ 2.30/ 7.00/ 9.00/ 10.00/ 13.00 N |
| Spring Force at Switching Travel | 0.18/ 0.70/ 3.60/ 4.40/ 5.40/ 8.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Receptacle-Plunger | |
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 15 mOhm |
| Pin-Plunger | |
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.28 mm |
| HGW 2372 (Glass filled material) | 3.29 mm |

AVAILABLE SCREW TOOLS

See page 145

TABLE CONNECTOR PIN

| | |
|-------------------------------|------------------------------------|
| Connector Pin ∅ X (mm) | Connector Pin Length Y (mm) |
| 0.5 | 6.0 |
| 1.0 | 2.5 |
| 1.0 | 4.0 |

LENGTHS FOR TEST PROBE 3010/2G FOR TIP STYLES CLx / FLx

| | | |
|------------------|---------------|---------------|
| Tip Style | E (mm) | L (mm) |
| CL, CL1 | 16.7 | 42.5 |
| CL2 | 22.2 | 48.0 |
| CL3, FL3 | 22.9 | 48.7 |

LENGTHS FOR TEST PROBE 3010/10G FOR TIP STYLES CLx / FLx

| | | |
|------------------|---------------|---------------|
| Tip Style | E (mm) | L (mm) |
| CL, CL1 | 24.7 | 42.5 |
| CL2 | 30.2 | 48.0 |
| CL3, FL3 | 30.9 | 48.7 |

HOW TO ORDER

3010/ 2 G - A - 2.3 N - Au - 2.3 /1.0x 4.0
1 2 3 4 5 6 7 8 9

1 Series 2 Collar Height 3 Threaded Design 4 Tip Style 5 Spring Force
6 Tip Plating 7 Tip Diameter 8 Connector Pin Diameter

Series 3011/2FGS

Switching Test Probe "Opener" (NC) with Easy-Replacement System
160 mil / 4.0 mm

BENEFIT

- Switching test probe for the cable harness test and presence verification
- Easy-replacement system (replacement without soldering)
- Switching test probe "Opener" (NC) type
- Variable extension height
- High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|--|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 1.70 mm |
| Pre-Loaded Spring Force | 0.12/ 0.25/ 0.30/ 0.40/ 0.60/ 1.80/ 1.40/ 1.70/ 2.00/ 2.70/ 2.00/ 5.00/ 4.00 N |
| Spring Force at Working Travel | 0.75/ 1.25/ 1.80/ 2.30/ 3.50/ 6.50/ 7.00/ 8.50/ 9.00/ 9.50/ 10.00/ 12.50/ 13.00 N |
| Spring Force at Switching Travel | 0.20/ 0.45/ 0.75/ 1.00/ 1.60/ 3.60/ 4.40/ 4.80/ 5.40/ 5.20/ 8.00/ 7.60 N |

ELECTRICAL DATA

Receptacle-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 15 mOhm |

Pin-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

H 3011/GWR5 (/R /RK)

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.02 mm |
| HGW 2372 (Glass filled material) | 3.04 mm |

H 3011/K (/5K)

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.01 mm |
| HGW 2372 (Glass filled material) | 3.02 mm |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 1060/G-4.0-3.0 | 3.0 |

HOW TO ORDER

3011/ 2 F G S - C - 1.8 N - Au - 2.3
1 2 3 4 5 6 7 8 9


1 Series 2 Collar Height 3 Type Opener 4 Threaded Design
5 Plug-in Connector 6 Tip Style 7 Spring Force 8 Tip Plating 9 Tip Diameter

TIP STYLE · DIAMETER · PLATING



C

2.30 Au

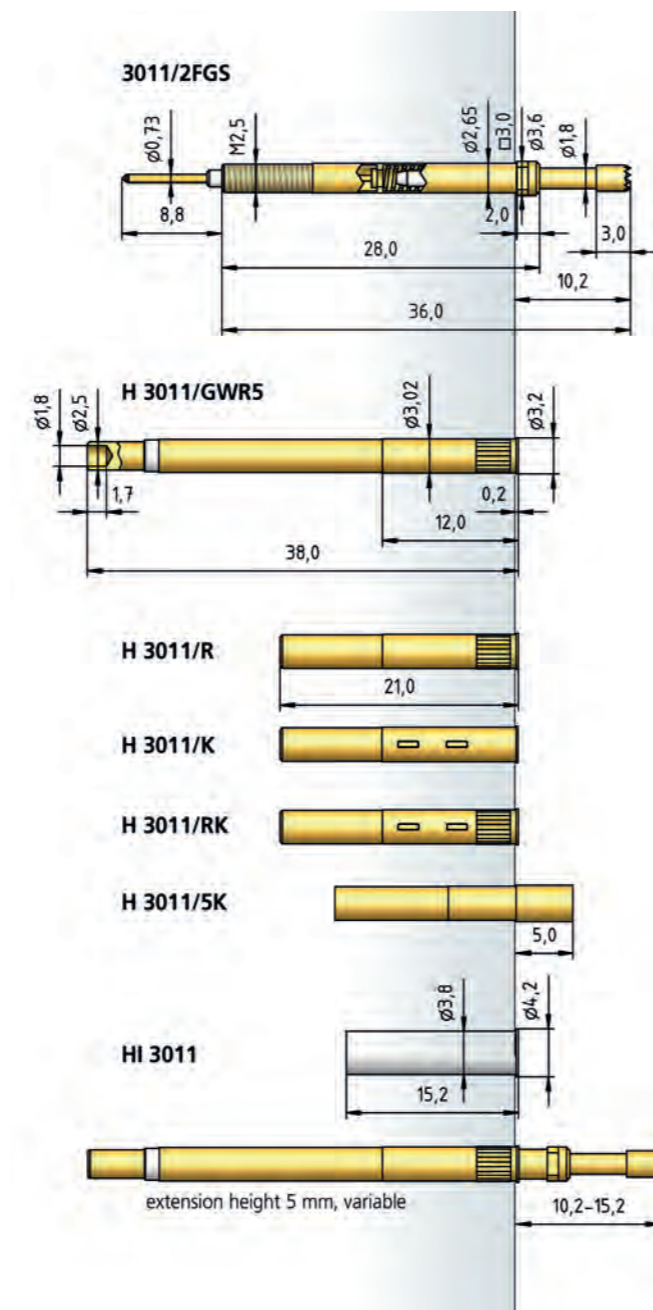

Switching Test Probe „Closer“ (NO) with Easy-Replacement System
160 mil / 4.0 mm

Series 3014/2G

TIP STYLE · DIAMETER · PLATING



A

C

C

F

F

3.00C Au

1.00C Au

2.00C Au
3.00C Au


1.00C Au

2.00C Au
3.00C Au



F1

2.00 HTK
3.00 HTK

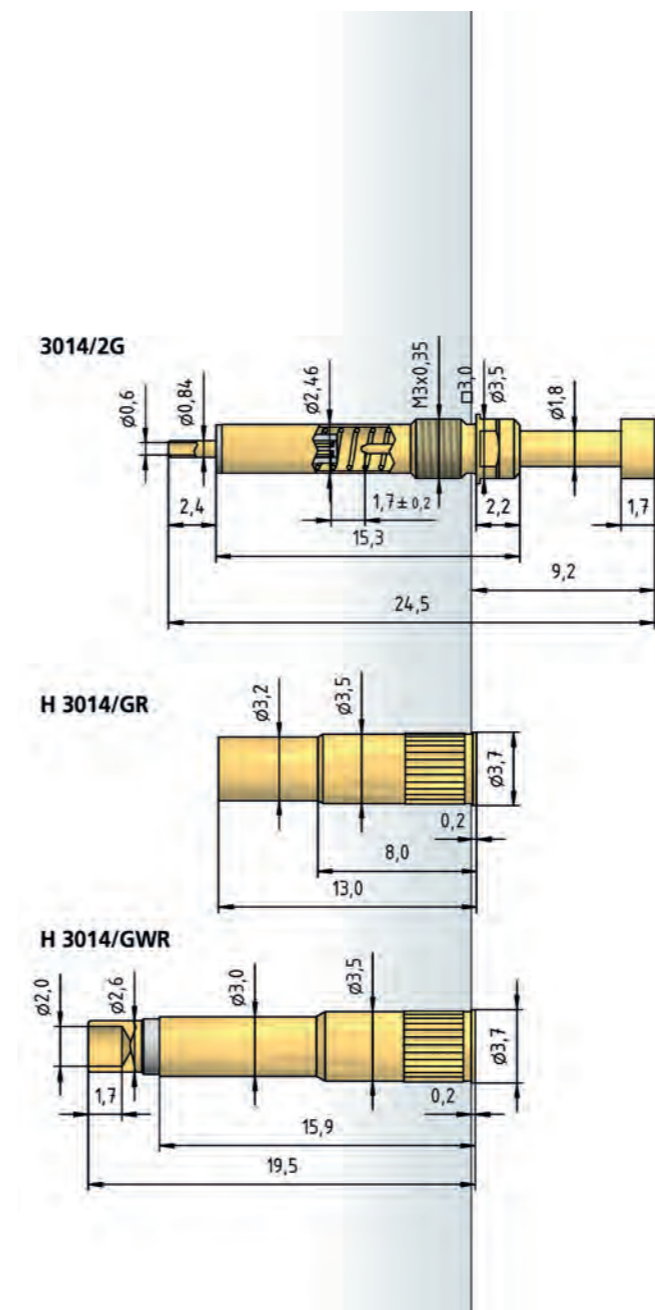

BENEFIT

- Switching test probe for the cable harness test and presence verification
- Easy-replacement system (replacement without soldering)
- Switching test probe „Closer“ (NO) type
- Short design
- High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|----------------------------------|-------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 1.70 mm |
| Pre-Loaded Spring Force | 0.50 N |
| Spring Force at Working Travel | 1.50 N |
| Spring Force at Switching Travel | 0.90 N |

ELECTRICAL DATA

Receptacle-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

Pin-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 40 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.50 mm |
| HGW 2372 (Glass filled material) | 3.51 mm |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|----------------------|------------|
| WFS 1060/G-4.0-3.0 | 3.0 |
| WFS 1060/G-5.0-4.0-Z | 4.0 |
| WFS 1060/G-6.0-5.0-Z | 5.0 |

HOW TO ORDER

3014/ 2 G - A - 1.5 N - Au - 3.0 C
1 2 3 4 5 6 7 8

1 Series 2 Collar Height 3 Threaded Design 4 Tip Style 5 Spring Force
6 Tip Plating 7 Tip Diameter 8 Tip Material (only for CuBe)

NEW Series 3214/2GW

Switching Test Probe „OFF-ON-OFF“ with Easy-Replacement System
160 mil / 4.0 mm

BENEFIT

- Switching test probe for the cable harness test and presence verification
- Easy-replacement system (replacement without soldering)
- Switching test probe "OFF-ON-OFF" type
- Short design
- High soldering temperature up to 300°C

MECHANICAL DATA

| | |
|--------------------------------------|-------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 3.00 mm |
| Rated Travel | 4.00 mm |
| Switching Travel ON | 2.50 mm |
| Switching Travel OFF | 3.50 mm |
| Pre-Loaded Spring Force | 1.00 N |
| Spring Force at Working Travel | 2.50 N |
| Spring Force at Rated Travel | 3.00 N |
| Spring Force at Switching Travel ON | 2.25 N |
| Spring Force at Switching Travel OFF | 2.75 N |

ELECTRICAL DATA

Receptacle-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

Pin-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 40 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe |
| Receptacle | Brass, gold plated |


RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.50 mm |
| HGW 2372 (Glass filled material) | 3.51 mm |


AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 1060/G-4.0-3.0 | 3.0 |

TIP STYLE · DIAMETER · PLATING



| C | F |
|----------|----------|
| 2.00C Au | 3.00C Au |

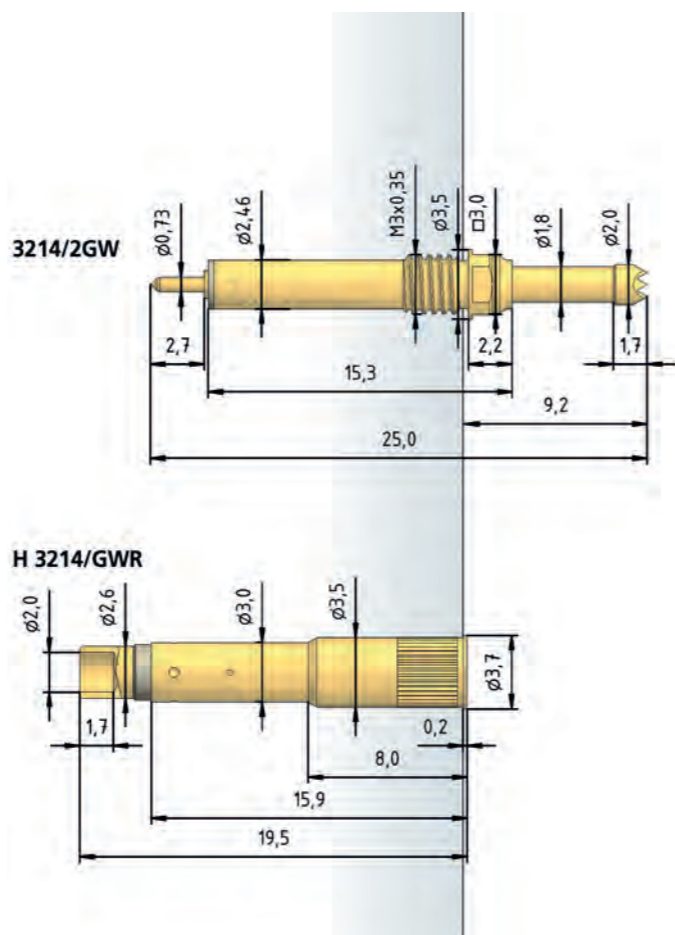

Ball-Head Switching Test Probe „Closer“ (NO) 300 mil / 7.5 mm

Series 3015/G

TIP STYLE · DIAMETER · PLATING



| D |
|---------|
| 4.00 Ni |

BENEFIT

- Ball-head switching test probe for presence detection with side activation
- Threaded type
- Precision ball plunger guide
- Outer housing neutral (insulated of the electrical circuit)

MECHANICAL DATA

| | |
|----------------------------------|-------------------|
| Center | 7.50 mm / 300 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 1.00 mm |
| Working Travel | 0.80 mm |
| Switching Travel | 0.50 mm |
| Pre-Loaded Spring Force | 0.50 N |
| Spring Force at Working Travel | 0.70 N |
| Spring Force at Switching Travel | 0.60 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 25 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS


| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|----------------|
| HP 2361.1 (Trolitax) | 6.75...6.80 mm |
|----------------------|----------------|

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 3015/G-7.0 | 5.0 |

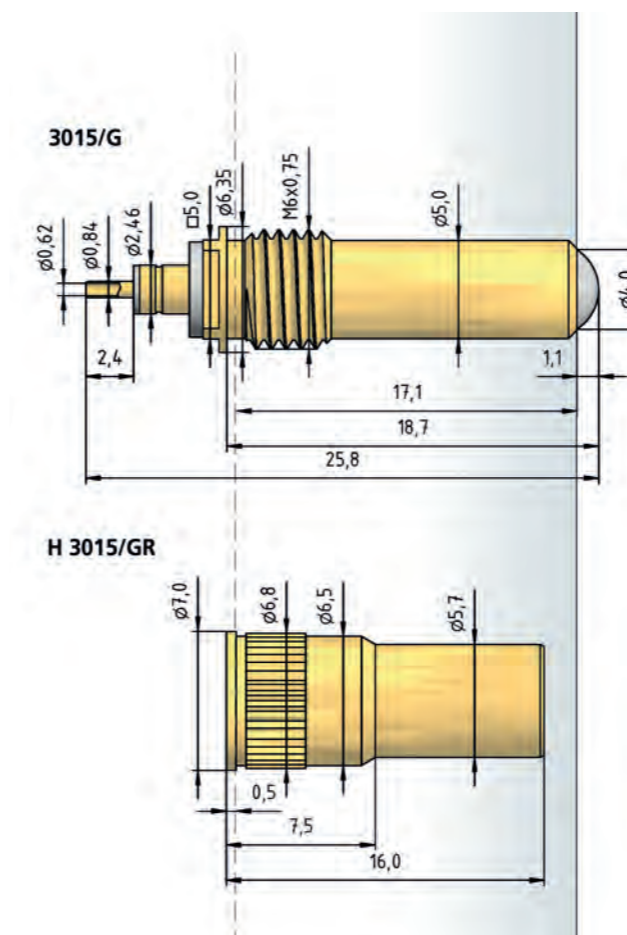

HOW TO ORDER

3214/ 2 GW - C - 3.0 N - Au - 2.0 C
1 2 3 4 5 6 7 8

1 Series 2 Collar Height 3 Threaded Design 4 Tip Style 5 Spring Force
6 Tip Plating 7 Tip Diameter 8 Tip Material (only for CuBe)

HOW TO ORDER

3015/ G - D - 0.7 N - Ni - 4.0
1 2 3 4 5 6

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 Tip Plating
6 Tip Diameter

PUSH-BACK TEST PROBES

Push-Back Test Probes are used for the contacting of connectors when a "catch test" is necessary.

In this case, a defined high force is applied to the stop parts in order to check correct seating inside the connector or to check that the connector is locked in position. All types are designed as switching test probes. Stop parts which are not locked in position are pushed out by the pressure from the connector, and the push-back test probe does not switch or give a signal.

Push-Back Test Probes are available for centers of 4.0 mm and 2.54 mm and with contact pressures of up to 25 N. Series 5104, 5265 and 3028 are especially effective for these uses. Their modular design gives them a wide range of applications. Of course, solder-free replacement of the test probes is an integral part of the easy-replacement system.

| SERIES | CENTER | PAGE |
|---------|-------------------|------|
| 3028.01 | 100 mil / 2.54 mm | 154 |
| 5203 | 100 mil / 2.54 mm | 155 |
| 5265 | 118 mil / 3.00 mm | 156 |
| 5087 | 160 mil / 4.00 mm | 157 |
| 5104 | 160 mil / 4.00 mm | 158 |



Series 3028.01

Push-Back Test Probe, non-rotating 100 mil / 2.54 mm

BENEFIT

Push-back test probe for the cable harness test
Especially suitable for spade-shaped tip style
Non-rotating variant
Receptacle can be extended with switching element optional
Soldering temperature max 300°C

MECHANICAL DATA

| | |
|--|---------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Switching Travel | 2.60 mm |
| Pre-Loaded Spring Force | 1.00/ 2.20/ 4.00 N |
| Spring Force at Switching Travel | 3.10/ 6.80/ 10.70 N |
| Spring Force at Working Travel (without Switching Element) | 4.30/ 9.30/ 14.30 N |
| Spring Force at Working Travel (with Switching Element) | +0.70 N |

ELECTRICAL DATA

Receptacle-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

Pin-Plunger

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 2.10 mm |
| HGW 2372 | 2.11 mm |

AVAILABLE SCREW TOOLS


| Article Designation | max. Tip-∅ |
|--------------------------|------------|
| WFS 1021/G-2.54-1.8 | 1.8 |
| WFS 1021/G-2.54-2.0 | 2.0 |
| WFS 1021/G-3.5-3.0-Z | 3.0 |
| WFS 1021/G-C2S-3.0-2.5-Z | 2.5 |

HOW TO ORDER

3028 .01 - Y - 15.0 N - Au - 1.5x 0.5


1 Series 2 Variant 3 Tip Style 4 Spring Force 5 Tip Plating 6 Tip Diameter 7 Tip Thickness

TIP STYLE · DIAMETER · PLATING




| A | D2 | F | Y | Y3 |
|---------|---------|---------|--------------|--------------|
| 1.50 Au | 0.80 Au | 1.30 Au | 1.50x0.50 Au | 1.50x0.50 Au |
| 2.00 Au | | | | |


3028.01

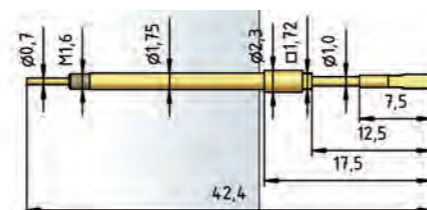


3028.01-D2

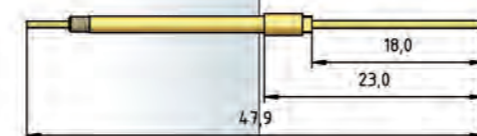


H 3028/VR.01



SEV 3028.01




3028.01 with H 3028.01/VR.01 and SEV 3028.01




Push-Back Test Probe, non-rotating 100 mil / 2.54 mm

TIP STYLE · DIAMETER · PLATING




| A | D | F | Y | Y |
|----------|----------|----------|---------------|---------------|
| 1.90C Au | 1.20C Au | 1.50C Au | 1.90x0.30C Au | 1.90x0.36C Au |
| 2.20C Au | 2.50C Au | 1.80C Au | | |




| Y | Y | Y |
|---------------|---------------|---------------|
| 1.90x0.50C Au | 1.90x0.80C Au | 2.50x0.80C Au |


5203

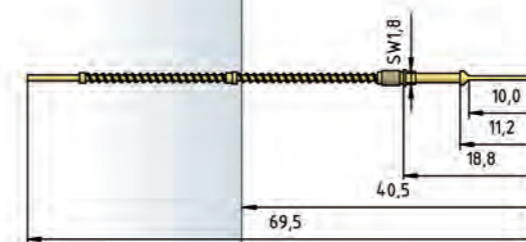


H 5203

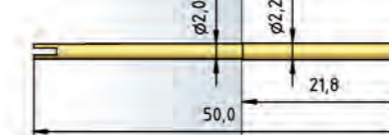

H 5203 L



H 5203/SEV

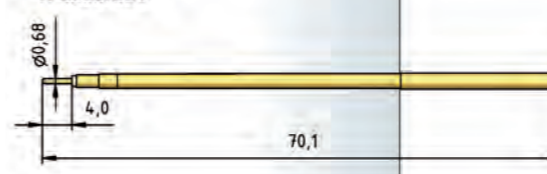

BENEFIT

Push-back test probe for the cable harness test
Especially suitable for spade-shaped tip style
Non-rotating variant
Receptacle with switch function

MECHANICAL DATA

| | |
|--|-------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.50 mm |
| Working Travel | 5.00 mm |
| Switching Travel | 2.50 mm |
| Pre-Loaded Spring Force | 1.20 N |
| Spring Force at Switching Travel | 5.60/ 8.10 N |
| Spring Force at Working Travel (without Switching Element) | 10.00/ 15.00 N |
| Spring Force at Working Travel (with Switching Element) | +0.60 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Spring | Spring Steel, gold plated |
| Plunger | CuBe |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|---|---------|
| HP 2361.1 (Trolitax) | 2.20 mm |
| <i>(Tolerances dependent on carrier material, test drilling is recommended)</i> | |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 5203-2.54-2.0 | 2.0 |
| WFS 5203-3.5-2.7-Z | 2.7 |

HOW TO ORDER

5203 - Y - 10.0 N - Au - 1.9x 0.3 C

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter 6 Tip Thickness 7 Tip Material (only for CuBe)

Series 5265

Push-Back Test Probe, non-rotating 118 mil / 3.0 mm

BENEFIT

Push-back test probe for the cable harness test
Especially suitable for spade-shaped tip style
Non-rotating variant

Receptacle with switch function

MECHANICAL DATA

| | |
|---|-----------------------------|
| Center | 3.00 mm / 118 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.50 mm |
| Working Travel | 5.00 mm |
| Switching Travel | 2.60 mm |
| Pre-Loaded Spring Force | 1.00/ 2.00/ 3.00/ 3.80 N |
| Spring Force at Switching Travel | 3.10/ 6.20/ 9.20/ 12.20 N |
| Spring Force at Working Travel (without Switching Element) | 5.00/ 10.00/ 15.00/ 20.00 N |
| Spring Force at Working Travel (with Switching Element) | +1.00 N |

ELECTRICAL DATA

Barrel-Probe Tip

| | |
|-------------------------------|-----------|
| Max. Current Rating | 8.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

Connector Probe Tip

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---|
| HP 2361.1 (Trolitax) | 2.49...2.51 mm <i>(Tolerances dependent on carrier material, test drilling is recommended)</i> |
|----------------------|---|

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 5265-3.0-2.3 | 2.3 |
| WFS 5265-3.0-2.5-Z | 2.5 |
| WFS 5265-3.5-3.0-Z | 3.0 |
| WFS 5265-4.5-4.0-Z | 4.0 |

HOW TO ORDER

5265 - Y - 15.0 N - Au - 1.9x 0.8 C
1 2 3 4 5 6 7

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 Tip Thickness 7 Tip Material (only for CuBe)

TIP STYLE · DIAMETER · PLATING


| | | | | |
|----------------------------------|--|---------------|---------------|---------------|
| | | | | |
| C | F | Y | Y | Y |
| 2.00C Au 2.70C Au 3.00C Au | 1.50C Au 1.80C Au 2.30C Au 3.00C Au | 1.90x0.50C Au | 1.90x0.80C Au | 2.20x1.20C Au |
| | | | | |
| Y | Y | Y | Y | YL |
| 2.50x0.50C Au | 2.50x0.80C Au | 2.50x1.50C Au | 2.70x0.80C Au | 4.00x0.60C Au |

5265

5265-YL

H 5265

H 5265/SEV

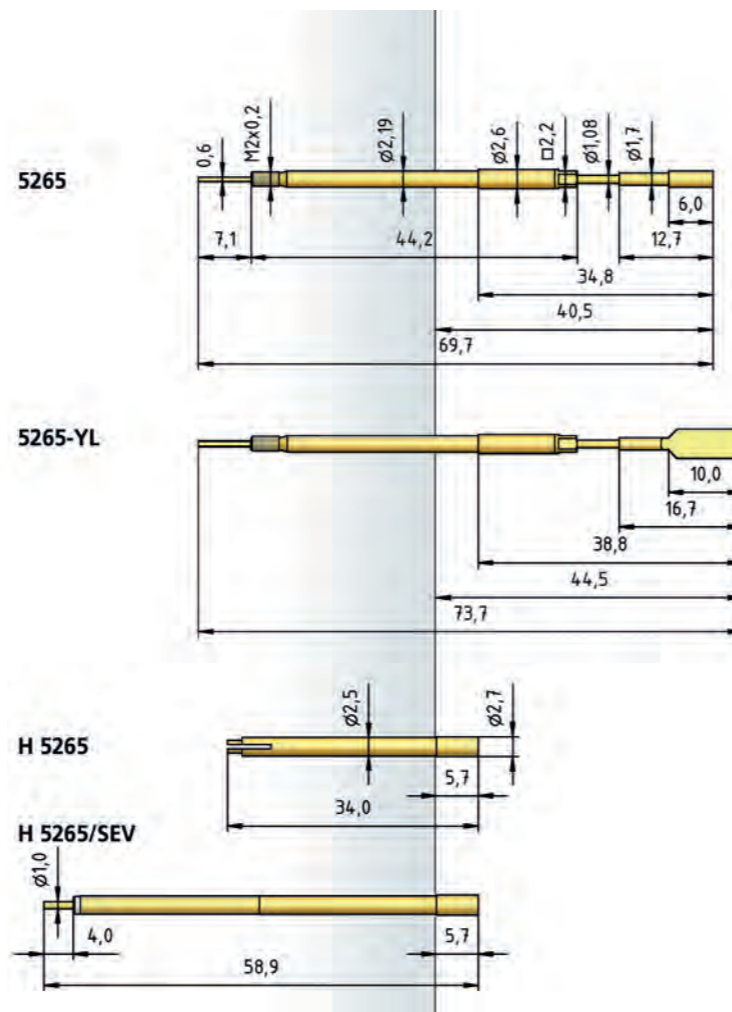

Push-Back Test Probe 160 mil / 4.0 mm

Series 5087


TIP STYLE · DIAMETER · PLATING

| | | | | |
|--|----------------------|----------------------|----------------------------------|----------------------|
| | | | | |
| C | D | D5 | F | F5 |
| 2.30C Au 2.80C Au 3.00C Au 4.00C Au | 1.45C Au | 2.30C Au 3.00C Au | 1.00C Au 1.10C Au 1.40C Au | 1.80C Au 2.30C Au |
| | | | | |
| F | FL | | | |
| 1.80C Au | 1.30C Au 1.80C Au | | | |

5087

5087 (for Tip Style FL)

5087 (for Tip Styles D5 / F5)

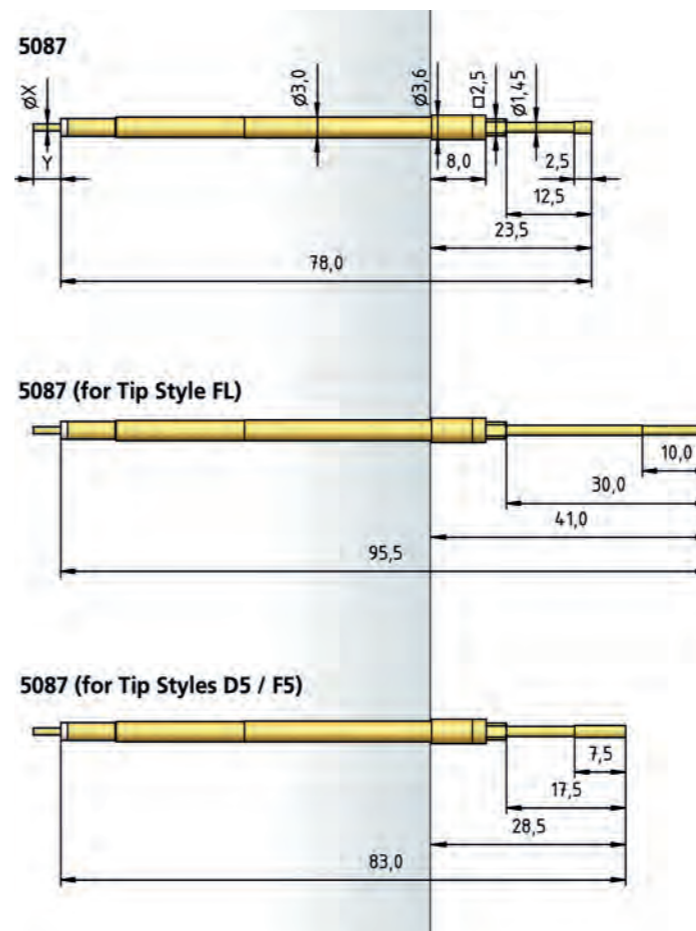

BENEFIT

Push-back test probe for the cable harness test
Suitable when standard head styles are used

MECHANICAL DATA

| | |
|----------------------------------|---------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 10.00 mm |
| Working Travel | 9.50 mm |
| Switching Travel | 7.50 mm |
| Pre-Loaded Spring Force | 1.50/ 2.00/ 4.00 N |
| Spring Force at Working Travel | 6.00/ 9.00/ 15.00 N |
| Spring Force at Switching Travel | 4.30/ 6.80/ 12.00 N |

ELECTRICAL DATA

Barrel-Probe Tip

| | |
|-------------------------------|----------|
| Max. Current Rating | 20.0 A |
| Typical Continuity Resistance | ≤ 3 mOhm |

Connector Probe Tip

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 25 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|---------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|--|
| HP 2361.1 (Trolitax) | 3.00 mm <i>(Tolerances dependent on carrier material, test drilling is recommended)</i> |
|----------------------|--|

TABLE CONNECTOR PIN

| Connector Pin ∅ X (mm) | Connector Pin Length Y (mm) |
|------------------------|-----------------------------|
| 0.5 | 6.0 |
| 1.0 | 2.5 |
| 1.0 | 4.0 |

HOW TO ORDER

5087 - F - 15.0 N - Au - 1.8 C / 1.0x 4.0
1 2 3 4 5 6 7 8

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 Tip Material (only for CuBe) 7 Connector Pin Diameter
8 Connector Pin Length

Series 5104

Push-Back Test Probe, non-rotating 160 mil / 4.0 mm

BENEFIT

Push-back test probe for the cable harness test
Especially suitable for spade-shaped tip style
Non-rotating variant

Receptacle with switch function

MECHANICAL DATA

| | |
|---|--|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 7.00 mm |
| Working Travel | 5.00 mm |
| Switching Travel | 3.50 mm |
| Pre-Loaded Spring Force | 0.50/ 1.00/ 1.50/ 3.00/ 4.00/ 3.00/ 4.50/ 5.00/ 4.00/ 9.00 N |
| Spring Force at Switching Travel | 0.70/ 3.80/ 4.65/ 7.90/ 9.10/ 11.40/ 13.95/ 15.50/ 18.70/ 23.70 N |
| Spring Force at Working Travel (without Switching Element) | 0.75/ 5.00/ 6.00/ 10.00/ 11.25/ 15.00/ 18.00/ 20.00/ 25.00/ 30.00 N |
| Spring Force at Working Travel (with Switching Element) | +0.75 N |

ELECTRICAL DATA

Barrel-Probe Tip

| | |
|-------------------------------|----------|
| Max. Current Rating | 20.0 A |
| Typical Continuity Resistance | ≤ 3 mOhm |

Connector Probe Tip

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |
| Typical Insulating Voltage | 1000 V |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 3.50 mm |
|----------------------|---------|

(Tolerances dependent on carrier material, test drilling is recommended)

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|----------------------|------------|
| WFS 1060/G-4.0-3.0 | 3.0 |
| WFS 1060/G-5.0-4.0-Z | 4.0 |
| WFS 1060/G-6.0-5.0-Z | 5.0 |

TABLE CONNECTOR PIN

| Connector Pin ∅ X (mm) | Connector Pin Length Y (mm) |
|------------------------|-----------------------------|
| 0.5 | 6.0 |
| 0.7 | 7.0 |
| 1.0 | 2.5 |
| 1.0 | 4.0 |

HOW TO ORDER


5104 - Y - 15.75 N - Au - 2.2x 1.6 /1.0x4.0
1 2 3 4 5 6 7

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 Tip Thickness 7 Complete with Switching Element


TIP STYLE · DIAMETER · PLATING




| A | C | D | F | F |
|---------|---------|---------|---------|---------|
| 2.50 Au | 2.40 Au | 1.75 Au | 1.80 Au | 1.40 Au |
| 3.00 Au | 3.00 Au | 1.80 Au | 1.80 Au | 2.00 Au |
| 4.00 Au | 4.00 Au | 2.00 Au | 3.00 Au | |
| | 4.80 Au | 2.30 Au | 4.00 Au | |
| | | 3.00 Au | | |
| | | 3.70 Au | | |







| Y | Y | Y | Y | Y |
|----------------|----------------|----------------|----------------|----------------|
| 2.00 x 0.80 Au | 2.20 x 1.30 Au | 2.20 x 1.60 Au | 2.25 x 1.40 Au | 2.25 x 1.80 Au |



| Y | Y | Y | Y1 | Y1 |
|----------------|----------------|----------------|----------------|----------------|
| 2.50 x 0.60 Au | 2.50 x 0.80 Au | 3.20 x 0.50 Au | 3.00 x 0.80 Au | 3.00 x 1.60 Au |



| Y2 | Y4 | Y21 | Y95 | Y95 |
|----------------|----------------|----------------|----------------|----------------|
| 2.50 x 0.80 Au | 2.90 x 0.74 Au | 2.50 x 0.80 Au | 3.00 x 1.80 Au | 5.50 x 1.80 Au |

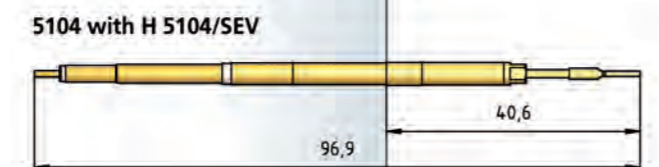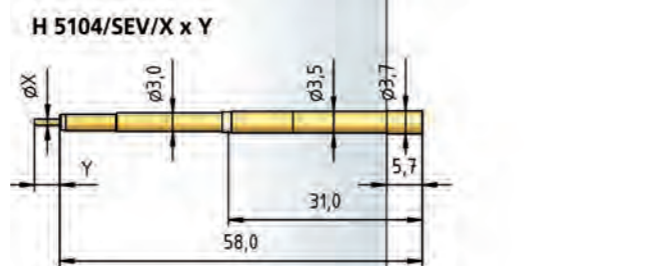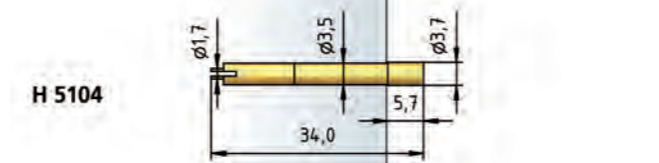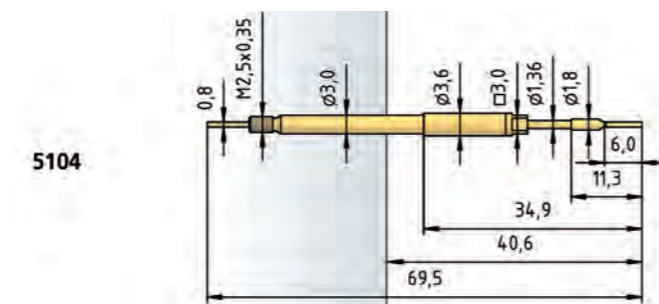

HIGH-CURRENT TEST PROBES

High-Current Test Probes are used when higher currents are involved.

Thanks to their compact design, these series are available for centers of 2.54 mm to 5.0 mm with a large number of different tip styles. Alternatively, all series are available in a threaded type which ensures an excellent fit in the receptacle.

Based on PTR's standard sizes, the high-current types are fitted with a split plunger. During contacting, both parts of the plunger are pressed against each other and, as a result, against the barrel wall. The resulting increased contact with the barrel wall and the overall greater contact surface mean that the test probe can be subjected to higher currents, depending on the series, of 16 A up to 100 A. High-Current Test Probes can be used even when very low and constant resistance values are required.

| SERIES | CENTER | PAGE |
|-----------------|-------------------|------|
| 1021 · 1021/G | 100 mil / 2.54 mm | 162 |
| 5310/G | 100 mil / 2.54 mm | 163 |
| 5110/S · 5110/G | 160 mil / 4.00 mm | 164 |
| 1060 · 1060/G | 160 mil / 4.00 mm | 165 |
| 1075 · 1075/G | 197 mil / 5.00 mm | 166 |
| 1080/G | 300 mil / 7.60 mm | 167 |



Series 1021 • 1021/G

High-Current Test Probe 100 mil / 2.54 mm

High-Current Test Probe 100 mil / 2.54 mm

Series 5310/G NEW

BENEFIT

For use in burn-in and run-in test
Transmission of high currents
Low contact resistance

MECHANICAL DATA

| | |
|--------------------------------|-------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.30 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 0.70 N |
| Spring Force at Working Travel | 3.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 16.0 A |
| Typical Continuity Resistance | ≤ 10 mOhm |

MATERIALS

| | |
|------------|--|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, Stainless Steel, gold plated |
| Plunger | CuBe, gold plated/Silver Cap |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

H 1021 L

| | |
|----------------------|----------------|
| HP 2361.1 (Trolitax) | 1.98...2.00 mm |
| HGW 2372 | 1.98...2.01 mm |

H 1021(5)GR(V)-C(L)

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 2.00 mm |
| HGW 2372 | 2.03 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|------------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.70 N |
| Spring Force at Working Travel | (Order Index E) 3.00 N |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|--------------------------|------------|
| WFS 1021/G-2.54-1.8 | 1.8 |
| WFS 1021/G-2.54-2.0 | 2.0 |
| WFS 1021/G-C2S-3.0-2.5-Z | 2.5 |
| WFS 1021/G-3.5-3.0-Z | 3.0 |
| WFS 1021/G-2.54-1.5-SW | 2.3 |
| WFS 1021/G-3.0-1.5-SW | 3.5 |

HOW TO ORDER

1021/ G - CX - 3.0 N E - Au - 2.0 C
1 2 3 4 5 6 7 8

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 High Temperature
6 Tip Plating 7 Tip Diameter 8 Tip Material (only for CuBe)


TIP STYLE · DIAMETER · PLATING



| AX | A6X | BX | CX | DX |
|----------|----------|----------|----------|----------|
| 2.00C Au | 2.00C Au | 1.00C Au | 1.30C Au | 0.80C Au |
| | | | 1.80C Au | 1.00C Au |
| | | | 2.00C Au | |
| | | | 3.00C Au | |
| | | | 3.50C Au | |



| D3X | EX | FX | HX | KX |
|----------|----------|----------|----------|----------|
| 2.00C Ag | 1.80C Au | 1.00C Au | 1.10C Au | 1.25C Au |
| | | | 1.40C Au | 1.75C Au |
| | | | 1.70C Au | |

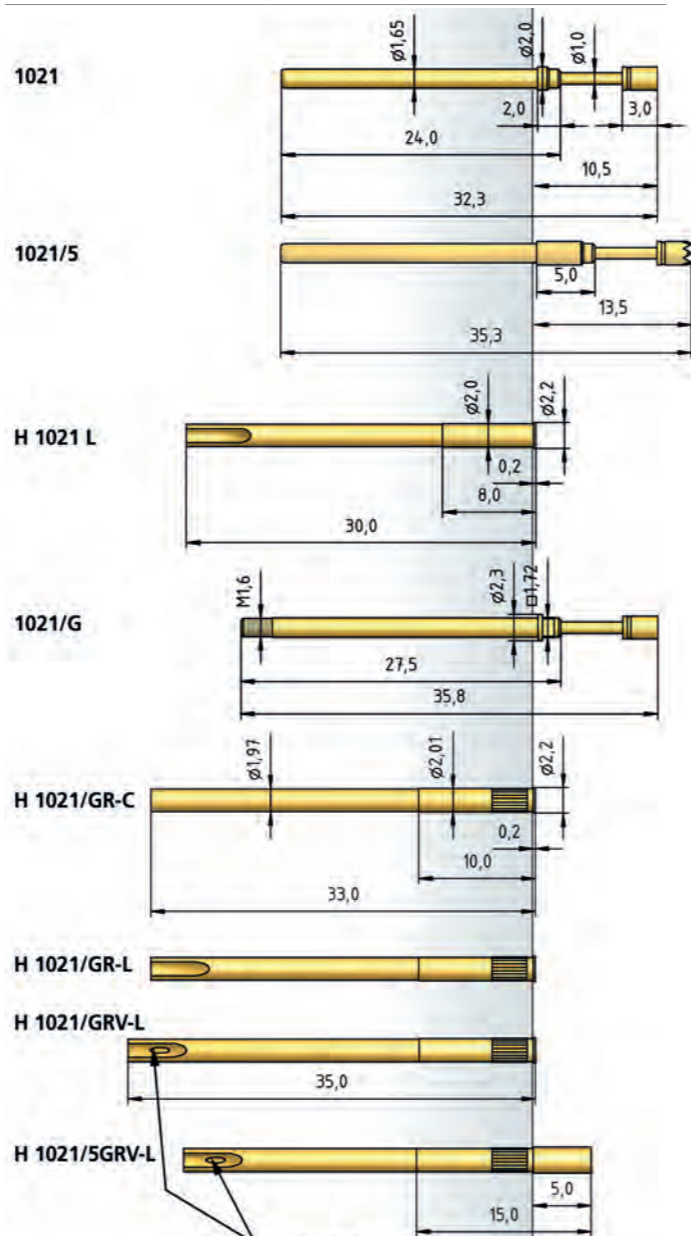


This receptacle is sealed vacuum-tight when a wire is soldered on.
Important:
If too much solder is used there is a risk that it will get into the tread.

TIP STYLE · DIAMETER · PLATING



| CX | FX |
|----------|----------|
| 2.00C Au | 2.00C Ag |

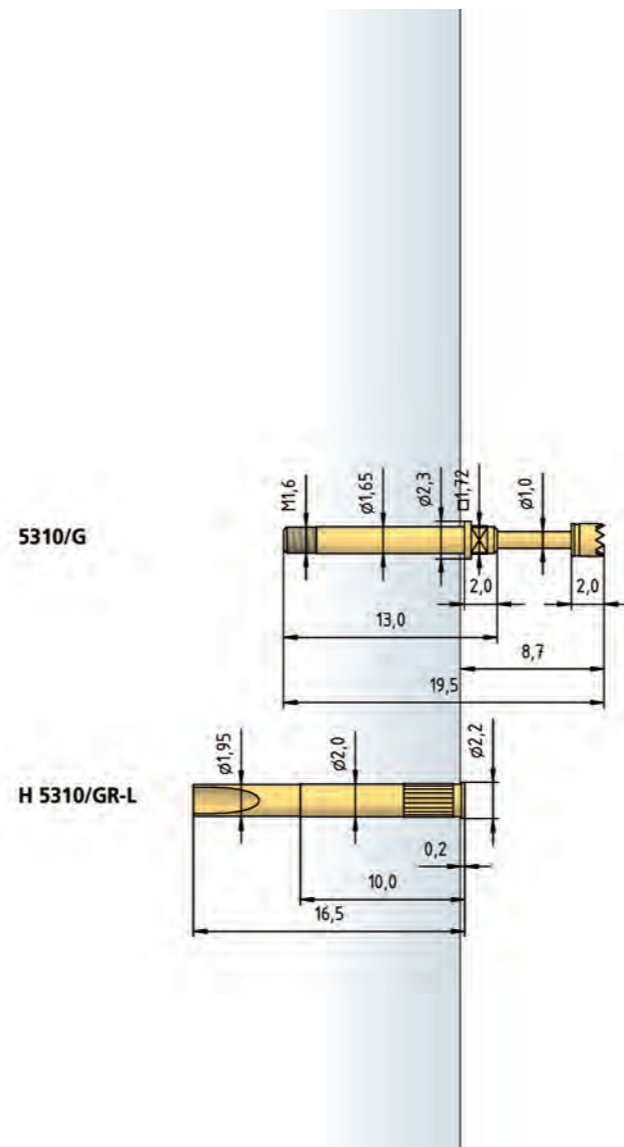

BENEFIT

Compact design
For use in function test or IN-LINE-TEST

MECHANICAL DATA

| | |
|--------------------------------|-----------------------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 4.50 mm |
| Working Travel | 3.50 mm |
| Pre-Loaded Spring Force | 0.35/ 0.40 N |
| Spring Force at Working Travel | 1.50/ 2.50 N |
| Spring Force at Working Travel | see High-Temperature Applications |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 16.0 A |
| Typical Continuity Resistance | ≤ 10 mOhm |

MATERIALS

| | |
|------------|------------------------------|
| Barrel | Brass, gold plated |
| Spring | Stainless Steel, gold plated |
| Plunger | CuBe, gold plated/Silver Cap |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 2.00 mm |
| HGW 2372 | 2.03 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|------------------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.35/ 0.40 N |
| Spring Force at Working Travel | (Order Index E) 1.50/ 2.50 N |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 1021/G-2.54-1.8 | 1.8 |
| WFS 1021/G-2.54-2.0 | 2.0 |

HOW TO ORDER

5310 G - CX - 1.5 N E - Au - 2.0 C
1 2 3 4 5 6 7 8

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 High Temperature
6 Tip Plating 7 Tip Diameter 8 Tip Material (only for CuBe)

Series 5110/S • 5110/G

High-Current Test Probe 160 mil / 4.0 mm

BENEFIT

- Compact design
- Very robust
- Low contact resistance
- Test of high currents

MECHANICAL DATA

| | |
|--------------------------------|-----------------------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -40 °C - +250 °C |
| Full Travel | 3.50 mm |
| Working Travel | 2.80 mm |
| Spring Force at Working Travel | see High-Temperature Applications |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 24.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|------------------------------|
| Barrel | Brass, gold plated |
| Spring | Stainless Steel, gold plated |
| Plunger | CuBe, gold plated |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 2.64 mm |
| HGW 2372 | 2.65 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|------------------------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.45/ 0.50/ 1.00 N |
| Spring Force at Working Travel | (Order Index E) 1.50/ 2.50/ 3.50 N |

AVAILABLE SCREW TOOLS

| | |
|---------------------|------------|
| Article Designation | max. Tip-∅ |
| WFS 1060/G-4.0-3.0 | 3.0 |

TIP STYLE · DIAMETER · PLATING




| | |
|-----------|-----------|
| CX | DX |
| 2.30C Au | 2.30C Au |

5110/S

5110/G

H 5110

H 5110/GR

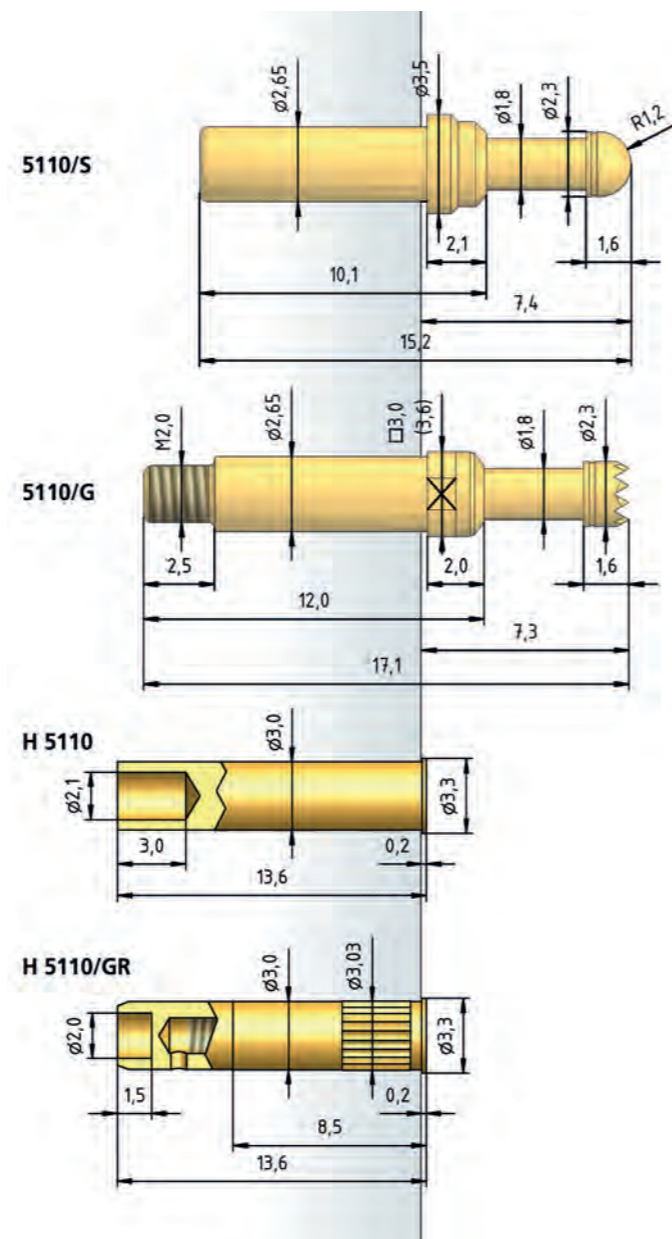

HOW TO ORDER

5110/ G - CX - 1.5 N E - Au - 2.3 C
 1 2 3 4 5 6 7 8

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 High Temperature
 6 Tip Plating 7 Tip Diameter 8 Tip Material (only for CuBe)

High-Current Test Probe 160 mil / 4.0 mm

TIP STYLE · DIAMETER · PLATING



| | | | | |
|-----------|------------|------------|----------------------------------|----------------------|
| AX | A6X | BAX | CX | DX |
| 3.00C Au | 3.00C Au | 1.80C Au | 2.30C Au 3.00C Au 4.00C Au | 2.30C Au 3.00C Au |



| | | | | |
|----------------------|------------|------------|----------------------------------|-----------|
| DX | DX1 | D3X | FX | GX |
| 1.00C Au 1.40C Au | 3.00C Au | 3.00C Ag | 2.30C Au 4.00C Au 6.00C Au | 2.50C Au |



| | | |
|-----------|------------|-----------|
| HX | H1X | KX |
| 1.80C Au | 1.30C Au | 3.00C Au |


1060

H 1050 L

1060/G

H 1060/G-L

H 1060/GRV-L

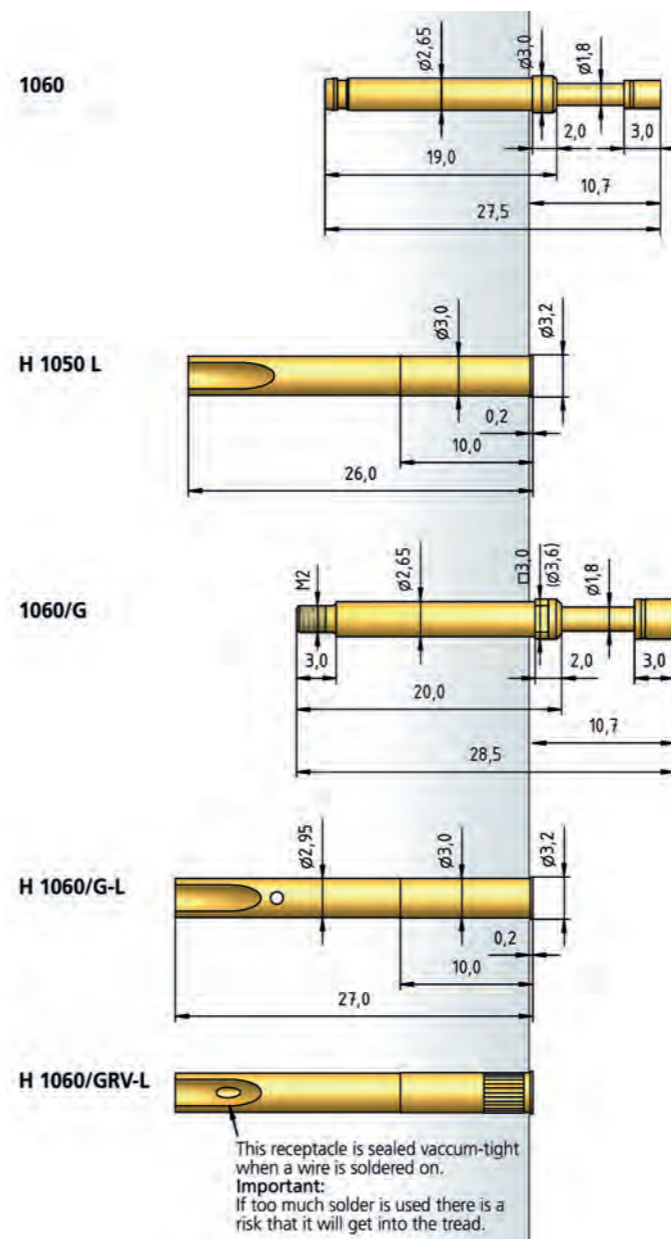

This receptacle is sealed vacuum-tight when a wire is soldered on.
Important:
 If too much solder is used there is a risk that it will get into the tread.

BENEFIT

- For use in burn-in and run-in test
- Transmission of high currents
- Low contact resistance

MECHANICAL DATA

| | |
|--------------------------------|-------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 5.50 mm |
| Working Travel | 4.40 mm |
| Pre-Loaded Spring Force | 0.80 N |
| Spring Force at Working Travel | 3.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 24.0 A |
| Typical Continuity Resistance | ≤ 10 mOhm |

MATERIALS

| | |
|------------|--|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, Stainless Steel, gold plated |
| Plunger | CuBe, gold plated/Silver Cap |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|-----------------------------|----------------|
| H 1050 L, H 1060/G-L | |
| HP 2361.1 (Trolitax) | 2.99...3.00 mm |
| HGW 2372 | 3.00 mm |
| H 1060/GRV-L | |
| HP 2361.1 (Trolitax) | 3.00 mm |
| HGW 2372 | 3.01 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|------------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.80 N |
| Spring Force at Working Travel | (Order Index E) 3.00 N |

AVAILABLE SCREW TOOLS

| | |
|----------------------|------------|
| Article Designation | max. Tip-∅ |
| WFS 1060/G-4.0-3.0 | 3.0 |
| WFS 1060/G-5.0-4.0-Z | 4.0 |
| WFS 1060/G-6.0-5.0-Z | 5.0 |
| WFS 1060/G4-5.0-4.0 | 4.0 |
| WFS 1060/G5-6.0-5.0 | 5.0 |

HOW TO ORDER

1060/ G - FX - 3.0 N E - Au - 4.0 C
 1 2 3 4 5 6 7 8

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 High Temperature
 6 Tip Plating 7 Tip Diameter 8 Tip Material (only for CuBe)

Series 1075 • 1075/G

High-Current Test Probe 197 mil / 5.0 mm

High-Current Test Probe 300 mil / 7.6 mm

Series 1080/G NEW

BENEFIT

For use in burn-in and run-in test
Transmission of high currents
Low contact resistance

MECHANICAL DATA

| | |
|--------------------------------|-----------------------------------|
| Center | 5.00 mm / 197 mil |
| Temperature Range | -40 °C - +250 °C |
| Full Travel | 5.50 (CLX 10.00 / CL1X 8.5) mm |
| Working Travel | 4.40 (CLX 8.00 / CL1X 7.4) mm |
| Spring Force at Working Travel | see High-Temperature Applications |

ELECTRICAL DATA

| | |
|-------------------------------|----------|
| Max. Current Rating | 50.0 A |
| Typical Continuity Resistance | ≤ 5 mOhm |

MATERIALS

| | |
|------------|--------------------------------|
| Barrel | Brass, gold plated |
| Spring | Stainless Steel, silver plated |
| Plunger | CuBe, gold plated/Silver Cap |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|----------------|
| HP 2361.1 (Trolitax) | 3.98...3.99 mm |
| HGW 2372 | 3.99...4.00 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|---------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 1.50/ 1.50/ 2.50 N |
| Spring Force at Working Travel | |
| (Order Index E) | 3.00/ 5.00/ 10.00 N |

AVAILABLE SCREW TOOLS

| | |
|---------------------|------------|
| Article Designation | max. Tip-∅ |
| WFS 1070/G-5.0-4.0 | 4.0 |


TIP STYLE · DIAMETER · PLATING



| AX | A6X | CLX | CL1X | CX |
|----------|----------|----------|----------------------------------|----------------------|
| 4.00C Au | 3.00C Au | 4.00C Au | 3.00C Au 4.00C Au 5.00C Au | 3.00C Au 4.00C Au |



| DNX | FX | KX |
|----------|----------|----------|
| 4.00C Ag | 4.00C Au | 3.00C Au |

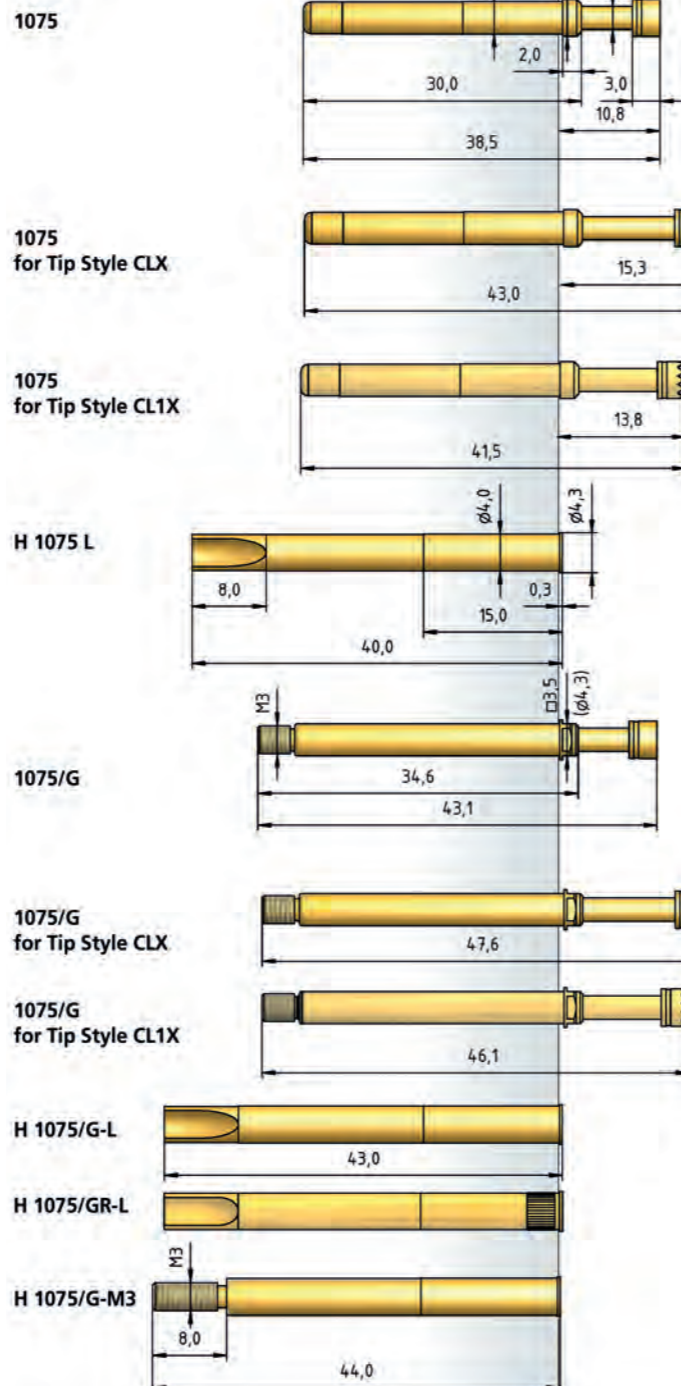

HOW TO ORDER


1075/ G - FX - 3.0 N E - Au - 4.0 C
1 2 3 4 5 6 7 8

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 High Temperature
6 Tip Plating 7 Tip Diameter 8 Tip Material (only for CuBe)

TIP STYLE · DIAMETER · PLATING



| CX | DNX |
|----------|----------|
| 6.00C Au | 6.00C Ag |

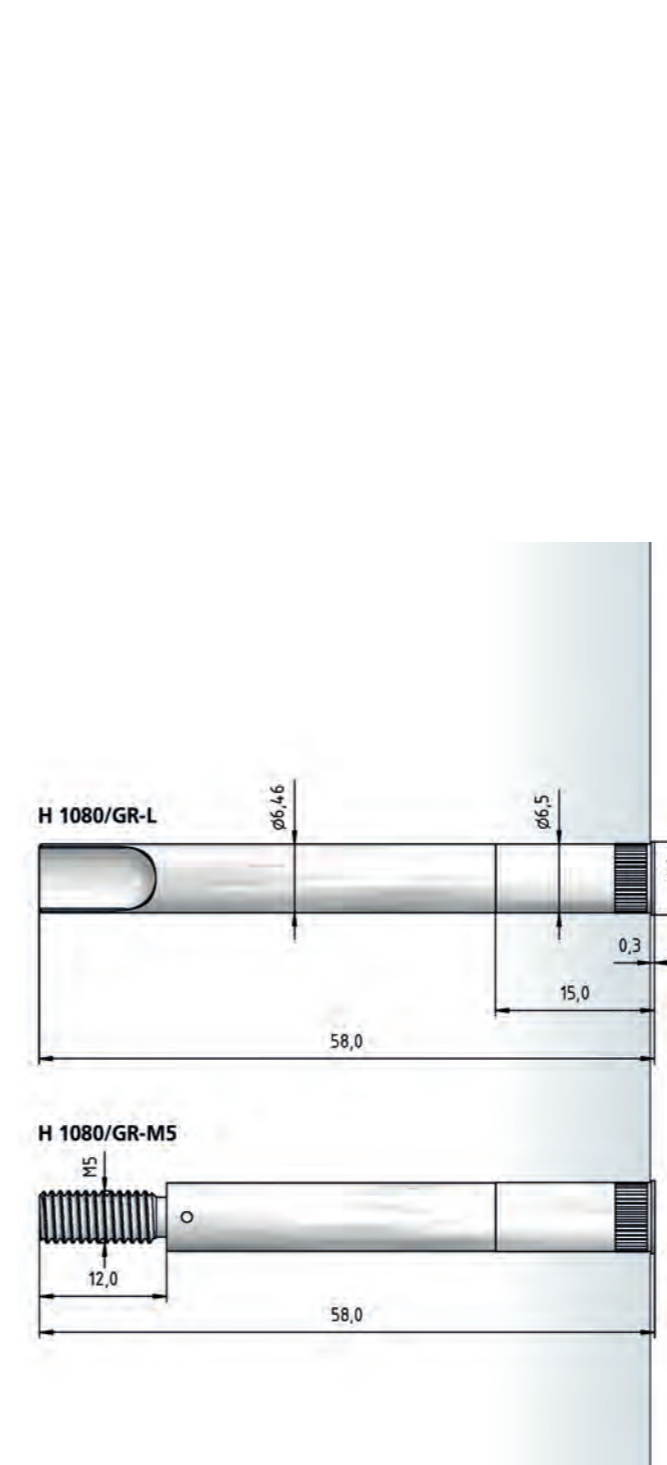

BENEFIT

Compact design
Use in extreme production environments
For use in function test or IN-LINE-TEST
Test of high currents

MECHANICAL DATA

| | |
|--------------------------------|-----------------------------------|
| Center | 7.60 mm / 300 mil |
| Temperature Range | -40 °C - +250 °C |
| Full Travel | 5.50 mm |
| Working Travel | 4.40 mm |
| Spring Force at Working Travel | see High-Temperature Applications |

ELECTRICAL DATA

| | |
|-------------------------------|----------|
| Max. Current Rating | 100.0 A |
| Typical Continuity Resistance | ≤ 5 mOhm |

MATERIALS

| | |
|------------|------------------------------|
| Barrel | Brass, silver plated |
| Spring | Stainless Steel, gold plated |
| Plunger | CuBe, gold plated/Silver Cap |
| Receptacle | Brass, silver plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------|----------------|
| HP 2361.1 (Trolitax) | 6.40...6.50 mm |
| HGW 2372 | 6.50 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 3.00/ 5.00 N |
| Spring Force at Working Travel | |
| (Order Index E) | 7.00/ 15.00 N |

AVAILABLE SCREW TOOLS

| | |
|---------------------------------|------------|
| Article Designation | max. Tip-∅ |
| Standard Socket - Wrench 6.0 mm | 6.0 |

HOW TO ORDER

1080/ G - CX - 7.0 N E - Au - 6.0 C
1 2 3 4 5 6 7 8

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 High Temperature
6 Tip Plating 7 Tip Diameter 8 Tip Material (only for CuBe)

PNEUMATIC TEST PROBES

Pneumatic Test Probes are operated with compressed air. The plunger presses against the test piece at an operating pressure of 6 bar applied to the test probe via a pneumatic hose. Depending on the size, the maximum contact pressure is up to 1.5 N.

Normally Pneumatic Test Probes are used for function test tasks, and always when measuring points must be triggered individually. A wide range of accessories with distributors, reducers, connection cable glands etc. is available for setting up an extremely large number of contacting processes. As the Pneumatic Test Probes are driven individually/independently, use without complicated test adapters is also possible.

In addition to standard types, there are models with an easy-replacement system and models which function as an opener. With the easy-to-use easy-replacement system, it is only necessary to replace the pneumatic cylinder together with the contacting unit – there is no need to release either the wiring or the pneumatic hose. This system, patented by PTR, considerably reduces set-up and maintenance times.

The opener (4034 series - see page 173) is a technically sophisticated variant, and is also patented. Because of the special design in the barrel, at first it is closed. It is only when a component to be contacted is not present and the switch travel is exceeded that the test probe opens and does not pass on a signal.

| SERIES | CENTER | PAGE |
|-----------------------|-------------------|------|
| 4006 | 118 mil / 3.00 mm | 170 |
| 4005 | 138 mil / 3.50 mm | 171 |
| 4004 | 160 mil / 4.00 mm | 172 |
| 4034 | 160 mil / 4.00 mm | 173 |
| 4004/G | 160 mil / 4.00 mm | 174 |
| Pneumatic Accessories | | 175 |



Series 4006

Pneumatic Test Probe 118 mil / 3.0 mm

Pneumatic Test Probe 138 mil / 3.5 mm

Series 4005

BENEFIT

- Contacting of individual test points
- Contacting without adapter possible
- For use in function test

MECHANICAL DATA

| | |
|--------------------------------|-------------------------------------|
| Center | 3.00 mm / 118 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 10.00 mm |
| Working Travel | 6.00 mm |
| Spring Force at Working Travel | 0.60 N |
| Operating Pressure | 6 bar |
| Operating Medium | Compressed Air (filtered, oil-free) |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 2.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.40 mm |
| HGW 2372 (Glass filled material) | 2.41 mm |

TIP STYLE · DIAMETER · PLATING



| BST1 | C | G | V |
|---------|---------|---------|---------|
| 1.50 Rh | 2.50 Rh | 1.30 Rh | 1.00 Rh |

TIP STYLE · DIAMETER · PLATING



| BST1 | C | G | H |
|---------|---------|---------|---------|
| 1.50 Rh | 2.50 Rh | 1.30 Rh | 2.00 Rh |

BENEFIT

- Contacting of individual test points
- Contacting without adapter possible
- For use in function test

MECHANICAL DATA

| | |
|--------------------------------|-------------------------------------|
| Center | 3.50 mm / 138 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 10.00 mm |
| Working Travel | 6.00 mm |
| Spring Force at Working Travel | 0.80 N |
| Operating Pressure | 6 bar |
| Operating Medium | Compressed Air (filtered, oil-free) |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 2.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.00 mm |
| HGW 2372 (Glass filled material) | 3.01 mm |

Accessories see page 175

Accessories see page 175

HOW TO ORDER

4006 - BST1 - 0.6 N - Rh - 1.5 - L

1 2 3 4 5 6



1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 For Connection of L 4000

HOW TO ORDER

4005 - BST1 - 0.8 N - Rh - 2.0 - L

1 2 3 4 5 6

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 For Connection of L 4000

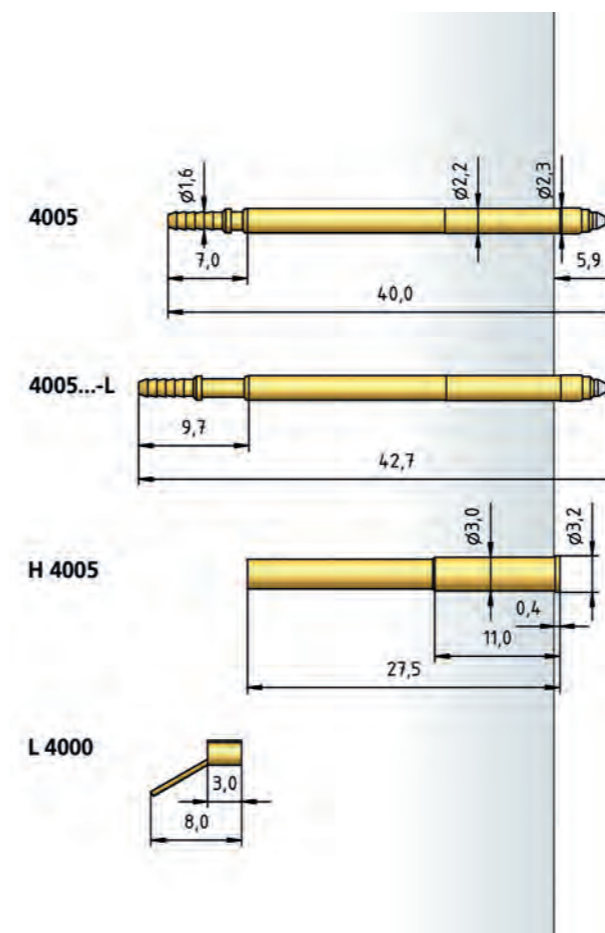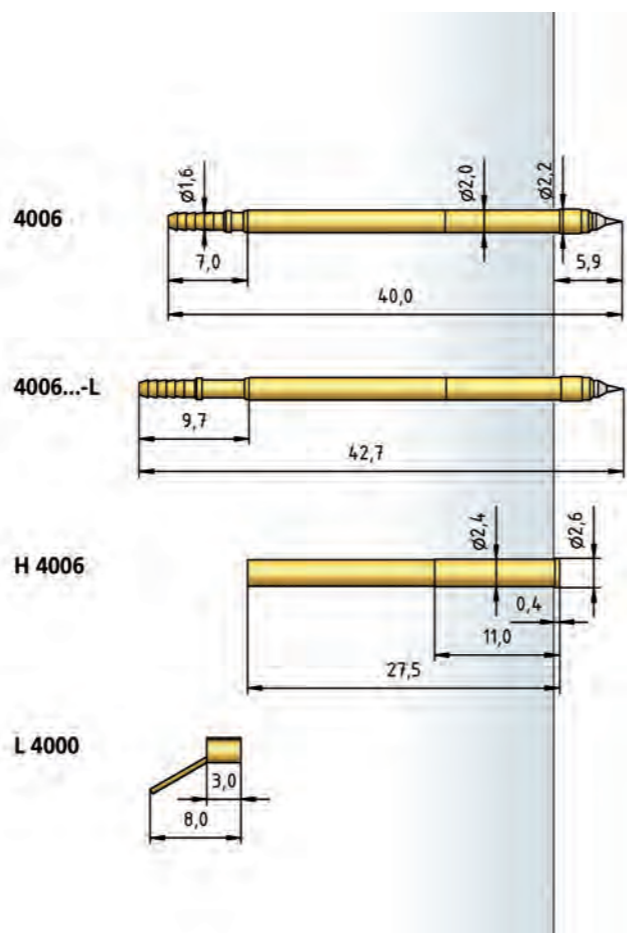

Series 4004

Pneumatic Test Probe 160 mil / 4.0 mm

Pneumatic Test Probe "Opener" Type (NC) 160 mil / 4.0 mm

Series 4034

BENEFIT

- Contacting of individual test points
- Contacting without adapter possible
- For use in function test

MECHANICAL DATA

| | |
|--------------------------------|-------------------------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 10.00 mm |
| Working Travel | 6.00 mm |
| Spring Force at Working Travel | 1.50 N |
| Operating Pressure | 6 bar |
| Operating Medium | Compressed Air (filtered, oil-free) |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.40 mm |
| HGW 2372 (Glass filled material) | 3.41 mm |

TIP STYLE · DIAMETER · PLATING



| A | BST1 | G |
|---------|---------|---------|
| 3.00 Rh | 2.00 Rh | 1.30 Rh |

TIP STYLE · DIAMETER · PLATING



| A | BST1 | G |
|---------|---------|---------|
| 3.00 Rh | 2.00 Rh | 1.30 Rh |

BENEFIT

- Switching test probe "Opener" (NC) type
- Contacting of individual test points
- Contacting without adapter possible
- For use in function test

MECHANICAL DATA

| | |
|----------------------------------|---|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 10.00 mm |
| Working Travel | 5.00 mm |
| Switching Travel | 6.00 mm |
| Spring Force at Working Travel | 1.60 N |
| Spring Force at Switching Travel | 1.50 N |
| Operating Pressure | 6 bar |
| Operating Medium | Compressed Air (filtered bar, oil-free) |

ELECTRICAL DATA

Receptacle-Probe Tip

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

TUBE CONNECTION-PROBE TIP

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 50 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.40 mm |
| HGW 2372 (Glass filled material) | 3.41 mm |

Accessories see page 175

Accessories see page 175

HOW TO ORDER

4004 - BST1 - 1.5 N - Rh - 2.0 - L

1 2 3 4 5 6



1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 For Connection of L 4000

HOW TO ORDER

4034 - G - 1.6 N - Rh - 1.3 - L

1 2 3 4 5 6

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 For Connection of L 4000

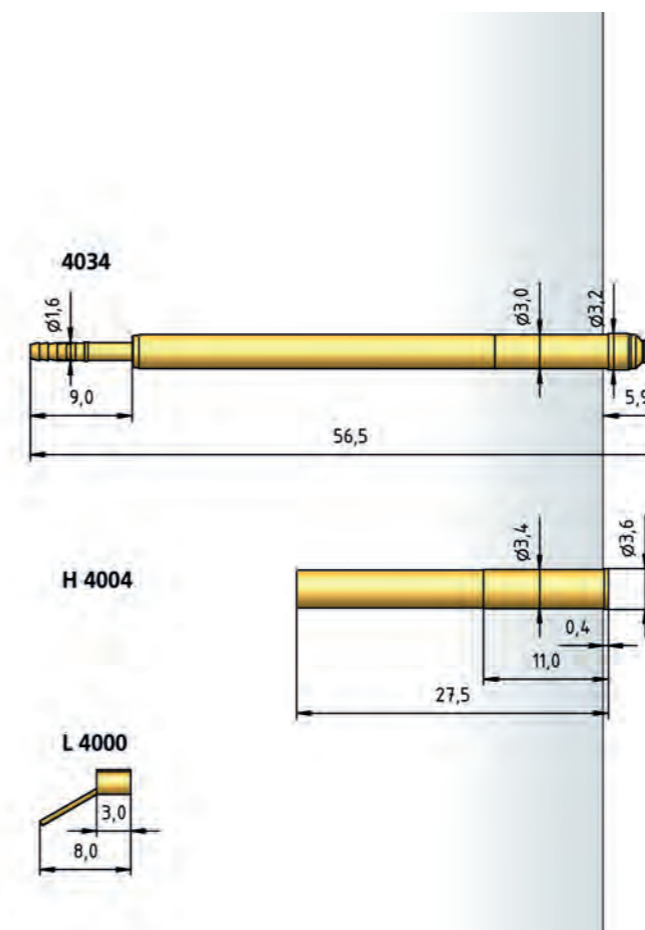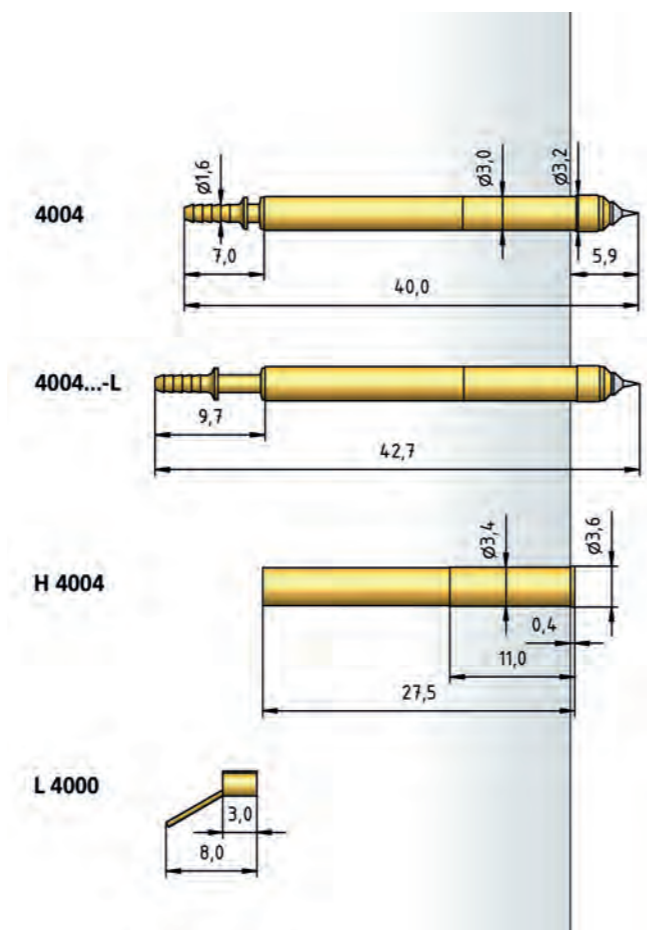

Series 4004/G

Pneumatic Test Probe with Easy-Replacement System 160 mil / 4.0 mm

Accessories Pneumatic Test Probes

BENEFIT

- Contacting of individual test points
- Contacting without adapter possible
- For use in function test
- Replacement without soldering

MECHANICAL DATA

| | |
|--------------------------------|-------------------------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 10.00 mm |
| Working Travel | 6.00 mm |
| Spring Force at Working Travel | 0.60 N |
| Operating Pressure | 6 bar |
| Operating Medium | Compressed Air (filtered, oil-free) |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 2.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Steel |
| Receptacle | Brass, gold plated |


RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 3.40 mm |
| HGW 2372 (Glass filled material) | 3.41 mm |


AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|----------------------|------------|
| WFS 1060/G-4.0-3.0 | 3.0 |
| WFS 1060/G-5.0-4.0-Z | 4.0 |
| WFS 1060/G-6.0-5.0-Z | 5.0 |


TIP STYLE · DIAMETER · PLATING

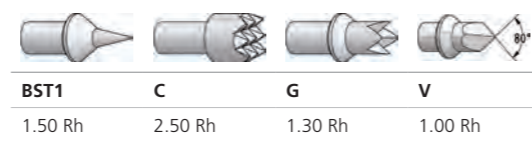

4004/G (without Receptacle)

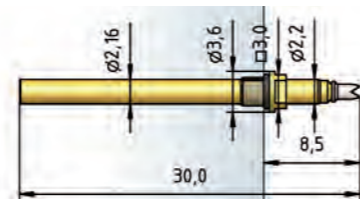


4004/G (with Receptacle H4004/GR pre-assembled)

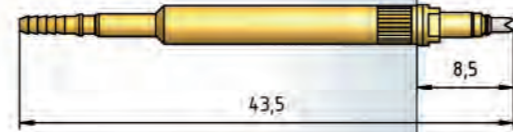


4004/G (with Receptacle H4004/GR-L pre-assembled)




H 4004/GR

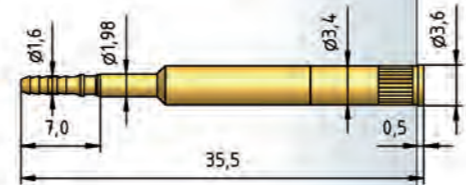

H 4004/GR-L

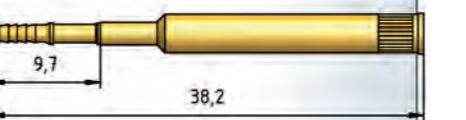

L 4000



Accessories see page 175

HOW TO ORDER: Test Probe with Receptacle

4004/ G - BST1 - 0.6 N - Rh - 1.5 - GR - L


1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 Tip Plating 6 Tip Diameter 7 Receptacle 8 For Connection of L 4000

HOW TO ORDER: Single Test Probe


4004/ G - BST1 - 0.6 N - Rh - 1.5

1 Series 2 Threaded Design 3 Tip Style 4 Spring Force 5 Tip Plating 6 Tip Diameter


Reducer RS 3/1




Reducer RS 3/2




Dummy Plug for Distributor (incl. 1 seal) BSV 1/8




Dummy Plug for Distributor (incl. 1 seal) BSV M5




Threated Sleeve (incl. 1 seal) AV M5/1





Threated Sleeve (incl. 1 seal) AV M5/2




Threated Sleeve (incl. 1 seal) AV M5/3



T-Piece TS 3xM5



Tenfolder Distributor V 10xM5

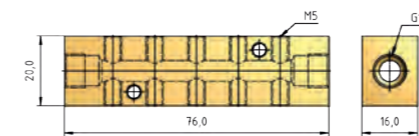

Compressed Air Hose for NW 1 DS 1

Compressed Air Hose for NW 3 DS 3

BATTERY TEST PROBES

As Battery Test Probes, they are used, for example, wherever it is necessary to charge the rechargeable batteries in mobile devices such as scanners, card readers, communication devices, etc.

In many cases, they are also used to connect two PCBs. In addition to many standard products, PTR specializes in customer-specific solutions.

As a result of our wealth of experience in the connection terminal sector, we know exactly what is important in the mounting of PCBs. In addition to complete interface pin blocks (see page 188), of course our products are also available belted and with "pick & place" pads. We develop professional solutions together with our customers, and then implement them precisely.

Selected Applications

- » Mobile process data acquisition devices
- » Medical devices
- » Military devices
- » PCB technology
- » Mobile communication
- » Audio-video applications
- » Data acquisition devices
- » Automotive equipment
- » Heating control units

| SERIES | CENTER | PAGE |
|---------|-------------------|------|
| 1064 | 100 mil / 2.54 mm | 178 |
| 5303 | 100 mil / 2.54 mm | 179 |
| 5305 | 100 mil / 2.54 mm | 180 |
| 5099 | 118 mil / 3.00 mm | 181 |
| 5099.04 | 118 mil / 3.00 mm | 182 |
| 5099.43 | 138 mil / 3.50 mm | 183 |
| 5110/S | 160 mil / 4.00 mm | 184 |
| 5082 | 256 mil / 6.50 mm | 185 |
| 5082.01 | 256 mil / 6.50 mm | 186 |
| 5082/L | 256 mil / 6.50 mm | 187 |



Series 1064

Battery Probe 100 mil / 2.54 mm

Battery Probe 100 mil / 2.54 mm

Series 5303

BENEFIT

Short, compact size
Board-to-board contacting
For use in charging units

MECHANICAL DATA

| | |
|--------------------------------|-------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 1.27 mm |
| Working Travel | up to 1.27 mm |
| Pre-Loaded Spring Force | 0.35 N |
| Spring Force at Working Travel | 1.25 N |

ELECTRICAL DATA

| | |
|-------------------------------|------------|
| Max. Current Rating | 5.0 A |
| Typical Continuity Resistance | ≤ 185 mOhm |

MATERIALS

| | |
|------------|--|
| Barrel | Nickel Silver, non plated |
| Spring | Spring Steel, Stainless Steel, silver plated |
| Plunger | CuBe, gold plated |
| Receptacle | Nickel Silver, non plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.75 mm |
| HGW 2372 (Glass filled material) | 1.75 mm |

HIGH-TEMPERATURE APPLICATIONS


| | |
|--------------------------------|------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.20/ 0.75 N |
| Spring Force at Working Travel | |
| (Order Index E) | 0.60/ 1.85 N |

TIP STYLE · DIAMETER · PLATING


| | | | | |
|----------|----------|----------|----------|----------|
| | | | | |
| A | D | D | H | H |
| 1.96C Au | 1.17C Au | 1.96C Au | 1.96C Au | 3.30C Au |

| | | | |
|----------|-----------|-----------|-----------|
| | | | |
| H | H1 | H1 | H2 |
| 3.96C Au | 1.57C Au | 2.49C Au | 1.96C Au |


1064-A/1064-D




1064-H/1064-H1




1064-H2




H 1064 L



H 1064 C




H 1064 W

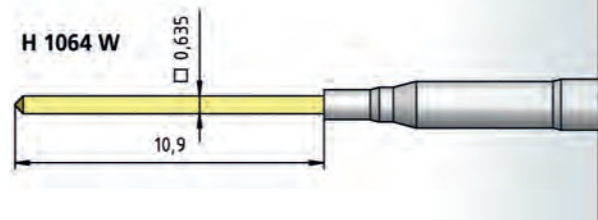

TIP STYLE · DIAMETER · PLATING

| |
|----------|
| |
| D |
| 1.07M Au |

5303

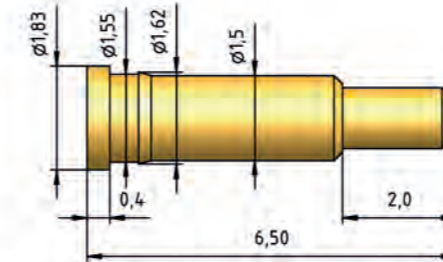

BENEFIT

Short, compact size
Board-to-board contacting
SMD - Automated Assembly
Tape on Reel

MECHANICAL DATA

| | |
|--------------------------------|-------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 1.40 mm |
| Working Travel | 0.70 mm |
| Pre-Loaded Spring Force | 0.25 N |
| Spring Force at Working Travel | 0.85 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.5 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|---------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Brass, gold plated |

HOW TO ORDER

1064 - D - 0.6 N E - Au - 1.96 C
1 2 3 4 5 6 7

1 Series 2 Tip Style 3 Spring Force 4 High Temperature 5 Tip Plating
6 Tip Diameter 7 Tip Material (only for CuBe)

HOW TO ORDER

5303 - D - 0.85 N - Au - 1.07 M
1 2 3 4 5 6

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 Tip Material (only for Brass)

Series 5305

Battery Probe 100 mil / 2.54 mm

Battery Probe 118 mil / 3.0 mm

Series 5099

BENEFIT

- Short, compact size
- Board-to-board contacting
- SMD - Automated Assembly
- Tape on Reel

MECHANICAL DATA

| | |
|-----------------------------|-----------------------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 1.00 mm |
| Spring Force at Full Travel | see High-Temperature Applications |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.5 A |
| Typical Continuity Resistance | ≤ 10 mOhm |

MATERIALS

| | |
|---------|------------------------------|
| Barrel | Brass, gold plated |
| Spring | Stainless Steel, gold plated |
| Plunger | Brass, gold plated |

HIGH-TEMPERATURE APPLICATIONS

| | |
|---|------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.40 N |
| Spring Force at Working Travel (Order Index E) | 1.00 N |

TIP STYLE · DIAMETER · PLATING



D
1.02M Au

TIP STYLE · DIAMETER · PLATING



| | | | |
|----------|----------|----------|----------|
| D | D | G | V |
| 1.00C Au | 1.30C Au | 1.30C Au | 1.30C Au |

BENEFIT

- Short, compact size
- Board-to-board contacting
- For use in charging units

MECHANICAL DATA

| | |
|--------------------------------|--------------------|
| Center | 3.00 mm / 118 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 1.20 mm |
| Working Travel | 1.00 mm |
| Pre-Loaded Spring Force | 0.30/ 0.30/ 0.50 N |
| Spring Force at Working Travel | 0.60/ 1.00/ 2.00 N |

ELECTRICAL DATA


| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 10 mOhm |

MATERIALS


| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe, gold plated |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL


| | |
|----------------------------------|---------|
| with Receptacle | |
| HP 2361.1 (Trolitax) | 2.29 mm |
| HGW 2372 (Glass filled material) | 2.30 mm |
| without Receptacle | |
| HP 2361.1 (Trolitax) | 1.99 mm |
| HGW 2372 (Glass filled material) | 2.00 mm |

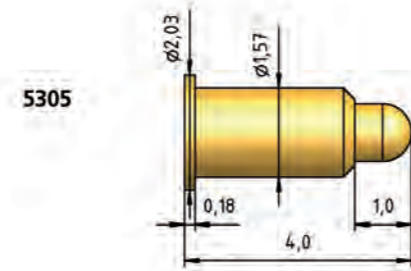

5099

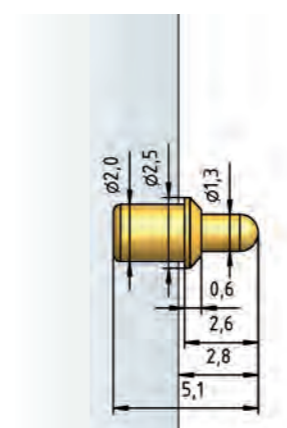

H 5099-25



H 5099-50



HOW TO ORDER

5305 - D - 1.0 N - Au - 1.02 M

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 Tip Material (only for Brass)

HOW TO ORDER

5099 - D - 2.0 N - Au - 1.3 C

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter
6 Tip Material (only for CuBe)

Series 5099.04

Battery Probe 118 mil / 3.0 mm

Battery Probe 138 mil / 3.5 mm

Series 5099.43 NEW

BENEFIT

Long full travel
Board-to-board contacting
For use in charging units

MECHANICAL DATA

| | |
|--------------------------------|-------------------|
| Center | 3.00 mm / 118 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 4.00 mm |
| Working Travel | 3.30 mm |
| Pre-Loaded Spring Force | 0.15/ 0.25 N |
| Spring Force at Working Travel | 0.50/ 2.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe, gold plated |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| with Receptacle | |
| HP 2361.1 (Trolitax) | 2.29 mm |
| HGW 2372 (Glass filled material) | 2.30 mm |
| without Receptacle | |
| HP 2361.1 (Trolitax) | 1.99 mm |
| HGW 2372 (Glass filled material) | 2.00 mm |

TIP STYLE · DIAMETER · PLATING



D4
1.30C Au

TIP STYLE · DIAMETER · PLATING



D
1.30C Au

BENEFIT

Position horizontal
Board-to-board contacting
Tape on Reel
SMD - Automated Assembly
Individual placement by housing design

MECHANICAL DATA

| | |
|--------------------------------|-------------------|
| Center | 3.50 mm / 138 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 4.00 mm |
| Working Travel | 3.30 mm |
| Pre-Loaded Spring Force | 0.15/ 0.25 N |
| Spring Force at Working Travel | 0.50/ 2.00 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 8.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS


| | |
|---------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe, gold plated |

HOW TO ORDER


5099 .04 - D4 - 2.0 N - Au - 1.3 C

1 Series 2 Variant 3 Tip Style 4 Spring Force 5 Tip Plating
6 Tip Diameter 7 Tip Material (only for CuBe)

5099.04

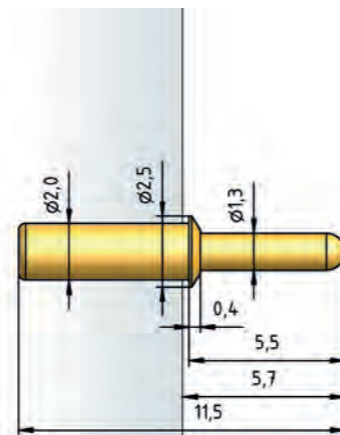


H 5099-25



H 5099-50



5099.43

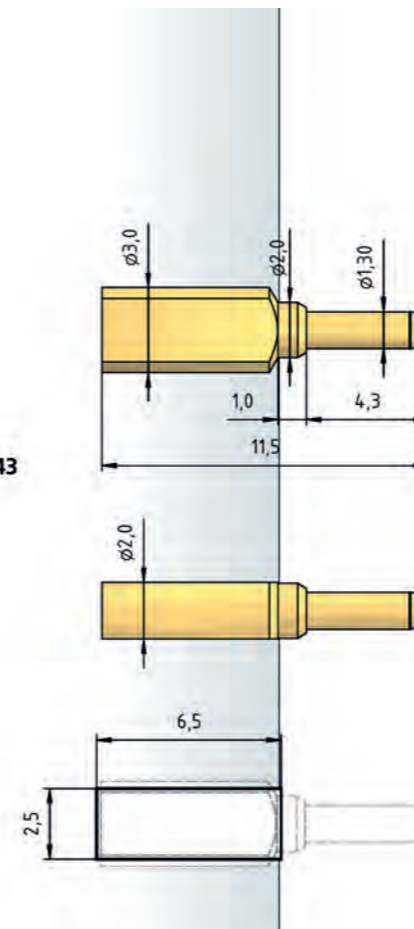

HOW TO ORDER

5099 .43 - D - 2.0 N - Au - 1.3 C

1 Series 2 Variant 3 Tip Style 4 Spring Force 5 Tip Plating
6 Tip Diameter 7 Tip Material (only for CuBe)

Series 5110/S

Battery Probe 160 mil / 4.0 mm

Battery Probe 256 mil / 6.5 mm

Series 5082

BENEFIT

Short, compact size
Board-to-board contacting
For use in charging units

MECHANICAL DATA

| | |
|--------------------------------|-----------------------------------|
| Center | 4.00 mm / 160 mil |
| Temperature Range | -40 °C - +250 °C |
| Full Travel | 3.50 mm |
| Working Travel | 2.80 mm |
| Spring Force at Working Travel | see High-Temperature Applications |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 10.0 A |
| Typical Continuity Resistance | ≤ 10 mOhm |

MATERIALS

| | |
|------------|------------------------------|
| Barrel | Brass, gold plated |
| Spring | Stainless Steel, gold plated |
| Plunger | CuBe, gold plated |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 2.64 mm |
| HGW 2372 (Glass filled material) | 2.65 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|--------------------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.25/ 0.30/ 0.45/ 0.50/ 1.00 N |
| Spring Force at Working Travel | |
| (Order Index E) | 0.80/ 1.20/ 1.50/ 2.50/ 3.50 N |

TIP STYLE · DIAMETER · PLATING




| C | D1 | D | E | F |
|----------|----------|----------|----------|----------|
| 2.30C Au | 2.30C Au | 2.30C Au | 2.30C Au | 2.30C Au |
| 3.50C Au | | | | |




K2

2.30C Au


5110/S

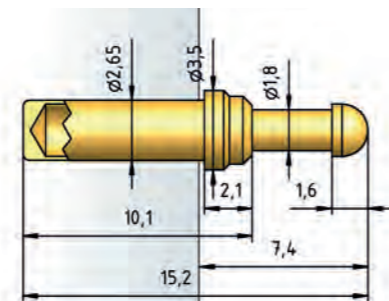


5110/S-K2

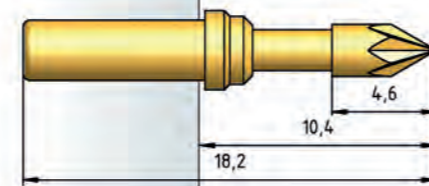


5110/S.02

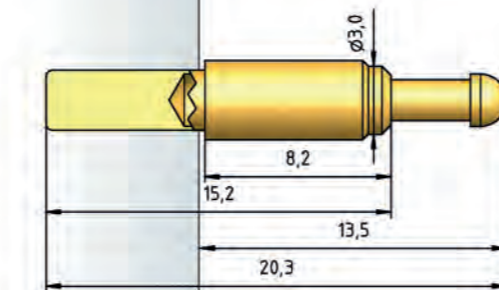

5110/1-D1

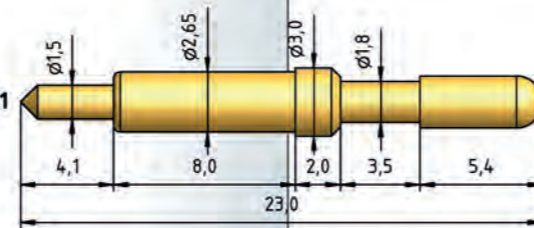

H 5110

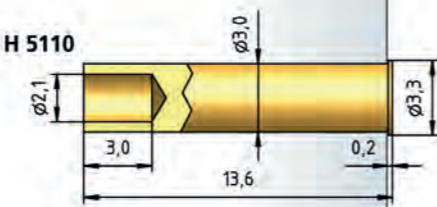


TIP STYLE · DIAMETER · PLATING




| B1D | C | D | E1D | G |
|----------|---------|----------|----------|---------|
| 4.00M Au | 4.00 Au | 4.00M Au | 4.00M Au | 4.00 Au |


5082




H 5082



H 5082/S-22

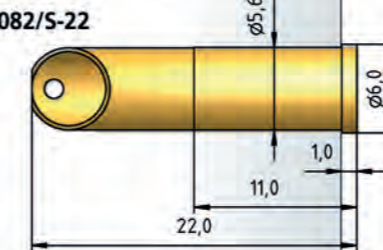

ZRH 5082/3



BENEFIT

Sturdy design
For use in tough conditions
Long Lifetime

Spring forces up to 8.0 N

MECHANICAL DATA

| | |
|--------------------------------|-----------------------------------|
| Center | 6.50 mm / 256 mil |
| Temperature Range | -40 °C - +250 °C |
| Full Travel | 4.00 mm |
| Working Travel | 3.20 mm |
| Spring Force at Working Travel | see High-Temperature Applications |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|------------|------------------------------|
| Barrel | Brass, gold plated |
| Spring | Stainless Steel, gold plated |
| Plunger | Steel, Brass |
| Receptacle | Brass, gold plated |

RECOMMENDED DIAMETER OF DRILL

without Receptacles

| | |
|----------------------|---------|
| HP 2361.1 (Trolitax) | 4.97 mm |
|----------------------|---------|

with Receptacles

| | |
|----------------------|----------------|
| HP 2361.1 (Trolitax) | 5.59...5.60 mm |
|----------------------|----------------|

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|--------------------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.20/ 0.40/ 1.00/ 0.80/ 1.60 N |
| Spring Force at Working Travel | |
| Order Index E) | 0.60/ 1.50/ 3.00/ 4.00/ 8.00 N |

HOW TO ORDER

5110/S - D - 1.5 N E - Au - 2.3 C
1 2 3 4 5 6 7

1 Series 2 Tip Style 3 Spring Force 4 High Temperature 5 Tip Plating
6 Tip Diameter 7 Tip Material (only for CuBe)

HOW TO ORDER

5082 - D - 3.0 N E - Au - 4.0 M
1 2 3 4 5 6 7

1 Series 2 Tip Style 3 Spring Force 4 High Temperature 5 Tip Plating
6 Tip Diameter 7 Tip Material (only for Brass)

Series 5082.01

Battery Probe 256 mil / 6.5 mm

Battery Probe 256 mil / 6.5 mm

Series 5082/L

BENEFIT

- Sturdy design
- For use in tough conditions
- Long lifetime
- Low contact resistances
- Spring forces up to 8.0 N

MECHANICAL DATA

| | |
|--------------------------------|-----------------------------------|
| Center | 6.50 mm / 256 mil |
| Temperature Range | -40 °C - +250 °C |
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Spring Force at Working Travel | see High-Temperature Applications |

ELECTRICAL DATA

Connector Receptacle

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 100 mOhm |

Connector Plunger

| | |
|-------------------------------|---------------|
| Max. Current Rating | 15.0...20.0 A |
| Typical Continuity Resistance | ≤ 10 mOhm |

MATERIALS

| | |
|---------|------------------------------|
| Barrel | Brass, gold plated |
| Spring | Stainless Steel, gold plated |
| Plunger | Steel |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------|----------------|
| without Receptacles | |
| HP 2361.1 (Trolitax) | 4.97 mm |
| with Receptacles | |
| HP 2361.1 (Trolitax) | 5.59...5.60 mm |


HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|--------------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.20/ 0.40/ 1.00/ 1.60 N |
| Spring Force at Working Travel | |
| (Order Index E) | 0.60/ 1.50/ 3.00/ 8.00 N |

TIP STYLE · DIAMETER · PLATING




| | | | |
|-----------|----------|----------|----------|
| B1 | C | D | G |
| 4.00 Ni | 4.00 Ni | 4.00 Ni | 4.00 Ni |

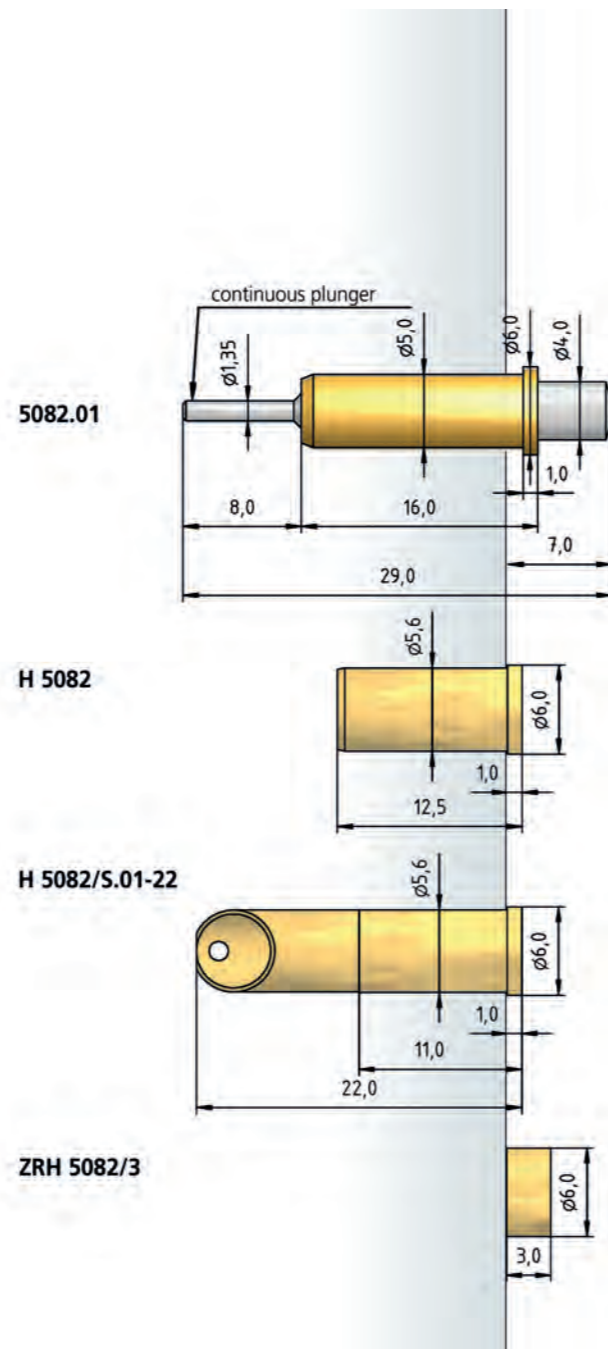

TIP STYLE · DIAMETER · PLATING



| | |
|----------|----------|
| C | D |
| 4.00C Au | 4.00C Au |

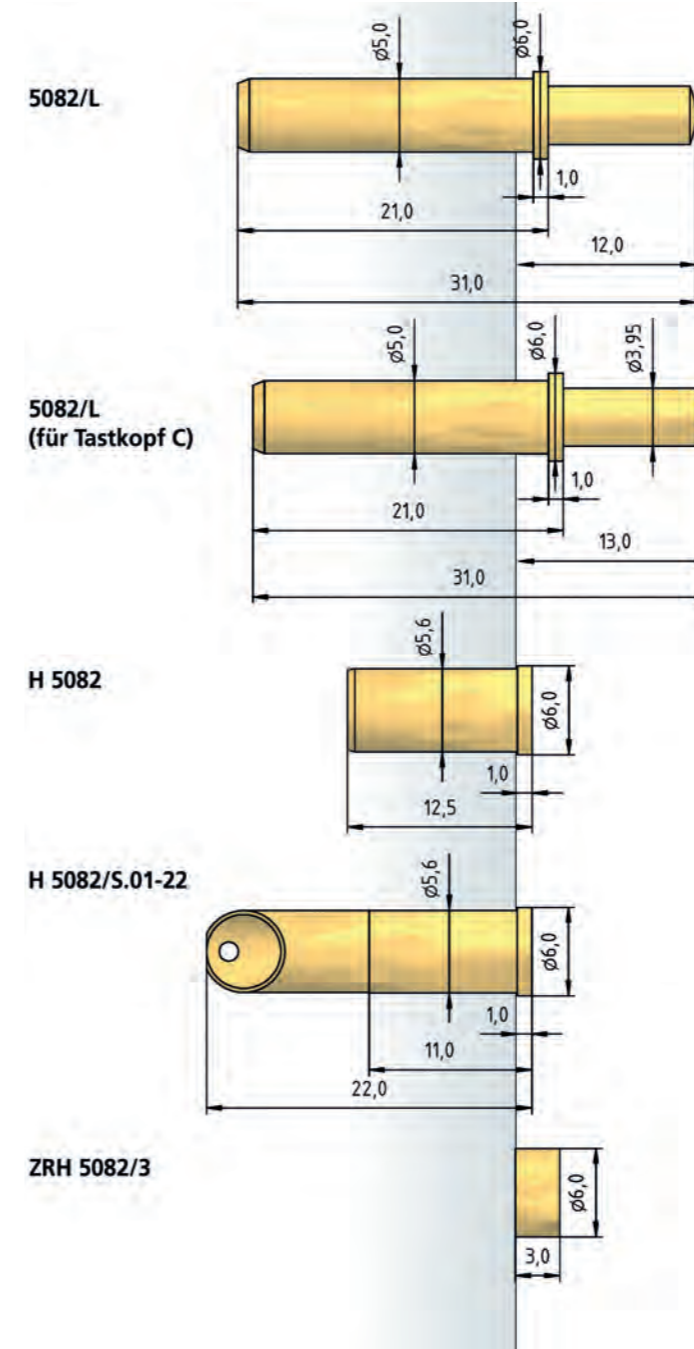

BENEFIT

- Sturdy design
- For use in tough conditions
- Long lifetime
- Long full travel
- Spring forces up to 8.0 N

MECHANICAL DATA

| | |
|--------------------------------|-----------------------------------|
| Center | 6.50 mm / 256 mil |
| Temperature Range | -40 °C - +250 °C |
| Full Travel | 10.00 mm |
| Working Travel | 8.00 mm |
| Spring Force at Working Travel | see High-Temperature Applications |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 5.0...8.0 A |
| Typical Continuity Resistance | ≤ 100 mOhm |

MATERIALS

| | |
|---------|------------------------------|
| Barrel | Brass, gold plated |
| Spring | Stainless Steel, gold plated |
| Plunger | CuBe |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------|----------------|
| without Receptacles | |
| HP 2361.1 (Trolitax) | 4.97 mm |
| with Receptacles | |
| HP 2361.1 (Trolitax) | 5.59...5.60 mm |

HIGH-TEMPERATURE APPLICATIONS

| | |
|--------------------------------|--------------------|
| Temperature Range | -40 °C - +250 °C |
| Pre-Loaded Spring Force | 0.40/ 1.00/ 3.00 N |
| Spring Force at Working Travel | |
| (Order Index E) | 1.50/ 3.00/ 8.00 N |

HOW TO ORDER

5082.01 - D - 3.0 N E - Ni - 4.0

1 2 3 4 5 6

1 Series 2 Tip Style 3 Spring Force 4 High Temperature 5 Tip Plating 6 Tip Diameter

HOW TO ORDER

5082/L - D - 8.0 N E - Au - 4.0

1 2 3 4 5 6

1 Series 2 Tip Style 3 Spring Force 4 High Temperature 5 Tip Plating 6 Tip Diameter

INTERFACE PIN BLOCKS

Interface Pin Blocks serve the same function as battery probes (see page 176). They can be used as a charging contact in almost all mobile devices, but also for connecting PCBs and as signal conductors, etc.

In such cases, the important advantage is that our standard allows the simultaneous positioning of up to 20 contacts which can be soldered onto the PCB using reflow processes.


As a result of our considerable experience in the manufacturing of injection moulding tools for the connection terminal sector, PTR offers complete solutions including plastic carriers, tape-and-reel, and "pick & place" pads, including for individually adapted products. Other types of packing, for example trays, are also available for small quantities and less-automated manufacturing processes. We develop professional solutions together with our customers, and then implement them as scheduled.

The quality of our contacts complies with internationally recognized test scenarios. Our interface pin blocks are approved with UL certification in both the USA and Canada regions.

Series 5322 has passed vibration and shock tests without any measurable contact loss according to the following standards:

- » IEC 60068-2-6, Test Fc: Vibration (sinusoidal)
- » IEC 60068-2-27, Test Ea and guidance: Shock
- » IEC 60512-2-5, Test 2e: Contact disturbance

| SERIES | CENTER | PAGE |
|-----------------------|-------------------|------|
| 5322 - FKB - vertical | 100 mil / 2.54 mm | 190 |
| 5322 - PKB - vertical | 100 mil / 2.54 mm | 191 |

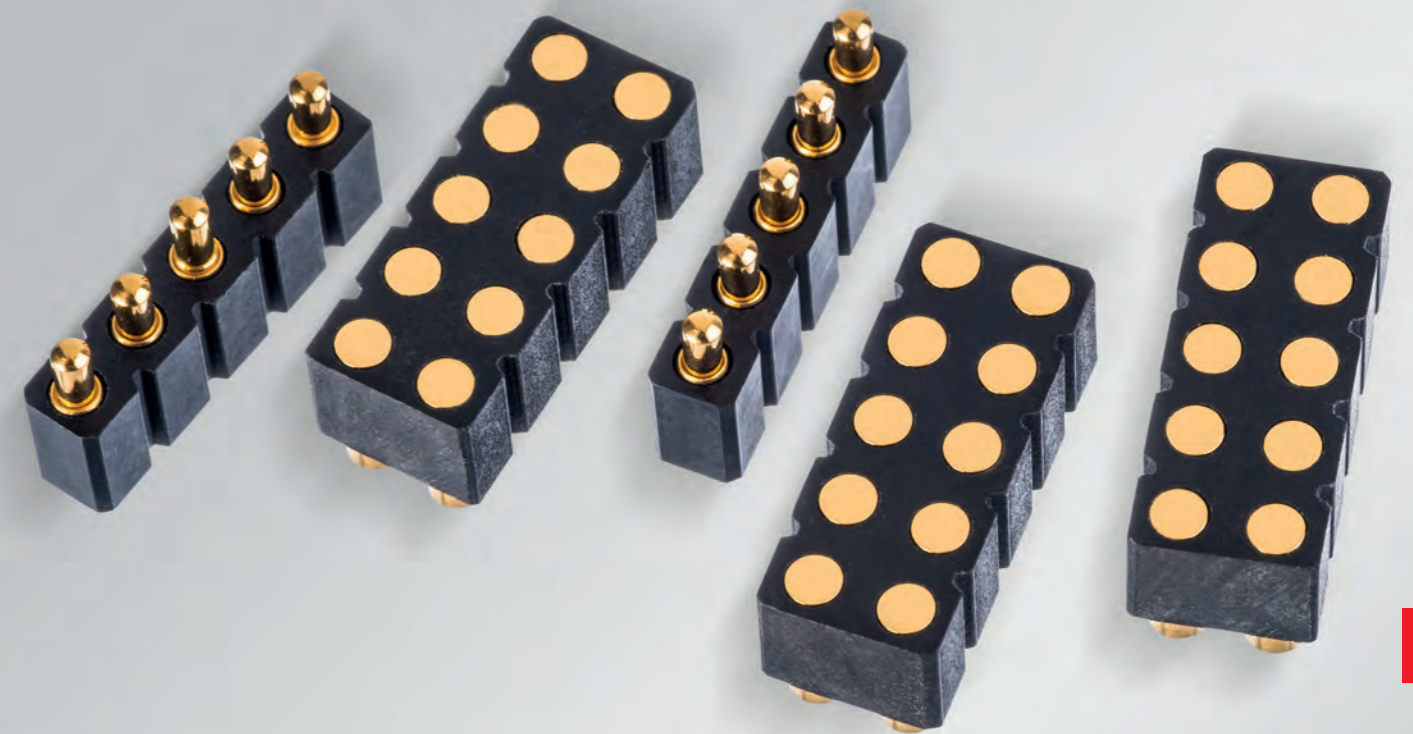

Series 5322 - FKB

Interface Pin Blocks 100 mil / 2.54 mm

Interface Pin Blocks 100 mil / 2.54 mm

Series 5322 - PKB

BENEFIT

- Short, compact size
- Board-to-board contacting
- For use in charging units
- 1- to 20-poles available

MECHANICAL DATA

| | |
|--------------------------------|-------------------|
| Center | 2.54 mm / 100 mil |
| Full Travel | 1.40 mm |
| Working Travel | 0.70 mm |
| Pre-Loaded Spring Force | 0.25 N |
| Spring Force at Working Travel | 0.85 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.5 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|------------------|---------------------------|
| Barrel | Brass, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | Brass, gold plated |
| PAD-Contact | Brass, gold plated |
| Test Probe Block | HT-Plastic UL 94V-0 |

TAPE ON REEL (EN 60286-3)

| | |
|----------------------|---------------|
| Tape on reel width | 44 mm / 24 mm |
| Spooling diameter | 15" |
| Number of components | 800 |
| Pitch | 12 mm |



RATINGS

| | | |
|---------------|-------|-------|
| Rated Current | 3.5 A | 2.0 A |
|---------------|-------|-------|


Rated Voltage

| | | |
|------|-------|-------|
| - DC | 150 V | 150 V |
| - AC | 100 V | 100 V |


| | | |
|--------------------|-----------|-----------|
| Flammability Class | UL 94 V-0 | UL 94 V-0 |
|--------------------|-----------|-----------|

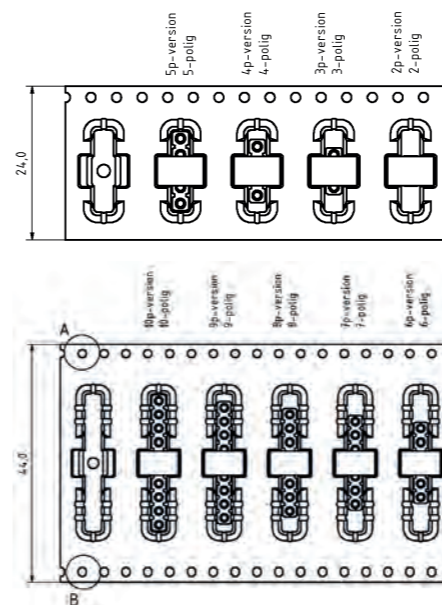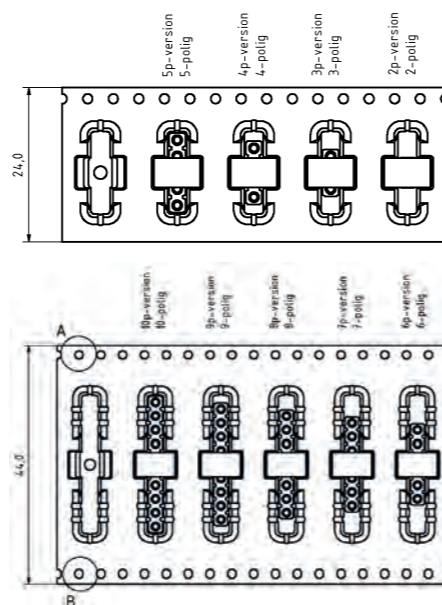


Soldering profile reflow

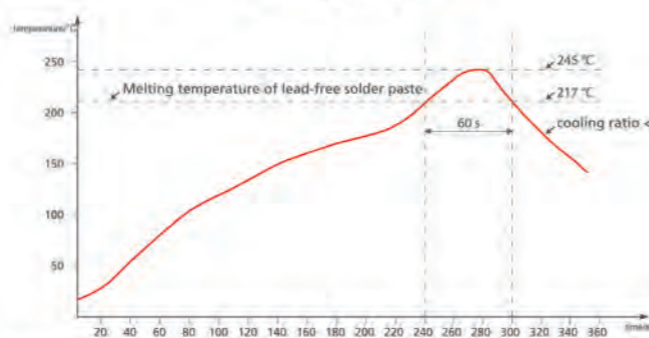


Soldering profile reflow

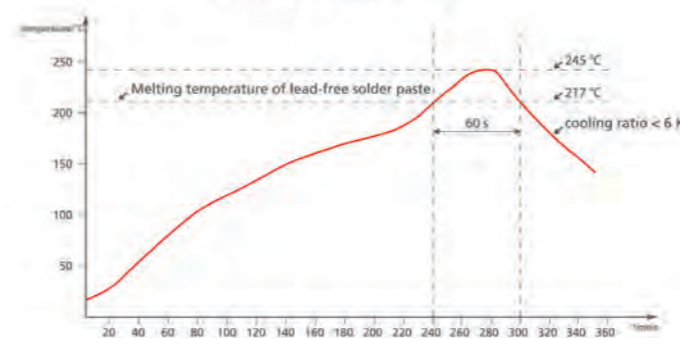

FKB5322/1

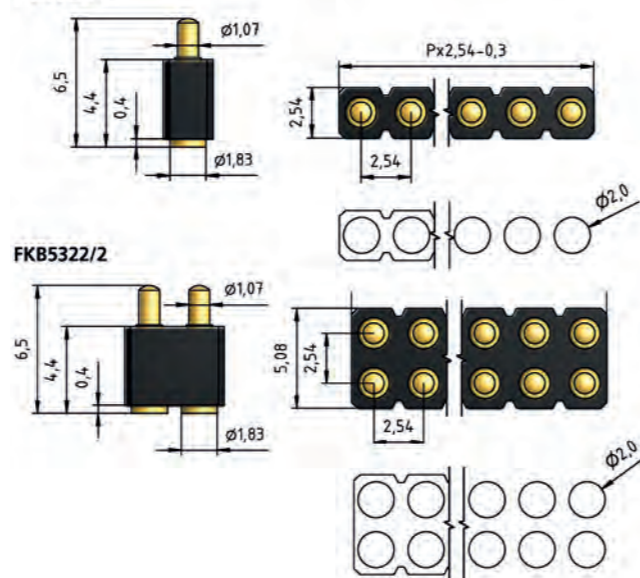

PKB5322/1

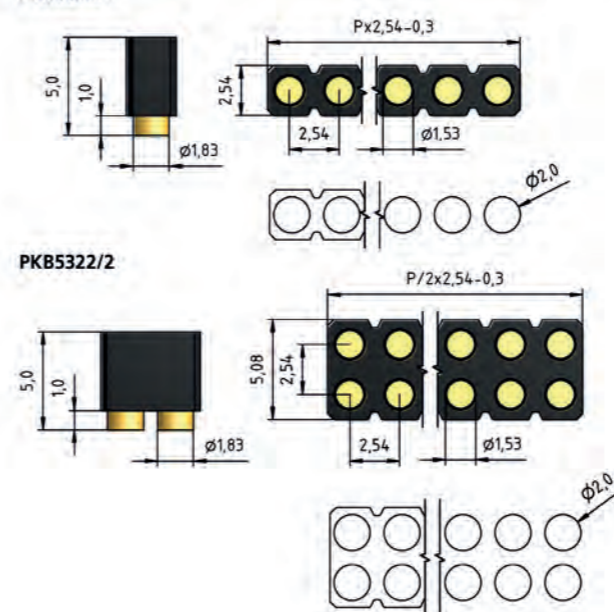

HOW TO ORDER

FKB5322 / 1 - 2 - 65 - R24
1 2 3 4 5

1 Series 2 Number of Rows 3 Number of Poles 4 Test Probes Length 5 Tape on Reel

HOW TO ORDER

PKB5322 / 1 - 2 - 50 - R24
1 2 3 4 5

1 Series 2 Number of Rows 3 Number of Poles 4 Test Probes Length 5 Tape on Reel

COAXIAL TEST PROBES

Coaxial Test Probes – also known as Kelvin Test Probes – consist of two independent test probes which are insulated from each other.

The inner conductor and outer probe operate and “give” independently of each other. Normally, the current flows via the outer probe, and the voltage drops are measured via the inner conductor.

In addition to a standard type which can be plugged in, we also offer a threaded type which can be screwed 2.0 mm in using a conventional tool (socket head wrench).

| SERIES | CENTER | PAGE |
|--------|-------------------|------|
| 5207 | 256 mil / 6.50 mm | 194 |
| 5207/G | 256 mil / 6.50 mm | 195 |



Series 5207

Coaxial Test Probe 256 mil / 6.5 mm

Coaxial Test Probe 256 mil / 6.5 mm

Series 5207/G

BENEFIT

- Four-pole measurement
- Compact design
- Inner and outer conductor are spring-loaded independently of each other

MECHANICAL DATA • INNER CONTACT

| | |
|--------------------------------|-------------------|
| Center | 6.50 mm / 256 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 3.50 mm |
| Working Travel | 3.00 mm |
| Pre-Loaded Spring Force | 0.80 N |
| Spring Force at Working Travel | 1.50 N |

MECHANICAL DATA • RING CONTACT

| | |
|--------------------------------|-------------------|
| Center | 6.50 mm / 256 mil |
| Full Travel | 2.50 mm |
| Working Travel | 2.00 mm |
| Pre-Loaded Spring Force | 3.00 N |
| Spring Force at Working Travel | 5.00 N |

ELECTRICAL DATA • INNER CONTACT

| | |
|-------------------------------|-----------|
| Max. Current Rating | 1.0 A |
| Typical Continuity Resistance | ≤ 10 mOhm |
| Typical Insulating Voltage | 800 V |

ELECTRICAL DATA • RING CONTACT

| | |
|-------------------------------|-----------|
| Max. Current Rating | 6.0 A |
| Typical Continuity Resistance | ≤ 10 mOhm |
| Typical Insulating Voltage | 800 V |

MATERIALS

| | |
|-----------------------|-----------------------------|
| Barrel | CuBe, gold plated |
| Spring | Spring Steel, silver plated |
| Plunger Inner Contact | Steel, gold plated |
| Plunger Ring Contact | CuBe, gold plated |
| Receptacle | Brass, gold plated |
| Connection Element | Brass, tin plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 4.69 mm |
| HGW 2372 (Glass filled material) | 4.70 mm |

TIP STYLE · DIAMETER · PLATING



| | |
|---------------|---------------|
| D | T |
| 1.00x1.50C Au | 1.00x0.50C Au |

TIP STYLE · DIAMETER · PLATING



| | |
|---------------|---------------|
| D | T |
| 1.00x1.50C Au | 1.00x0.50C Au |

BENEFIT

- Four-pole measurement
- Compact design
- Screwable type
- Inner and outer conductor are spring-loaded independently of each other

MECHANICAL DATA • INNER CONTACT

| | |
|--------------------------------|-------------------|
| Center | 6.50 mm / 256 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 3.50 mm |
| Working Travel | 3.00 mm |
| Pre-Loaded Spring Force | 0.80 N |
| Spring Force at Working Travel | 1.50 N |

MECHANICAL DATA • RING CONTACT

| | |
|--------------------------------|-------------------|
| Center | 6.50 mm / 256 mil |
| Full Travel | 2.50 mm |
| Working Travel | 2.00 mm |
| Pre-Loaded Spring Force | 3.00 N |
| Spring Force at Working Travel | 5.00 N |

ELECTRICAL DATA • INNER CONTACT

| | |
|-------------------------------|-----------|
| Max. Current Rating | 6.0 A |
| Typical Continuity Resistance | ≤ 10 mOhm |
| Typical Insulating Voltage | 800 V |

ELECTRICAL DATA • RING CONTACT

| | |
|-------------------------------|-----------|
| Max. Current Rating | 6.0 A |
| Typical Continuity Resistance | ≤ 10 mOhm |
| Typical Insulating Voltage | 800 V |

MATERIALS







| | |
|-----------------------|-----------------------------|
| Barrel | CuBe, gold plated |
| Spring | Spring Steel, silver plated |
| Plunger Inner Contact | Steel, gold plated |
| Plunger Ring Contact | CuBe, gold plated |
| Receptacle | Brass, gold plated |
| Connection Element | Brass, tin plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 5.49 mm |
| HGW 2372 (Glass filled material) | 5.50 mm |

AVAILABLE SCREW TOOLS

| | |
|----------------------------|-------------------|
| Article Designation | max. Tip-Ø |
| Hexagon Socket Key 2 mm | all |

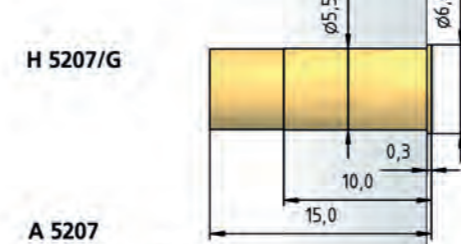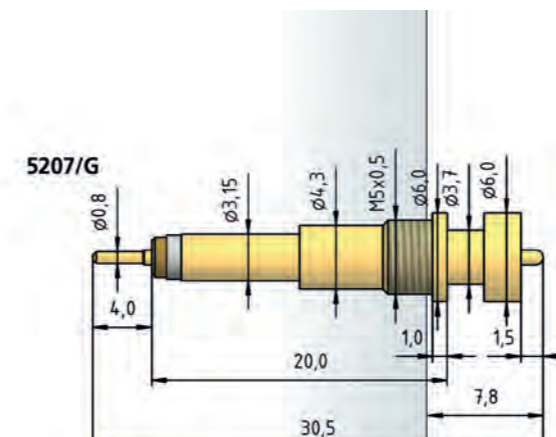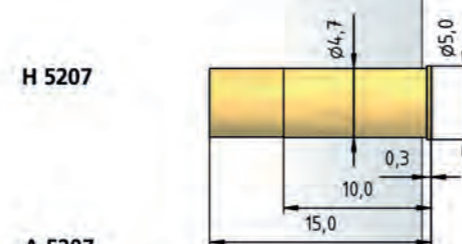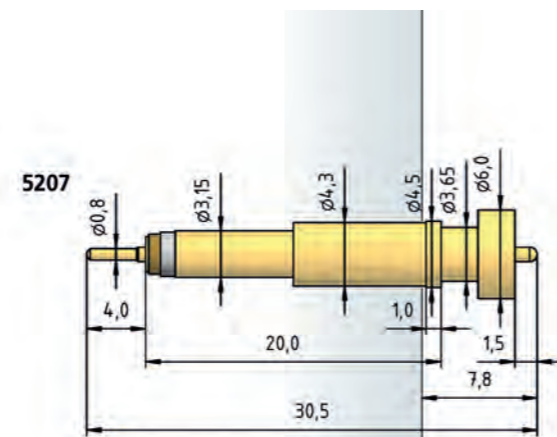

HOW TO ORDER

| | | | | | | | | | | |
|------|---|---|---|-------|---|----|------|------|-----|---|
| 5207 | - | D | - | 6.5 N | - | Au | 1.0x | 1.5/ | 6.0 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | |

1 Series 2 Tip Style 3 Total Spring Force (Spring Force Ring Contact + Inner Contact) 4 Tip Plating 5 Inner Tip Diameter 6 Tip Height 7 Ring Contact Diameter 8 Ring Contact Material (only for CuBe)

HOW TO ORDER

| | | | | | | | | | | | |
|-------|---|---|---|---|-------|---|----|------|------|-----|---|
| 5207/ | G | - | D | - | 6.5 N | - | Au | 1.0x | 1.5/ | 6.0 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | | |

1 Series 2 Threaded Design 3 Tip Style 4 Total Spring Force (Spring Force Ring Contact + Inner Contact) 5 Tip Plating 6 Inner Tip Diameter 7 Tip Height 8 Ring Contact Diameter 9 Ring Contact Material (only for CuBe)

HIGH-FREQUENCY TEST PROBES

High-Frequency Test Probes (HF-TP) consist of sprung inner and outer conductors that are arranged coaxially to one another.

This arrangement is optimal for the transmission of high-frequency signals because the electromagnetic field that is required to transport the energy is restricted to the area between the inner and outer conductors. The advantage is that electromagnetic emissions and parasitic induction are effectively suppressed. Specially matched geometric relationships and high precision in manufacture allow the transmission of high-frequency signals with low emissions and losses. For that reason the High-Frequency Test Probes of the 7840 / 7860 series are matched to suit high-frequency systems with an impedance of 50 Ohms. In the same way the geometry and dimensions of the probe heads of the inner and outer conductors are also designed to suit the relevant test piece.

High-Frequency Test Probes are compact, space-saving and solid. As a result they are ideally suited for economically carrying out sensitive measuring tasks involving high-frequencies. Furthermore, their modular construction allows the inner and outer conductors to be changed.

High-Frequency Test Probes are available both in plug-in and screw-type form for use when subjected to disturbing forces that act axially (vibration, impacts and the like). For both types there are matching receptacles that allow fast and secure installation and can be changed easily.

High-Frequency Test Probes have a practical connecting bush for connection to a test system, permitting quick contact creation through standardised MCX miniature plugs, and without soldering or other complicated procedures. These MCX plugs are available ready assembled with a flexible high-frequency cable of the Multiflex type, at the end of which an SMA cable plug, for example, is connected.



Here you will find the product video for replacement outer/inner conductor Series 7840 / 7860.

| SERIES | PAGE |
|--|------|
| 7840 · 7840/G - PCB Contact | 198 |
| 7860 · 7860/G - Z1 - MM8130 · MM8430 · MS156 | 199 |
| 7860 · 7860/G - Z2 - MM8130 · MM8430 · MS156 | 200 |
| 7860 · 7860/G - Z3 - U.FL-m | 201 |
| 7860 · 7860/G - Z4 - R-SMA-m | 202 |
| 7860 · 7860/G - Z5 - MCX-f | 203 |
| 7860 · 7860/G - Z6 - SMA-f | 204 |
| 7860 · 7860/G - Z7 - SMB-m | 205 |
| 7860 · 7860/G - Z8 - SMB-f | 206 |
| 7860 · 7860/G - Z9 - SMC-m | 207 |
| 7860 · 7860/G - Z25 - FAKRA Plug | 208 |
| 7860 · 7860/G - Z20 - FAKRA Socket | 209 |



Series 7840 • 7840/G

High Frequency Test Probe - Impedance 50 Ohm - up to 4 GHz

BENEFIT

- For high frequency measurements
- Compact design
- Also screwable type
- Inner and outer conductor are interchangeable of each other
- Inner conductor rigid / outer conductor independent

MECHANICAL DATA • SPRING-LOADED PROBE TIP

| | |
|--------------------------------|----------|
| Full Travel | 1.50 mm |
| Working Travel | 1.00 mm |
| Pre-Loaded Spring Force | 2x0.40 N |
| Spring Force at Working Travel | 2x0.80 N |

MECHANICAL DATA • OUTER CONDUCTOR

| | |
|--------------------------------|--------------------|
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 1.50/ 3.00/ 4.00 N |
| Spring Force at Working Travel | 4.00/ 6.00/ 8.00 N |

TOTAL SPRING FORCE

| | |
|-------------------------------------|--------------------|
| Full Spring Force at Working Travel | 5.60/ 7.60/ 9.60 N |
|-------------------------------------|--------------------|

ELECTRICAL DATA

| | |
|-----------------|-------------|
| Impedance | 50 Ohm |
| Frequency Range | up to 4 GHz |

MATERIALS

| | |
|------------|--------------------|
| Barrel | Brass, gold plated |
| Spring | Steel, gold plated |
| Plunger | CuBe, gold plated |
| Probe Tips | Steel, gold plated |


AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 7840/G-8.0 | 8.0 |

CABLE DATA

| | |
|------------------------------|--------------|
| Type | Multiflex 86 |
| Length | 750 mm |
| Connector Test Probe | MCX |
| Connector Testing Technology | SMA |

PCB-CONTACT

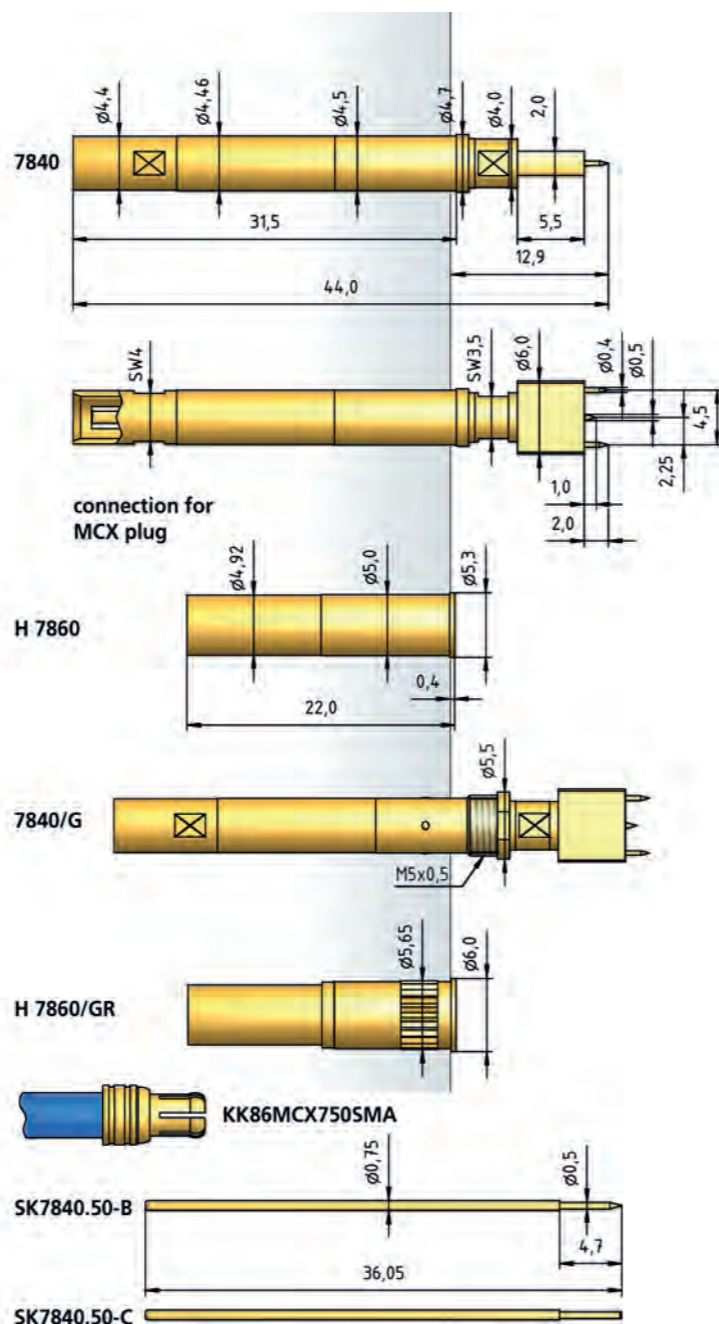

HOW TO ORDER • COMPLETE TEST PROBE

7840/ G - Z51 B - 5.6 N - Au - 6.0 C /0.5
 1 2 3 4 5 6 7 8 9

1 Series 2 Variant treaded Design 3 Outer Conductor Tip 4 Inner Conductor Tip 5 Total Spring Force 6 Tip Plating 7 Outer Tip Diameter 8 Tip Material (only for CuBe) 9 Inner Tip Diameter

HOW TO ORDER • INNER CONDUCTOR


SK 7840.50 - B - Au - 0.5
 1 2 3 4

1 Series 2 Inner Conductor Tip 3 Tip Plating 4 Tip Diameter

High Frequency Test Probe - Impedance 50 Ohm - up to 6 GHz

Series 7860 • 7860/G

MM8130 • MM8430 • MS156

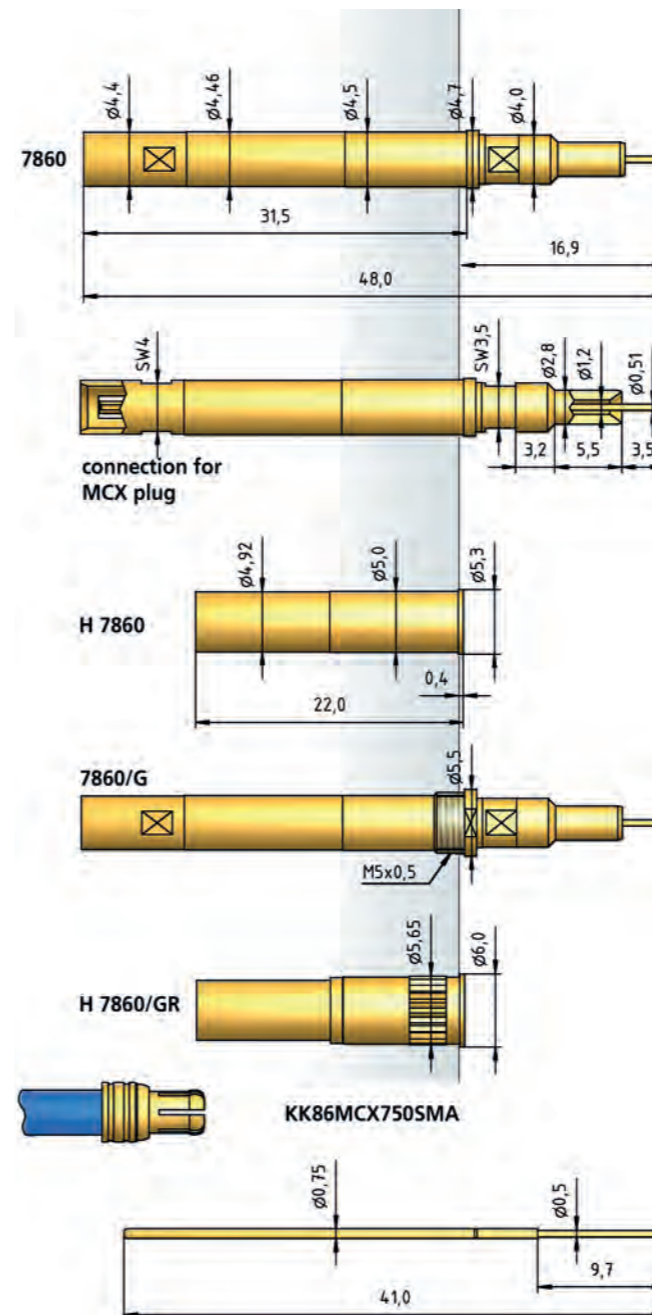

BENEFIT

- For high frequency measurements
- Compact design
- Also screwable type
- Inner conductor and outer tip are independently of each other and interchangeable

MECHANICAL DATA • INNER CONDUCTOR

| | |
|--------------------------------|--------------|
| Full Travel | 3.70 mm |
| Working Travel | 2.00 mm |
| Pre-Loaded Spring Force | 0.65/ 0.95 N |
| Spring Force at Working Travel | 1.30/ 2.00 N |

MECHANICAL DATA • OUTER CONDUCTOR

| | |
|--------------------------------|--------------------|
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 1.50/ 3.00/ 4.00 N |
| Spring Force at Working Travel | 4.00/ 6.00/ 8.00 N |

TOTAL SPRING FORCE

| | |
|-------------------------------------|---------------------------------------|
| Full Spring Force at Working Travel | 5.30/ 6.00/ 7.30/ 8.00/ 9.30/ 10.00 N |
|-------------------------------------|---------------------------------------|

ELECTRICAL DATA

| | |
|-----------------|-------------|
| Impedance | 50 Ohm |
| Frequency Range | up to 6 GHz |

MATERIALS

| | |
|---------|--------------------|
| Barrel | Brass, gold plated |
| Spring | Steel, gold plated |
| Plunger | CuBe, gold plated |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 7860/G-8.0 | 8.0 |

CABLE DATA

| | |
|------------------------------|--------------|
| Type | Multiflex 86 |
| Length | 750 mm |
| Connector Test Probe | MCX |
| Connector Testing Technology | SMA |

HOW TO ORDER • INNER CONDUCTOR

7860 - DL - 1.3 N - Au - 0.5 C
 1 2 3 4 5 6

1 Series 2 Inner Conductor Tip 3 Spring Force 4 Tip Plating 5 Tip Diameter 6 Tip Material (only for CuBe)

HOW TO ORDER • COMPLETE TEST PROBE

7860/ G - Z1 DL - 5.3 N - Au - 2.8/ 0.5 C
 1 2 3 4 5 6 7 8 9

1 Series 2 Variant treaded Design 3 Outer Conductor Tip 4 Inner Conductor Tip 5 Total Spring Force 6 Tip Plating 7 Outer Tip Diameter 8 Inner Tip Diameter 9 Tip Material (only for CuBe)

Series 7860 • 7860/G

High Frequency Test Probe - Impedance 50 Ohm - up to 6 GHz

High Frequency Test Probe - Impedance 50 Ohm - up to 6 GHz

Series 7860 • 7860/G

BENEFIT

- For high frequency measurements
- Compact design
- Also screwable type
- Inner conductor and outer tip are independently of each other and interchangeable

MECHANICAL DATA • INNER CONDUCTOR

| | |
|--------------------------------|--------------|
| Full Travel | 3.70 mm |
| Working Travel | 2.00 mm |
| Pre-Loaded Spring Force | 0.65/ 0.95 N |
| Spring Force at Working Travel | 1.30/ 2.00 N |

MECHANICAL DATA • OUTER CONDUCTOR

| | |
|--------------------------------|--------------------|
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 1.50/ 3.00/ 4.00 N |
| Spring Force at Working Travel | 4.00/ 6.00/ 8.00 N |

TOTAL SPRING FORCE

| | |
|-------------------------------------|---------------------------------------|
| Full Spring Force at Working Travel | 5.30/ 6.00/ 7.30/ 8.00/ 9.30/ 10.00 N |
|-------------------------------------|---------------------------------------|

ELECTRICAL DATA • INNER CONDUCTOR

| | |
|-----------------|-------------|
| Impedance | 50 Ohm |
| Frequency Range | up to 6 GHz |

MATERIALS

| | |
|---------|--------------------|
| Barrel | Brass, gold plated |
| Spring | Steel, gold plated |
| Plunger | CuBe, gold plated |


AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 7860/G-8.0 | 8.0 |


CABLE DATA

| | |
|------------------------------|--------------|
| Type | Multiflex 86 |
| Length | 750 mm |
| Connector Test Probe | MCX |
| Connector Testing Technology | SMA |

MM8130 • MM8430 • MS156

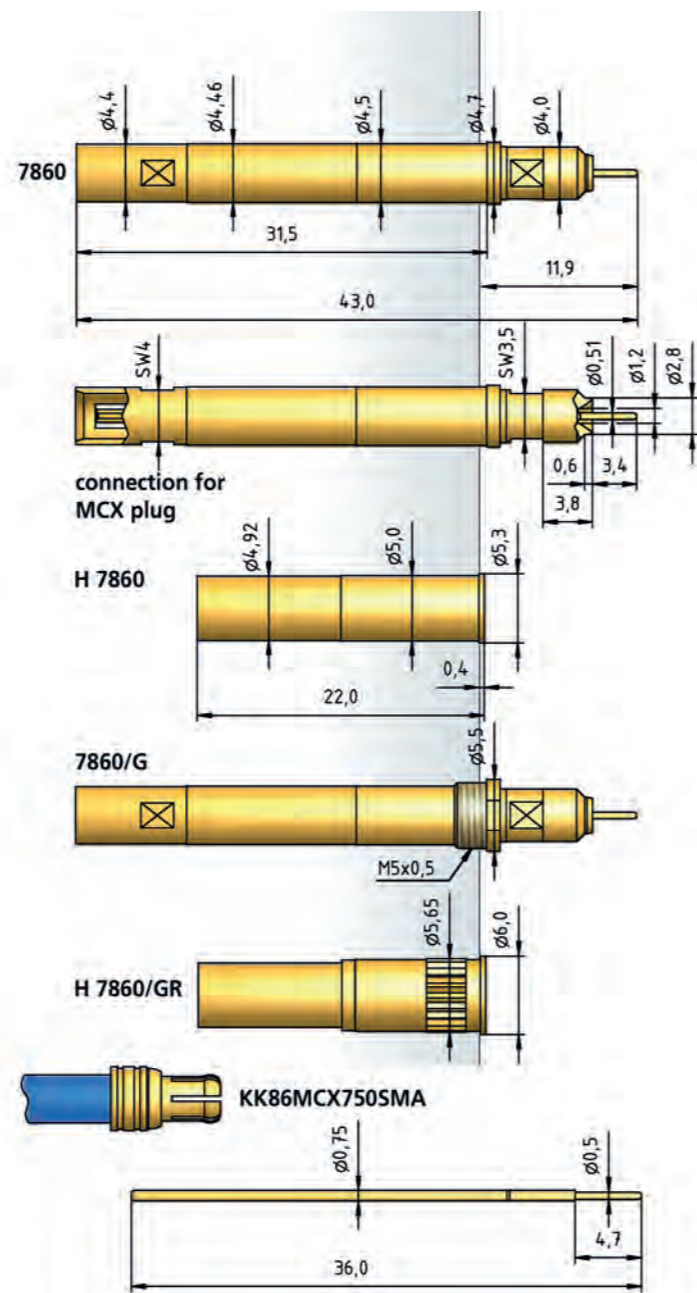

U.FL-M

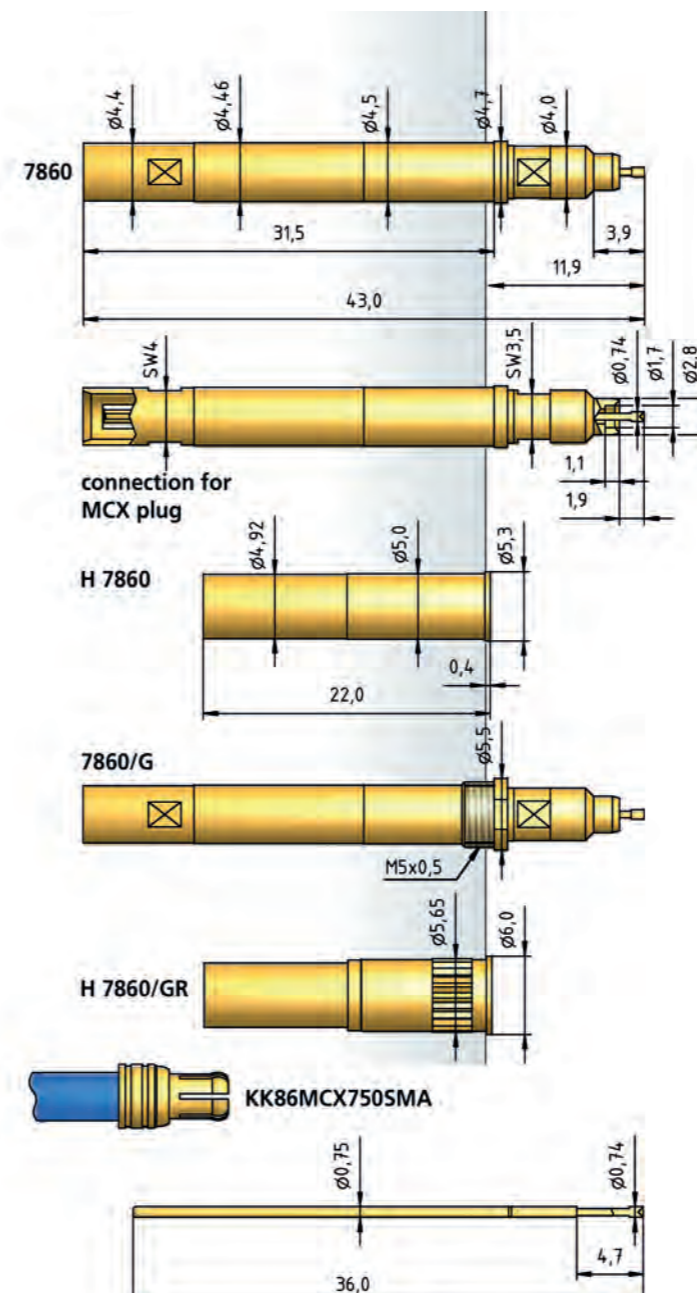

BENEFIT

- For high frequency measurements
- Compact design
- Also screwable type
- Inner conductor and outer tip are independently of each other and interchangeable

MECHANICAL DATA • INNER CONDUCTOR

| | |
|--------------------------------|--------------|
| Full Travel | 3.70 mm |
| Working Travel | 2.00 mm |
| Pre-Loaded Spring Force | 0.65/ 0.95 N |
| Spring Force at Working Travel | 1.30/ 2.00 N |

MECHANICAL DATA • OUTER CONDUCTOR

| | |
|--------------------------------|--------------------|
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 1.50/ 3.00/ 4.00 N |
| Spring Force at Working Travel | 4.00/ 6.00/ 8.00 N |

TOTAL SPRING FORCE

| | |
|-------------------------------------|---------------------------------------|
| Full Spring Force at Working Travel | 5.30/ 6.00/ 7.30/ 8.00/ 9.30/ 10.00 N |
|-------------------------------------|---------------------------------------|

ELECTRICAL DATA • INNER CONDUCTOR

| | |
|-----------------|-------------|
| Impedance | 50 Ohm |
| Frequency Range | up to 6 GHz |

MATERIALS

| | |
|---------|--------------------|
| Barrel | Brass, gold plated |
| Spring | Steel, gold plated |
| Plunger | CuBe, gold plated |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 7860/G-8.0 | 8.0 |

CABLE DATA

| | |
|------------------------------|--------------|
| Type | Multiflex 86 |
| Length | 750 mm |
| Connector Test Probe | MCX |
| Connector Testing Technology | SMA |

HOW TO ORDER • COMPLETE TEST PROBE

| | | | | | | | | | | | | |
|-------|---|---|----|---|---|-------|---|----|---|------|-----|---|
| 7860/ | G | - | Z2 | D | - | 5.3 N | - | Au | - | 2.8/ | 0.5 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | | | |

- 1 Series 2 Variant treaded Design 3 Outer Conductor Tip 4 Inner Conductor
- Tip 5 Total Spring Force 6 Tip Plating 7 Outer Tip Diameter
- 8 Inner Tip Diameter 9 Tip Material (only for CuBe)

HOW TO ORDER • INNER CONDUCTOR

| | | | | | | | | | |
|------|---|---|---|-------|---|----|---|-----|---|
| 7860 | - | D | - | 1.3 N | - | Au | - | 0.5 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | | | | |

- 1 Series 2 Inner Conductor Tip 3 Spring Force 4 Tip Plating 5 Tip Diameter
- 6 Tip Material (only for CuBe)

HOW TO ORDER • INNER CONDUCTOR

| | | | | | | | | | |
|------|---|---|---|-------|---|----|---|------|---|
| 7860 | - | A | - | 1.3 N | - | Au | - | 0.74 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | | | | |

- 1 Series 2 Inner Conductor Tip 3 Spring Force 4 Tip Plating 5 Tip Diameter
- 6 Tip Material (only for CuBe)

HOW TO ORDER • COMPLETE TEST PROBE

| | | | | | | | | | | | | |
|-------|---|---|----|---|---|-------|---|----|---|------|------|---|
| 7860/ | G | - | Z3 | A | - | 5.3 N | - | Au | - | 2.8/ | 0.74 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | | | |

- 1 Series 2 Variant treaded Design 3 Outer Conductor Tip 4 Inner Conductor
- Tip 5 Total Spring Force 6 Tip Plating 7 Outer Tip Diameter
- 8 Inner Tip Diameter 9 Tip Material (only for CuBe)

Series 7860 • 7860/G

High Frequency Test Probe - Impedance 50 Ohm - up to 6 GHz

High Frequency Test Probe - Impedance 50 Ohm - up to 6 GHz

Series 7860 • 7860/G

BENEFIT

- For high frequency measurements
- Compact design
- Also screwable type
- Inner conductor and outer tip are independently of each other and interchangeable

MECHANICAL DATA • INNER CONDUCTOR

| | |
|--------------------------------|--------------|
| Full Travel | 3.70 mm |
| Working Travel | 2.00 mm |
| Pre-Loaded Spring Force | 0.65/ 0.95 N |
| Spring Force at Working Travel | 1.30/ 2.00 N |

MECHANICAL DATA • OUTER CONDUCTOR

| | |
|--------------------------------|--------------------|
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 1.50/ 3.00/ 4.00 N |
| Spring Force at Working Travel | 4.00/ 6.00/ 8.00 N |

TOTAL SPRING FORCE

| | |
|-------------------------------------|---------------------------------------|
| Full Spring Force at Working Travel | 5.30/ 6.00/ 7.30/ 8.00/ 9.30/ 10.00 N |
|-------------------------------------|---------------------------------------|

ELECTRICAL DATA • INNER CONDUCTOR

| | |
|-----------------|-------------|
| Impedance | 50 Ohm |
| Frequency Range | up to 6 GHz |

MATERIALS

| | |
|---------|--------------------|
| Barrel | Brass, gold plated |
| Spring | Steel, gold plated |
| Plunger | CuBe, gold plated |



AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 7860/G-8.0 | 8.0 |



CABLE DATA

| | |
|------------------------------|--------------|
| Type | Multiflex 86 |
| Length | 750 mm |
| Connector Test Probe | MCX |
| Connector Testing Technology | SMA |

R-SMA-M

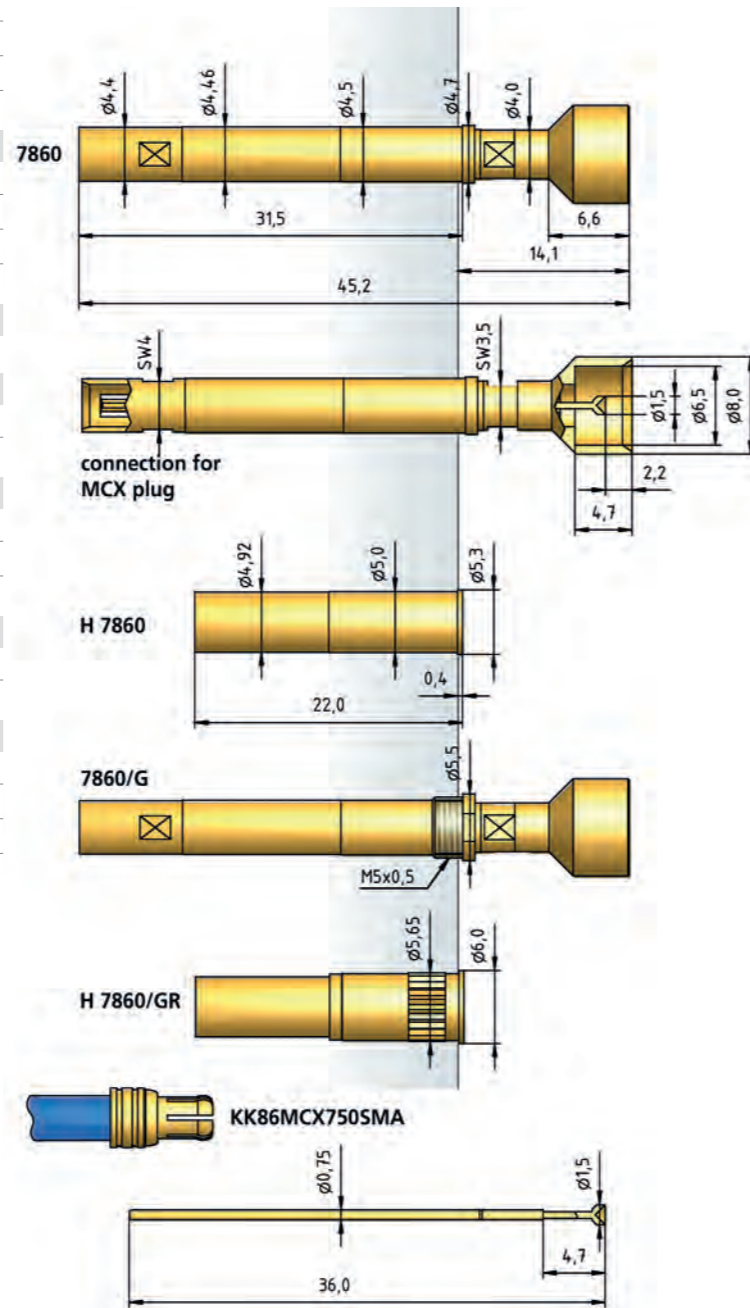

MCX-F

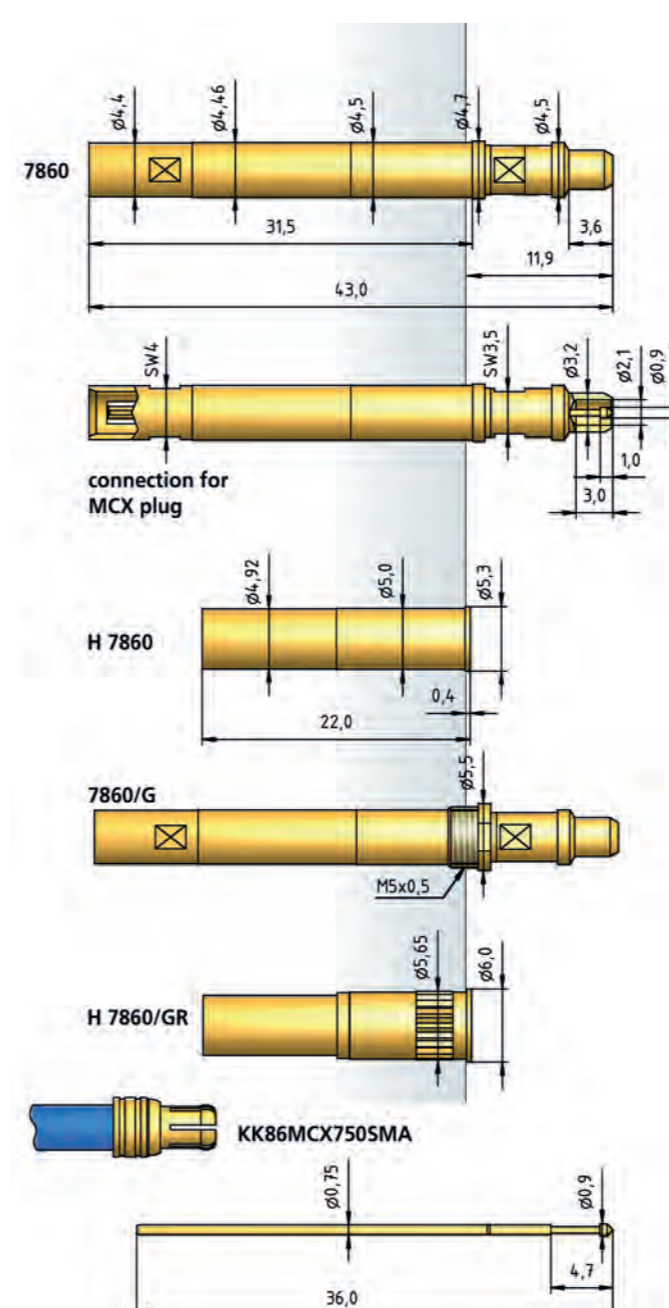

BENEFIT

- For high frequency measurements
- Compact design
- Also screwable type
- Inner conductor and outer tip are independently of each other and interchangeable

MECHANICAL DATA • INNER CONDUCTOR

| | |
|--------------------------------|--------------|
| Full Travel | 3.70 mm |
| Working Travel | 2.00 mm |
| Pre-Loaded Spring Force | 0.65/ 0.95 N |
| Spring Force at Working Travel | 1.30/ 2.00 N |

MECHANICAL DATA • OUTER CONDUCTOR

| | |
|--------------------------------|--------------------|
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 1.50/ 3.00/ 4.00 N |
| Spring Force at Working Travel | 4.00/ 6.00/ 8.00 N |

TOTAL SPRING FORCE

| | |
|-------------------------------------|---------------------------------------|
| Full Spring Force at Working Travel | 5.30/ 6.00/ 7.30/ 8.00/ 9.30/ 10.00 N |
|-------------------------------------|---------------------------------------|

ELECTRICAL DATA • INNER CONDUCTOR

| | |
|-----------------|-------------|
| Impedance | 50 Ohm |
| Frequency Range | up to 6 GHz |

MATERIALS

| | |
|---------|--------------------|
| Barrel | Brass, gold plated |
| Spring | Steel, gold plated |
| Plunger | CuBe, gold plated |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 7860/G-8.0 | 8.0 |

CABLE DATA

| | |
|------------------------------|--------------|
| Type | Multiflex 86 |
| Length | 750 mm |
| Connector Test Probe | MCX |
| Connector Testing Technology | SMA |

HOW TO ORDER • COMPLETE TEST PROBE

| | | | | | | | | | | | | |
|-------|---|---|----|---|---|-------|---|----|---|------|-----|---|
| 7860/ | G | - | Z4 | A | - | 5.3 N | - | Au | - | 8.0/ | 1.5 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | | | |

- 1 Series 2 Variant treaded Design 3 Outer Conductor Tip 4 Inner Conductor Tip 5 Total Spring Force 6 Tip Plating 7 Outer Tip Diameter 8 Inner Tip Diameter 9 Tip Material (only for CuBe)

HOW TO ORDER • INNER CONDUCTOR

| | | | | | | | | | |
|------|---|---|---|-------|---|----|---|-----|---|
| 7860 | - | A | - | 1.3 N | - | Au | - | 1.5 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | | | | |

- 1 Series 2 Inner Conductor Tip 3 Spring Force 4 Tip Plating 5 Tip Diameter 6 Tip Material (only for CuBe)

HOW TO ORDER • INNER CONDUCTOR

| | | | | | | | | | |
|------|---|---|---|-------|---|----|---|-----|---|
| 7860 | - | E | - | 1.3 N | - | Au | - | 0.9 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | | | | |

- 1 Series 2 Inner Conductor Tip 3 Spring Force 4 Tip Plating 5 Tip Diameter 6 Tip Material (only for CuBe)

HOW TO ORDER • COMPLETE TEST PROBE

| | | | | | | | | | | | | |
|-------|---|---|----|---|---|-------|---|----|---|------|-----|---|
| 7860/ | G | - | Z5 | E | - | 5.3 N | - | Au | - | 3.2/ | 0.9 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | | | |

- 1 Series 2 Variant treaded Design 3 Outer Conductor Tip 4 Inner Conductor Tip 5 Total Spring Force 6 Tip Plating 7 Outer Tip Diameter 8 Inner Tip Diameter 9 Tip Material (only for CuBe)

Series 7860 • 7860/G

High Frequency Test Probe - Impedance 50 Ohm - up to 6 GHz

High Frequency Test Probe - Impedance 50 Ohm - up to 6 GHz

Series 7860 • 7860/G

BENEFIT

- For high frequency measurements
- Compact design
- Also screwable type
- Inner conductor and outer tip are independently of each other and interchangeable

MECHANICAL DATA • INNER CONDUCTOR

| | |
|--------------------------------|--------------|
| Full Travel | 3.70 mm |
| Working Travel | 2.00 mm |
| Pre-Loaded Spring Force | 0.65/ 0.95 N |
| Spring Force at Working Travel | 1.30/ 2.00 N |

MECHANICAL DATA • OUTER CONDUCTOR

| | |
|--------------------------------|--------------------|
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 1.50/ 3.00/ 4.00 N |
| Spring Force at Working Travel | 4.00/ 6.00/ 8.00 N |

TOTAL SPRING FORCE

| | |
|-------------------------------------|---------------------------------------|
| Full Spring Force at Working Travel | 5.30/ 6.00/ 7.30/ 8.00/ 9.30/ 10.00 N |
|-------------------------------------|---------------------------------------|

ELECTRICAL DATA • INNER CONDUCTOR

| | |
|-----------------|-------------|
| Impedance | 50 Ohm |
| Frequency Range | up to 6 GHz |

MATERIALS

| | |
|---------|--------------------|
| Barrel | Brass, gold plated |
| Spring | Steel, gold plated |
| Plunger | CuBe, gold plated |


AVAILABLE SCREW TOOLS

| | |
|---------------------|------------|
| Article Designation | max. Tip-∅ |
| WFS 7860/G-8.0 | 8.0 |


CABLE DATA

| | |
|------------------------------|--------------|
| Type | Multiflex 86 |
| Length | 750 mm |
| Connector Test Probe | MCX |
| Connector Testing Technology | SMA |

SMA-F

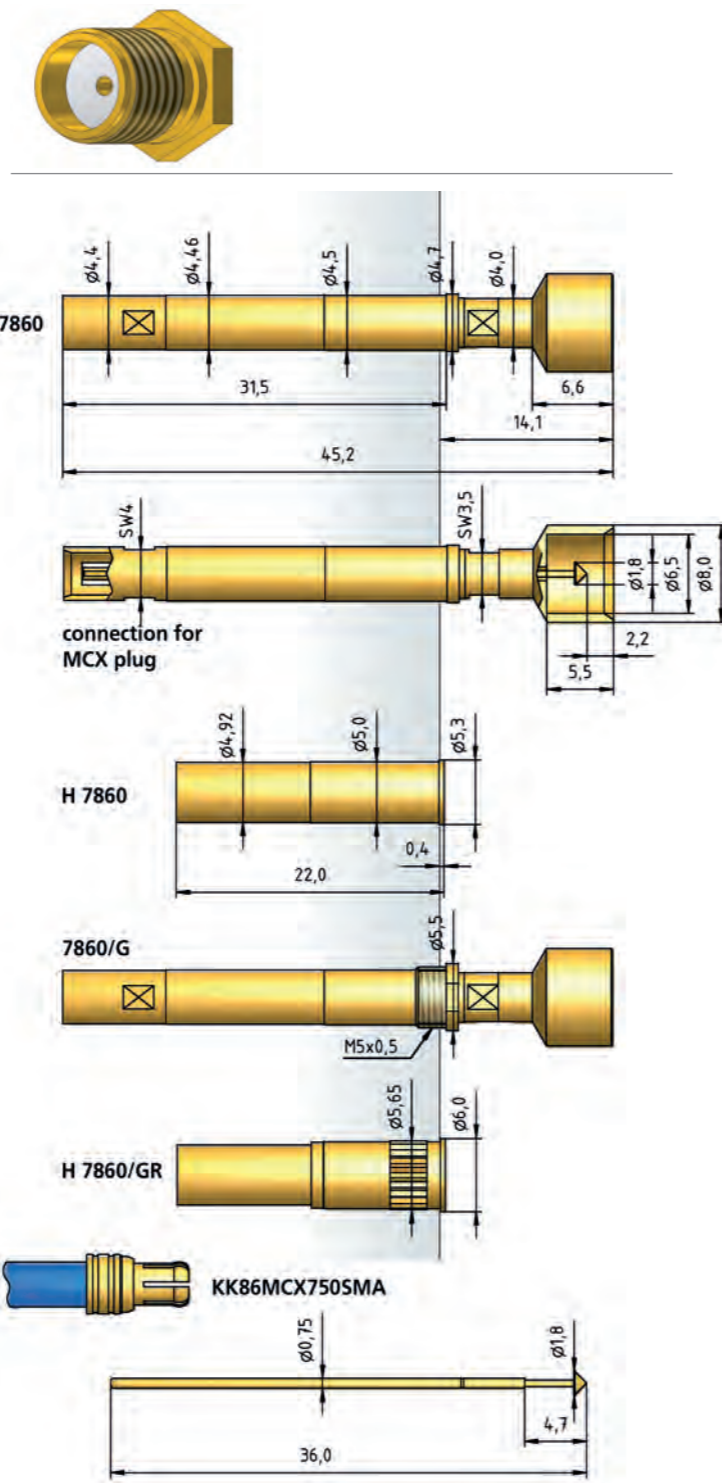

SMB-M

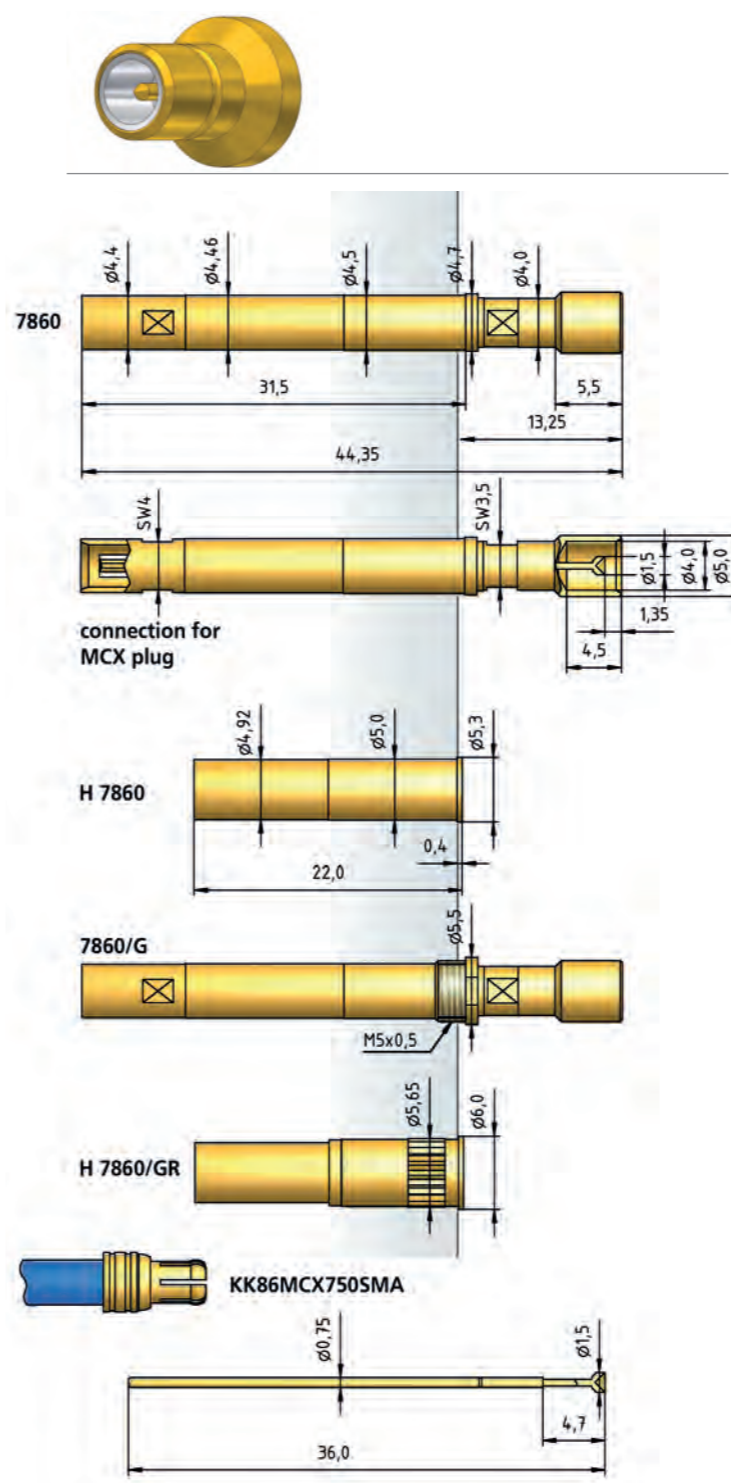

BENEFIT

- For high frequency measurements
- Compact design
- Also screwable type
- Inner conductor and outer tip are independently of each other and interchangeable

MECHANICAL DATA • INNER CONDUCTOR

| | |
|--------------------------------|--------------|
| Full Travel | 3.70 mm |
| Working Travel | 2.00 mm |
| Pre-Loaded Spring Force | 0.65/ 0.95 N |
| Spring Force at Working Travel | 1.30/ 2.00 N |

MECHANICAL DATA • OUTER CONDUCTOR

| | |
|--------------------------------|--------------------|
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 1.50/ 3.00/ 4.00 N |
| Spring Force at Working Travel | 4.00/ 6.00/ 8.00 N |

TOTAL SPRING FORCE

| | |
|-------------------------------------|---------------------------------------|
| Full Spring Force at Working Travel | 5.30/ 6.00/ 7.30/ 8.00/ 9.30/ 10.00 N |
|-------------------------------------|---------------------------------------|

ELECTRICAL DATA • INNER CONDUCTOR

| | |
|-----------------|-------------|
| Impedance | 50 Ohm |
| Frequency Range | up to 6 GHz |

MATERIALS

| | |
|---------|--------------------|
| Barrel | Brass, gold plated |
| Spring | Steel, gold plated |
| Plunger | CuBe, gold plated |

AVAILABLE SCREW TOOLS

| | |
|---------------------|------------|
| Article Designation | max. Tip-∅ |
| WFS 7860/G-8.0 | 8.0 |

CABLE DATA

| | |
|------------------------------|--------------|
| Type | Multiflex 86 |
| Length | 750 mm |
| Connector Test Probe | MCX |
| Connector Testing Technology | SMA |

HOW TO ORDER • COMPLETE TEST PROBE

7860/ G - Z6 E - 5.3 N - Au - 8.0/ 1.8 C
1 2 3 4 5 6 7 8 9

- 1 Series 2 Variant treaded Design 3 Outer Conductor Tip 4 Inner Conductor
- Tip 5 Total Spring Force 6 Tip Plating 7 Outer Tip Diameter
- 8 Inner Tip Diameter 9 Tip Material (only for CuBe)

HOW TO ORDER • INNER CONDUCTOR

7860 - E - 1.3 N - Au - 1.8 C
1 2 3 4 5 6

- 1 Series 2 Inner Conductor Tip 3 Spring Force 4 Tip Plating 5 Tip Diameter
- 6 Tip Material (only for CuBe)

HOW TO ORDER • INNER CONDUCTOR

7860 - A - 1.3 N - Au - 1.5 C
1 2 3 4 5 6

- 1 Series 2 Inner Conductor Tip 3 Spring Force 4 Tip Plating 5 Tip Diameter
- 6 Tip Material (only for CuBe)

HOW TO ORDER • COMPLETE TEST PROBE

7860/ G - Z7 A - 5.3 N - Au - 5.0/ 1.5 C
1 2 3 4 5 6 7 8 9

- 1 Series 2 Variant treaded Design 3 Outer Conductor Tip 4 Inner Conductor
- Tip 5 Total Spring Force 6 Tip Plating 7 Outer Tip Diameter
- 8 Inner Tip Diameter 9 Tip Material (only for CuBe)

Series 7860 • 7860/G

High Frequency Test Probe - Impedance 50 Ohm - up to 6 GHz

High Frequency Test Probe - Impedance 50 Ohm - up to 6 GHz

Series 7860 • 7860/G

BENEFIT

- For high frequency measurements
- Compact design
- Also screwable type
- Inner conductor and outer tip are independently of each other and interchangeable

MECHANICAL DATA • INNER CONDUCTOR

| | |
|--------------------------------|--------------|
| Full Travel | 3.70 mm |
| Working Travel | 2.00 mm |
| Pre-Loaded Spring Force | 0.65/ 0.95 N |
| Spring Force at Working Travel | 1.30/ 2.00 N |

MECHANICAL DATA • OUTER CONDUCTOR

| | |
|--------------------------------|--------------------|
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 1.50/ 3.00/ 4.00 N |
| Spring Force at Working Travel | 4.00/ 6.00/ 8.00 N |

TOTAL SPRING FORCE

| | |
|-------------------------------------|---------------------------------------|
| Full Spring Force at Working Travel | 5.30/ 6.00/ 7.30/ 8.00/ 9.30/ 10.00 N |
|-------------------------------------|---------------------------------------|

ELECTRICAL DATA • INNER CONDUCTOR

| | |
|-----------------|-------------|
| Impedance | 50 Ohm |
| Frequency Range | up to 6 GHz |

MATERIALS

| | |
|---------|--------------------|
| Barrel | Brass, gold plated |
| Spring | Steel, gold plated |
| Plunger | CuBe, gold plated |


AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 7860/G-8.0 | 8.0 |


CABLE DATA

| | |
|------------------------------|--------------|
| Type | Multiflex 86 |
| Length | 750 mm |
| Connector Test Probe | MCX |
| Connector Testing Technology | SMA |

SMB-F

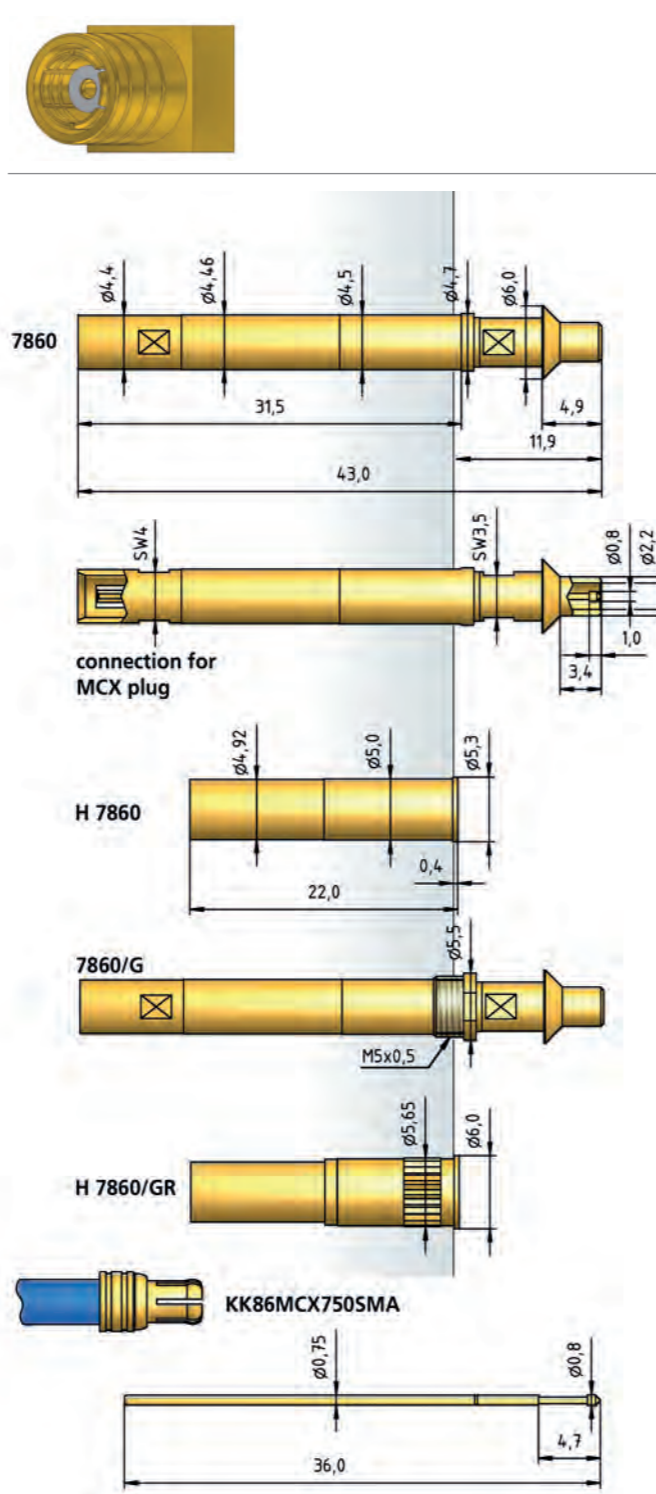

SMC-M

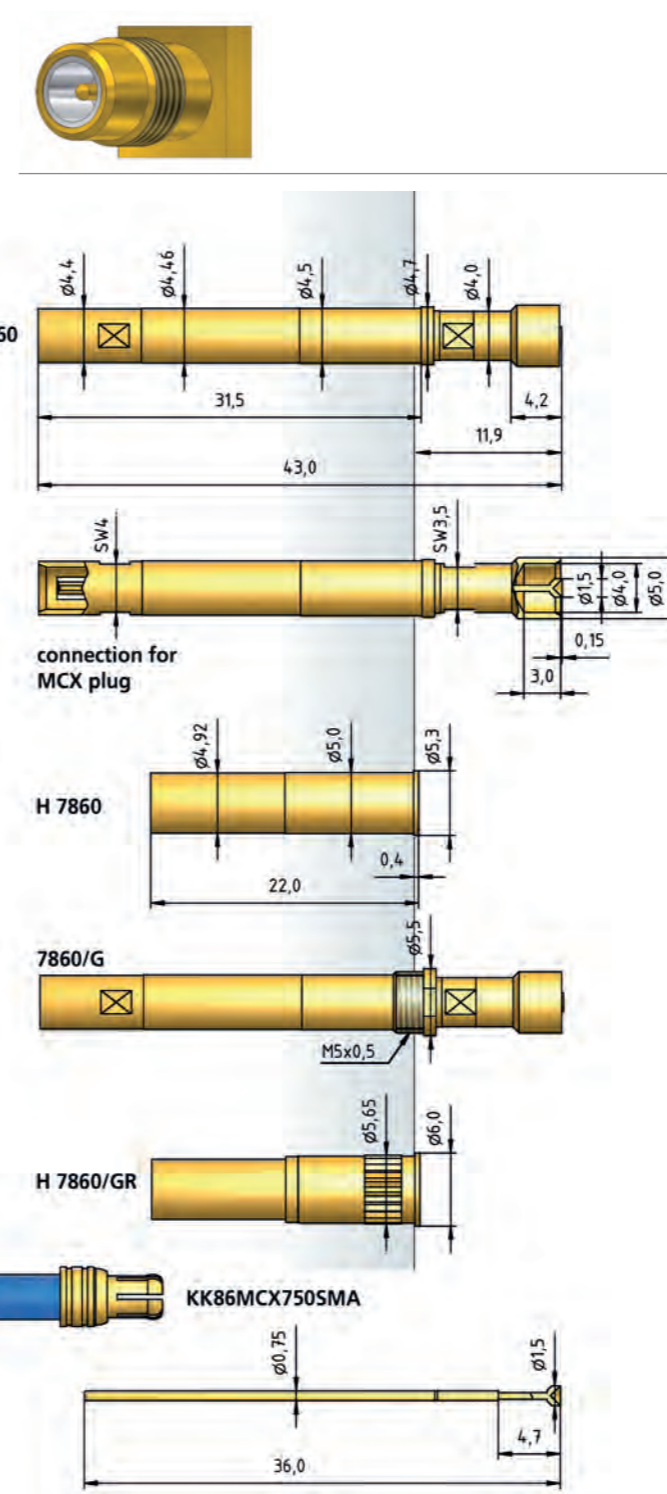

BENEFIT

- For high frequency measurements
- Compact design
- Also screwable type
- Inner conductor and outer tip are independently of each other and interchangeable

MECHANICAL DATA • INNER CONDUCTOR

| | |
|--------------------------------|--------------|
| Full Travel | 3.70 mm |
| Working Travel | 2.00 mm |
| Pre-Loaded Spring Force | 0.65/ 0.95 N |
| Spring Force at Working Travel | 1.30/ 2.00 N |

MECHANICAL DATA • OUTER CONDUCTOR

| | |
|--------------------------------|--------------------|
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 1.50/ 3.00/ 4.00 N |
| Spring Force at Working Travel | 4.00/ 6.00/ 8.00 N |

TOTAL SPRING FORCE

| | |
|-------------------------------------|---------------------------------------|
| Full Spring Force at Working Travel | 5.30/ 6.00/ 7.30/ 8.00/ 9.30/ 10.00 N |
|-------------------------------------|---------------------------------------|

ELECTRICAL DATA • INNER CONDUCTOR

| | |
|-----------------|-------------|
| Impedance | 50 Ohm |
| Frequency Range | up to 6 GHz |

MATERIALS

| | |
|---------|--------------------|
| Barrel | Brass, gold plated |
| Spring | Steel, gold plated |
| Plunger | CuBe, gold plated |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 7860/G-8.0 | 8.0 |

CABLE DATA

| | |
|------------------------------|--------------|
| Type | Multiflex 86 |
| Length | 750 mm |
| Connector Test Probe | MCX |
| Connector Testing Technology | SMA |

HOW TO ORDER • COMPLETE TEST PROBE

| | | | | | | | | | | | | |
|-------|---|---|----|---|---|-------|---|----|---|-------|-----|---|
| 7860/ | G | - | Z8 | E | - | 5.3 N | - | Au | - | 3.20/ | 0.8 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | | | |

- 1 Series 2 Variant treaded Design 3 Outer Conductor Tip 4 Inner Conductor
- Tip 5 Total Spring Force 6 Tip Plating 7 Outer Tip Diameter
- 8 Inner Tip Diameter 9 Tip Material (only for CuBe)

HOW TO ORDER • INNER CONDUCTOR

| | | | | | | | | | |
|------|---|---|---|-------|---|----|---|-----|---|
| 7860 | - | E | - | 1.3 N | - | Au | - | 0.8 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | | | | |

- 1 Series 2 Inner Conductor Tip 3 Spring Force 4 Tip Plating 5 Tip Diameter
- 6 Tip Material (only for CuBe)

HOW TO ORDER • INNER CONDUCTOR

| | | | | | | | | | |
|------|---|---|---|-------|---|----|---|-----|---|
| 7860 | - | A | - | 1.3 N | - | Au | - | 1.5 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | | | | |

- 1 Series 2 Inner Conductor Tip 3 Spring Force 4 Tip Plating 5 Tip Diameter
- 6 Tip Material (only for CuBe)

HOW TO ORDER • COMPLETE TEST PROBE

| | | | | | | | | | | | | |
|-------|---|---|----|---|---|-------|---|----|---|------|-----|---|
| 7860/ | G | - | Z9 | A | - | 5.3 N | - | Au | - | 5.0/ | 1.5 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | | | |

- 1 Series 2 Variant treaded Design 3 Outer Conductor Tip 4 Inner Conductor
- Tip 5 Total Spring Force 6 Tip Plating 7 Outer Tip Diameter
- 8 Inner Tip Diameter 9 Tip Material (only for CuBe)

Series 7860 • 7860/G

High Frequency Test Probe - Impedance 50 Ohm - up to 6 GHz

High Frequency Test Probe - Impedance 50 Ohm - up to 6 GHz

Series 7860 • 7860/G NEW

BENEFIT

- For high frequency measurements
- Compact design
- Also screwable type
- Inner conductor and outer tip are independently of each other and interchangeable

MECHANICAL DATA • INNER CONDUCTOR

| | |
|--------------------------------|--------------|
| Full Travel | 3.70 mm |
| Working Travel | 2.00 mm |
| Pre-Loaded Spring Force | 0.65/ 0.95 N |
| Spring Force at Working Travel | 1.30/ 2.00 N |

MECHANICAL DATA • OUTER CONDUCTOR

| | |
|--------------------------------|--------------------|
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 1.50/ 3.00/ 4.00 N |
| Spring Force at Working Travel | 4.00/ 6.00/ 8.00 N |

TOTAL SPRING FORCE

| | |
|-------------------------------------|---------------------------------------|
| Full Spring Force at Working Travel | 5.30/ 6.00/ 7.30/ 8.00/ 9.30/ 10.00 N |
|-------------------------------------|---------------------------------------|

ELECTRICAL DATA • INNER CONDUCTOR

| | |
|-----------------|-------------|
| Impedance | 50 Ohm |
| Frequency Range | up to 6 GHz |

MATERIALS

| | |
|---------|--------------------|
| Barrel | Brass, gold plated |
| Spring | Steel, gold plated |
| Plunger | CuBe, gold plated |


AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 7860/G-8.0 | 8.0 |



CABLE DATA

| | |
|------------------------------|--------------|
| Type | Multiflex 86 |
| Length | 750 mm |
| Connector Test Probe | MCX |
| Connector Testing Technology | SMA |

FAKRA PLUG

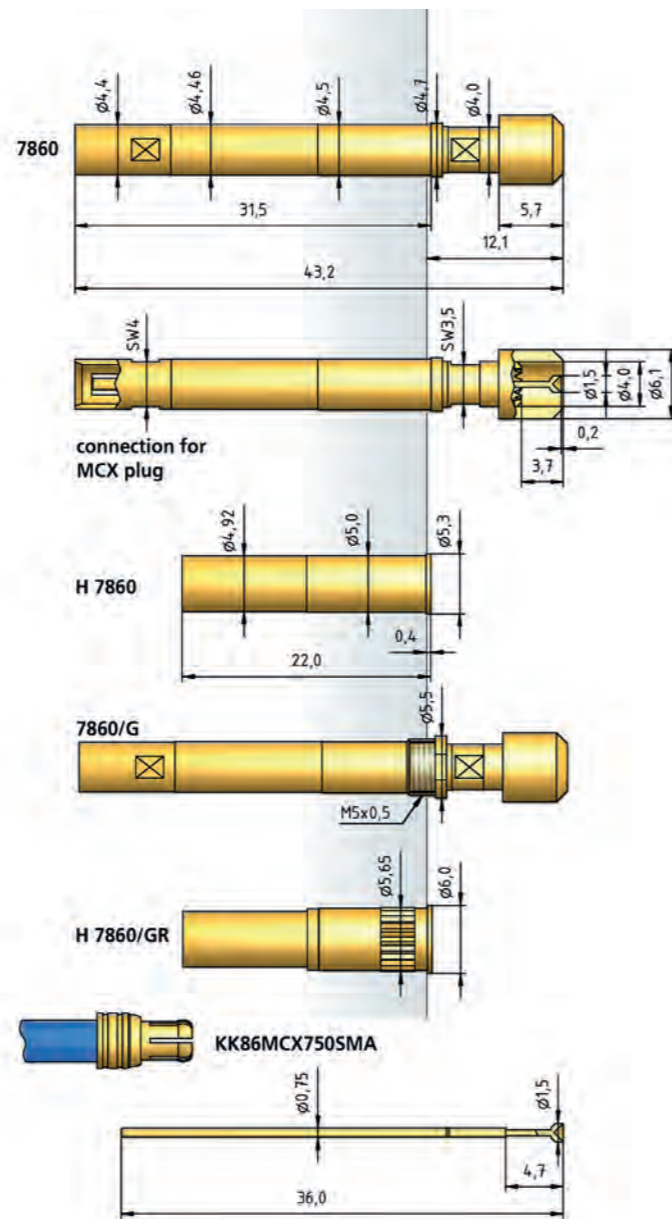

FAKRA SOCKET

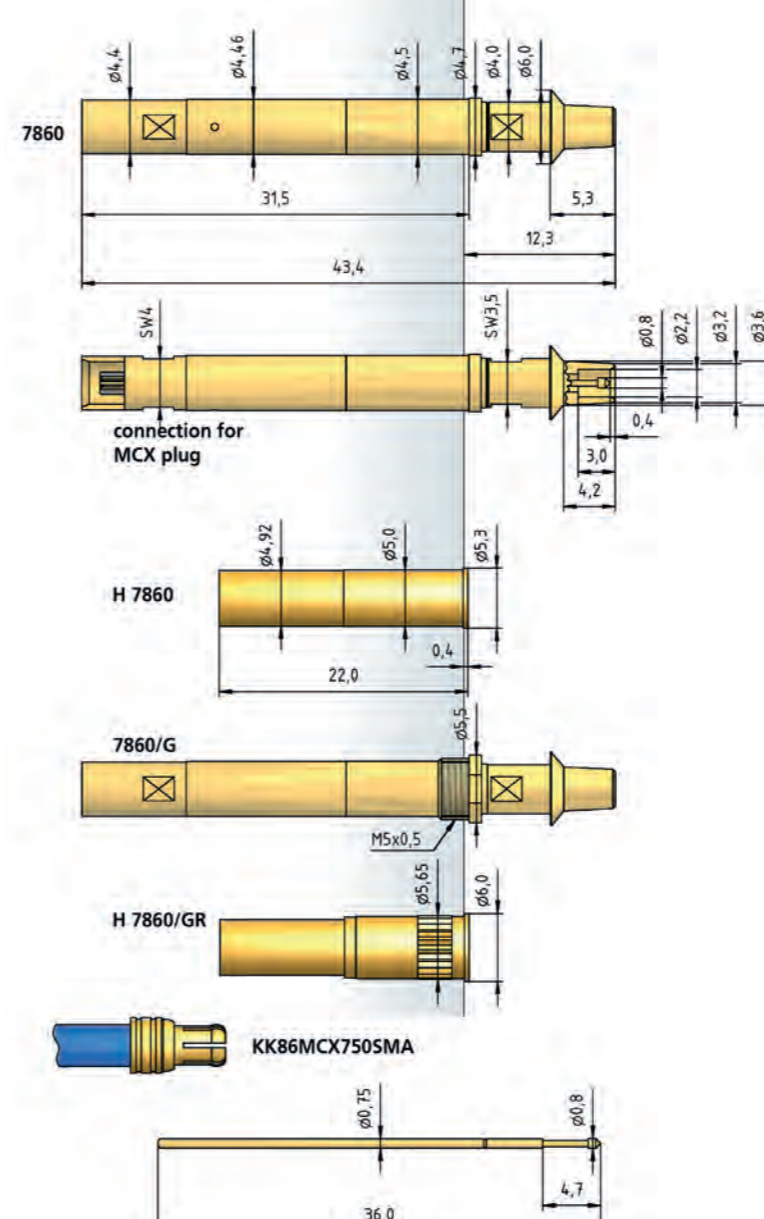

BENEFIT

- For high frequency measurements
- Compact design
- Also screwable type
- Inner conductor and outer tip are independently of each other and interchangeable

MECHANICAL DATA • INNER CONDUCTOR

| | |
|--------------------------------|--------------|
| Full Travel | 3.70 mm |
| Working Travel | 2.00 mm |
| Pre-Loaded Spring Force | 0.65/ 0.95 N |
| Spring Force at Working Travel | 1.30/ 2.00 N |

MECHANICAL DATA • OUTER CONDUCTOR

| | |
|--------------------------------|--------------------|
| Full Travel | 5.00 mm |
| Working Travel | 4.00 mm |
| Pre-Loaded Spring Force | 1.50/ 3.00/ 4.00 N |
| Spring Force at Working Travel | 4.00/ 6.00/ 8.00 N |

TOTAL SPRING FORCE

| | |
|-------------------------------------|---------------------------------------|
| Full Spring Force at Working Travel | 5.30/ 6.00/ 7.30/ 8.00/ 9.30/ 10.00 N |
|-------------------------------------|---------------------------------------|

ELECTRICAL DATA • INNER CONDUCTOR

| | |
|-----------------|-------------|
| Impedance | 50 Ohm |
| Frequency Range | up to 6 GHz |

MATERIALS

| | |
|---------|--------------------|
| Barrel | Brass, gold plated |
| Spring | Steel, gold plated |
| Plunger | CuBe, gold plated |

AVAILABLE SCREW TOOLS

| Article Designation | max. Tip-∅ |
|---------------------|------------|
| WFS 7860/G-8.0 | 8.0 |

CABLE DATA

| | |
|------------------------------|--------------|
| Type | Multiflex 86 |
| Length | 750 mm |
| Connector Test Probe | MCX |
| Connector Testing Technology | SMA |

HOW TO ORDER • COMPLETE TEST PROBE

| | | | | | | | | | | | | | |
|-------|---|---|-----|---|---|-----|---|---|----|---|------|-----|---|
| 7860/ | G | - | Z25 | A | - | 5.3 | N | - | Au | - | 6.1/ | 1.5 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | | | | |

- 1 Series 2 Variant treaded Design 3 Outer Conductor Tip 4 Inner Conductor
- Tip 5 Total Spring Force 6 Tip Plating 7 Outer Tip Diameter
- 8 Inner Tip Diameter 9 Tip Material (only for CuBe)

HOW TO ORDER • INNER CONDUCTOR

| | | | | | | | | | | |
|------|---|---|---|-----|---|---|----|---|-----|---|
| 7860 | - | A | - | 1.3 | N | - | Au | - | 1.5 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | | | | | |

- 1 Series 2 Inner Conductor Tip 3 Spring Force 4 Tip Plating 5 Tip Diameter
- 6 Tip Material (only for CuBe)

HOW TO ORDER • INNER CONDUCTOR

| | | | | | | | | | | |
|------|---|---|---|-----|---|---|----|---|-----|---|
| 7860 | - | E | - | 1.3 | N | - | Au | - | 0.8 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | | | | | |

- 1 Series 2 Inner Conductor Tip 3 Spring Force 4 Tip Plating 5 Tip Diameter
- 6 Tip Material (only for CuBe)

HOW TO ORDER • COMPLETE TEST PROBE

| | | | | | | | | | | | | | |
|-------|---|---|-----|---|---|-----|---|---|----|---|------|-----|---|
| 7860/ | G | - | Z20 | E | - | 5.3 | N | - | Au | - | 3.2/ | 0.8 | C |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | | | | |

- 1 Series 2 Variant treaded Design 3 Outer Conductor Tip 4 Inner Conductor
- Tip 5 Total Spring Force 6 Tip Plating 7 Outer Tip Diameter
- 8 Inner Tip Diameter 9 Tip Material (only for CuBe)

FIXTURE CUSTOMIZING

**Interface Pins and Interface Test Probes
for various adapter interfaces are available for
adapter development.**

As a specialist in turned parts, PTR also offers special types for the manufacture of individual interfaces or also counter-contacts for battery applications.

A Marker Probe is available for marking PCBs or similar as correct or defective. This Probe can automatically and extremely quickly mark the required PCBs with a small circle, which ensures that defective parts can be quickly recognized and sorted out.

The Testjet pin is a special pin which is used in adapter development specifically to test HP Testjets or Teradyne Frame Scan applications. The main function of this Test Probe is to keep the pressure on the Testjet sensor plates as low as possible. The springs of the pin adapt the position of the sensor plate to the test piece, which prevents any possible twisting of the plate.

| SERIES | CENTER | PAGE |
|-------------|-------------------|------|
| 1016 | 100 mil / 2.54 mm | 212 |
| 1025.21 | | 213 |
| SK 790 | | 214 |
| IF Contacts | | 215 |



Series 1016

Test Probe 100 mil / 2.54 mm

Testjet Test Probe

Series 1025.21

BENEFIT

- Universal field of application
- Contacting of assembled PCBs
- Interface pin

MECHANICAL DATA • 1016 B1

| | |
|--------------------------------|-------------------|
| Center | 2.54 mm / 100 mil |
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 3.10 mm |
| Pre-Loaded Spring Force | 0.55 N |
| Spring Force at Working Travel | 1.25 N |

ELECTRICAL DATA

| | |
|-------------------------------|-----------|
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |

MATERIALS

| | |
|---------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe, gold plated |


RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.67 mm |
| with pressed-in Ring | 1.75 mm |
| HGW 2372 (Glass filled material) | 1.69 mm |
| with pressed-in Ring | 1.76 mm |

TIP STYLE · DIAMETER · PLATING



| | |
|-----------|-----------|
| B1 | H2 |
| 1.00C Au | 1.00C Au |

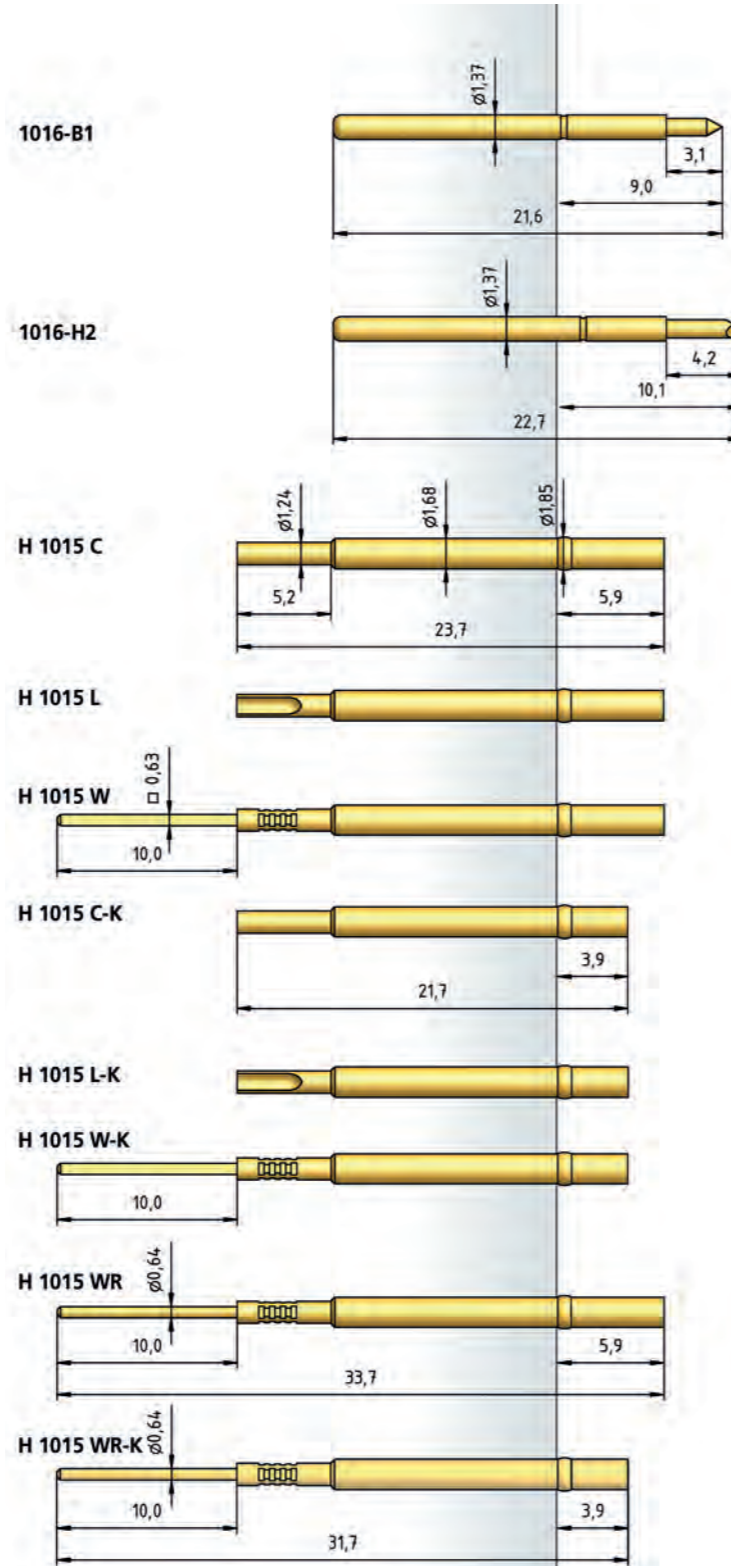

HOW TO ORDER


1016 - B1 - 1.25 N - Au - 1.0 C

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Tip Diameter 6 Tip Material (only for CuBe)

TIP STYLE · DIAMETER · PLATING



| |
|---------------|
| TJ |
| 1.35/2.65C Au |

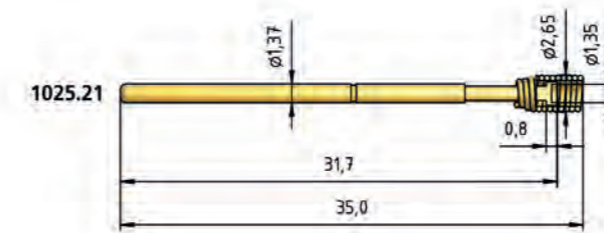

BENEFIT

- For testing HP Testjet or Teradyne Frame Scan Applications
- Tip with spring
- Compensation of possible tilt of the Sensor Plate on the device

MECHANICAL DATA

| | |
|--------------------------------|------------------|
| Temperature Range | -30 °C - +120 °C |
| Full Travel | 4.80 mm |
| Working Travel | 4.40 mm |
| Pre-Loaded Spring Force | 0.50 N |
| Spring Force at Working Travel | 1.40 N |

ELECTRICAL DATA

| | |
|-------------------------------|-------------|
| Max. Current Rating | 3.0...5.0 A |
| Typical Continuity Resistance | ≤ 20 mOhm |

MATERIALS

| | |
|---------|---------------------------|
| Barrel | Bronze, gold plated |
| Spring | Spring Steel, gold plated |
| Plunger | CuBe, gold plated |

RECOMMENDED DIAMETER OF DRILL

| | |
|----------------------------------|---------|
| HP 2361.1 (Trolitax) | 1.65 mm |
| with pressed-in Ring | 1.75 mm |
| HGW 2372 (Glass filled material) | 1.67 mm |
| with pressed-in Ring | 1.76 mm |

HOW TO ORDER

1025.21 - TJ - 1.40 N - Au - 1.35 /2.65 C

1 Series 2 Tip Style 3 Spring Force 4 Tip Plating 5 Inner Tip Diameter 6 Outer Tip Diameter 7 Tip Material (only for CuBe)


IF Contacts

Interface Contact

PCB Marker Probe




SK 790

| BENEFIT | |
|--------------------------------|--------------------|
| Universal field of application | |
| Contacting of assembled PCBs | |
| Interface pin | |
| MECHANICAL DATA | |
| Temperature Range | -30 °C - +120 °C |
| ELECTRICAL DATA | |
| Max. Current Rating | 3.0 A |
| Typical Continuity Resistance | ≤ 30 mOhm |
| MATERIALS | |
| IK / GK | Brass, gold plated |



Here you will find the product video of SK790, which visualize a safe and intended use of our test probe.

| BENEFIT | |
|--|-----------------------------|
| Compact design | |
| Height adjustable | |
| Marker unit changeable | |
| Easy integration into existing systems | |
| MECHANICAL DATA | |
| Full Travel | 2.00 mm |
| Working Travel | 1.50 mm |
| Pre-Loaded Spring Force | 0.55 N |
| Spring Force at Working Travel | 3.10 N |
| Marked Area | 2.0 bar |
| Recommended Marking Impulse | approximately 1 bar |
| ELECTRICAL DATA | |
| Rated Voltage | 12 V |
| Output | 0.75 W |
| No-Load Current | 3.7 mA |
| Starting Current | 106 mA |
| Max. Permanent Load Current | 81 mA |
| Terminal Resistance | 114 Ohm |
| Pin no-load Speed | 180 min -1 |
| Max. Pin Torque | 54 mNm |
| MATERIALS | |
| Needle Material | Solid carbide |
| External Thread | M12x1 with wrench size SW11 |
| Nuts | SW14 |
| AVAILABLE ACCESSORIES | |
| Article Designation | |
| SK 790-AWE | Replacement Unit |
| WHE 1200/790 | Insertion Tool |
| SK 790-VoWi24V | Series Resistor for 24V |

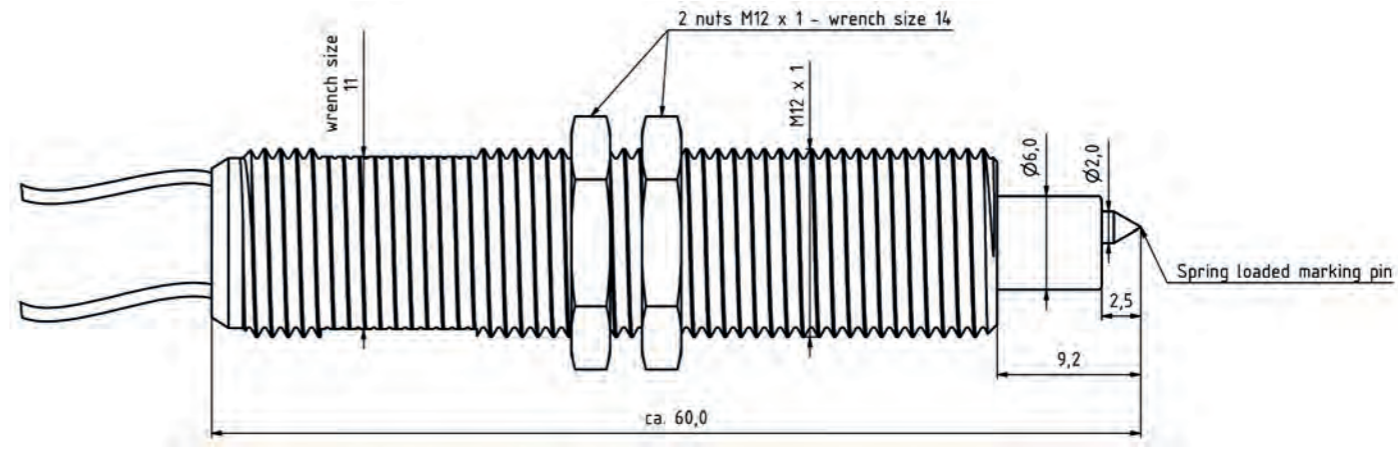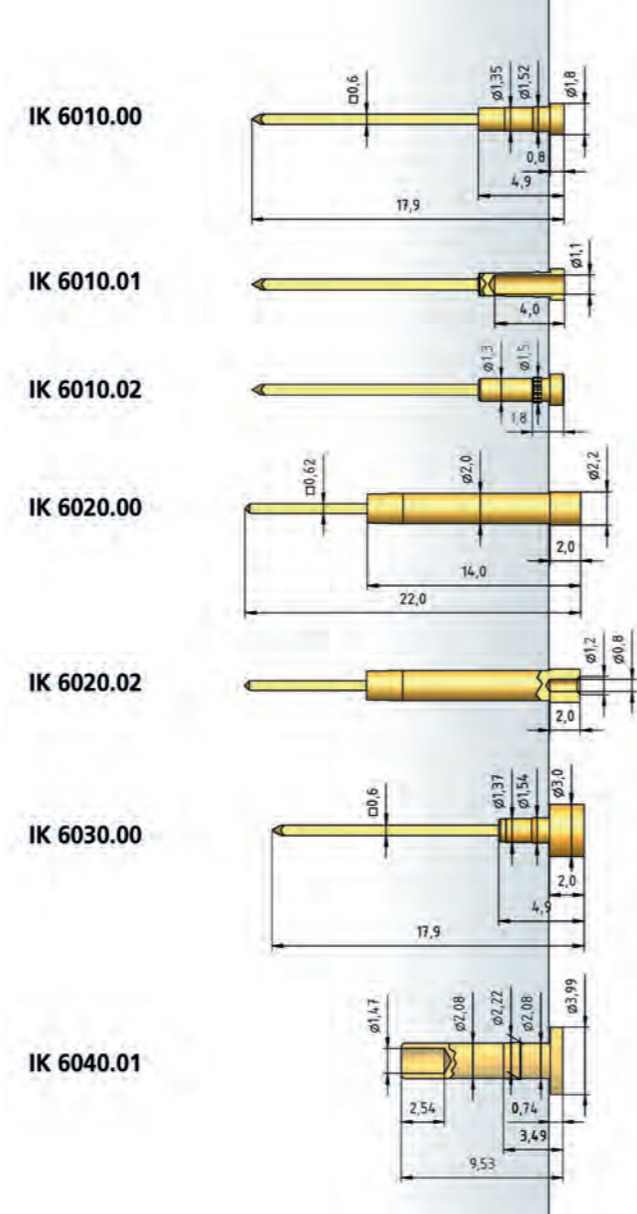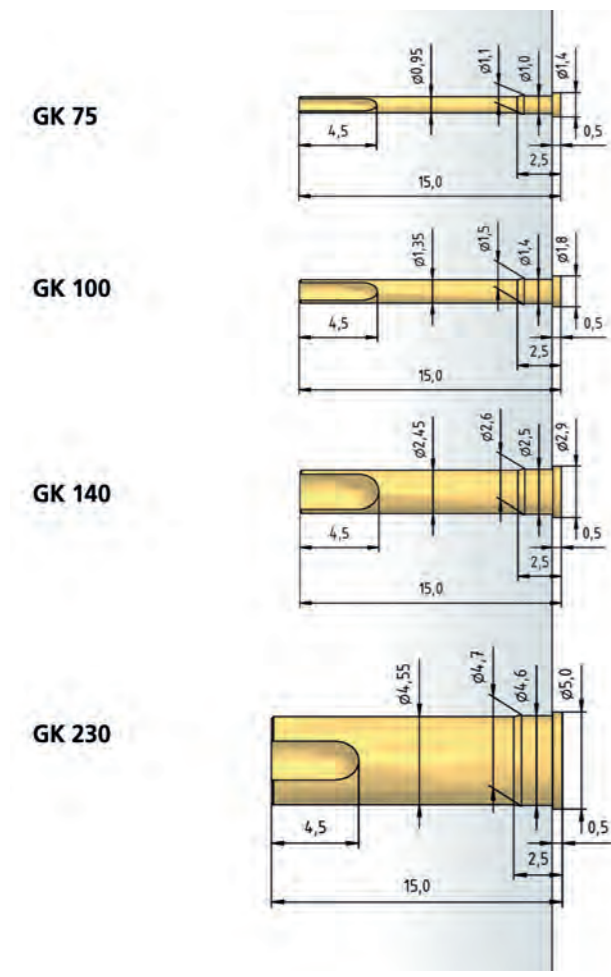

HOW TO ORDER

| | |
|----|---------|
| IK | 6010.01 |
| 1 | 2 |

1 Series 2 Variant

HOW TO ORDER

| |
|--------|
| SK 790 |
| 1 |

1 Series

TOOLS AND ACCESSORIES

A wide range of accessories is available for the professional use of PTR test probes.

These include receptacle insertion tools for the ICT test probe range and test probes for use in test modules for cable tests. In addition, we offer screwing tools for our series of test probes with thread, also available as torque screwdrivers. A spring force measuring device, especially suitable for use with the push-back probes needed for the cable test, completes this range. This device makes it possible to carry out the necessary monitoring of contact pressures and their constancy.



Insertion and Extraction Tools

for Test Probes



| TEST PROBE TYPE | SMALLEST SPACING mm / mil | TIP STYLE DIAMETER (mm) | INSERTION TOOL | EXTRACTION TOOL |
|-----------------|---------------------------|-------------------------|----------------|------------------|
| 1008/E | 1.27 / 50 | < 0.5 | WFE 1200/1008E | - |
| 1010 | 1.91 / 75 | 0.9 ... 1.5* | WFEA 1015 | WFEA 1015 |
| 1012/E | 1.91 / 75 | < 0.9 | WFEA 1015 | Flat-Nose-Pliers |
| 1012/E | 1.91 / 75 | 0.9 ... 2.0* | WFEA 1015 | WFEA 1015 |
| 1015 | 2.54 / 100 | < 0.9 | WFEA 1015 | Flat-Nose-Pliers |
| 1015 | 2.54 / 100 | 0.9 ... 2.0* | WFEA 1015 | WFEA 1015 |
| 1021, 2021 | 2.54 / 100 | < 1.2 | WFEA 1021 | Flat-Nose-Pliers |
| 1021, 2021 | 2.54 / 100 | 1.2 ... 2.0* | WFEA 1021 | WFEA 1021 |
| 1025/E | 2.54 / 100 | < 1.1 | WFEA 1025/E | Flat-Nose-Pliers |
| 1025/E | 2.54 / 100 | 1.1 ... 2.3* | WFEA 1025/E | WFEA 1025/E |
| 1028, 2028 | 2.54 / 100 | < 1.5 | WFEA 1028 | Flat-Nose-Pliers |
| 1028, 2028 | 2.54 / 100 | 1.5 ... 2.0* | WFEA 1028 | WFEA 1028 |
| 1029, 2029 | 2.54 / 100 | < 1.5 | WFEA 1028 | Flat-Nose-Pliers |
| 1029, 2029 | 2.54 / 100 | 1.5 ... 2.0* | WFEA 1028 | WFEA 1028 |
| 1030 | 2.54 / 100 | < 1.5 | WFEA 1028 | Flat-Nose-Pliers |
| 1030 | 2.54 / 100 | 1.5 ... 2.0* | WFEA 1028 | WFEA 1028 |
| 1041 | 4.00 / 160 | < 2.0 | WFEA 1050 | Flat-Nose-Pliers |
| 1041 | 4.00 / 160 | 2.0 ... 3.0* | WFEA 1050 | WFEA 1050 |
| 1042 | 4.00 / 160 | < 2.0 | WFEA 1050 | Flat-Nose-Pliers |
| 1042 | 4.00 / 160 | 2.0 ... 3.0* | WFEA 1050 | WFEA 1050 |
| 1050 | 4.00 / 160 | < 2.0 | WFEA 1050 | Flat-Nose-Pliers |
| 1050 | 4.00 / 160 | 2.0 ... 3.0* | WFEA 1050 | WFEA 1050 |
| 1060 | 4.00 / 160 | < 2.0 | WFEA 1050 | Flat-Nose-Pliers |
| 1060 | 4.00 / 160 | 2.0 ... 3.0* | WFEA 1050 | WFEA 1050 |
| 2053 | 2.54 / 100 | < 1.5 | WFEA 1028 | Flat-Nose-Pliers |
| 2053 | 2.54 / 100 | 1.5 ... 2.0* | WFEA 1028 | WFEA 1028 |
| 3010/.. | 4.00 / 160 | < 2.0 | WFEA 1050 | Flat-Nose-Pliers |
| 3010/.. | 4.00 / 160 | 2.0 ... 3.0* | WFEA 1050 | WFEA 1050 |
| 3020/2 | 2.54 / 100 | < 1.2 | WFEA 1021 | Flat-Nose-Pliers |
| 3020/2 | 2.54 / 100 | 1.2 ... 2.0* | WFEA 1021 | WFEA 1021 |
| 3026/2W | 2.54 / 100 | < 1.2 | WFEA 1021 | Flat-Nose-Pliers |
| 3026/2W | 2.54 / 100 | 1.2 ... 2.0* | WFEA 1021 | WFEA 1021 |
| 3030 | 2.54 / 100 | < 1.0 | WFEA 3030 | Flat-Nose-Pliers |
| 3030 | 2.54 / 100 | 1.0 ... 2.3* | WFEA 3030 | WFEA 3030 |

* When to use bigger headdiameters please order for special tools!
When ordering please mention the test probe type!

| RECEPTACLE | SLEEVE INSERTION TOOL | |
|---------------------------|-----------------------|------------------|
| | COMPLETE | INSERTION |
| H 1007 | WHE 1200/07 | WHE 1200/007 |
| H 1008, H1008/E | WHE 1200/08 | WHE 1200/008 |
| H 1010 | WHE 1200/12 | WHE 1200/012 |
| H 1012 | WHE 1200/12 | WHE 1200/012 |
| H 1015, H 1015/G.. | WHE 1200/15 | WHE 1200/015 |
| H 1021 | WHE 1200/21 | WHE 1200/021 |
| H 1021/GV.. | WHE 1200/21-V | WHE 1200/021-V |
| H 1025 | WHE 1200/15 | WHE 1200/015 |
| H 1030 | WHE 1200/30 | WHE 1200/030 |
| H 1050 | WHE 1200/50 | WHE 1200/050 |
| H 1053/GRV, H1053/GVRV | WHE 1200/53-V | WHE 1200/053-V |
| H 1070 | WHE 1200/75 | WHE 1200/075 |
| H 1075, H 1075/G-L | WHE 1200/75 | WHE 1200/075 |
| H 1080/GR-L, H 1080/GR-M5 | WHE 1200/80 | WHE 1200/80 |
| H 2021 | WHE 1200/21 | WHE 1200/021 |
| H 2050 | WHE 1200/50 | WHE 1200/050 |
| H 3014 | WHE 1200/3014 | WHE 1200/03014 |
| H 3023 | WHE 1200/3023 | WHE 1200/03023 |
| H 3024 | WHE 1200/3024 | WHE 1200/03024 |
| H 3026/W | WHE 1200/21 | WHE 1200/21 |
| H 3028/VR.01 | WHE 1200/3028-1 | WHE 1200/03028-1 |
| H 5104.. | WHE 1200/5104 | WHE 1200/05104 |
| SK790 | WHE 1200/790 | WHE 1200/790 |

| RECEPTACLE | SLEEVE EXTRACTION TOOL | |
|------------|------------------------|--------------|
| | COMPLETE | INSERTION |
| H 1008 | WHA 1200/08 | WHA 1200/008 |
| H 1012 | WHA 1200/12 | WHA 1200/012 |
| H 1025 | WHA 1200/25 | WHA 1200/025 |

| RECEPTACLE | SLEEVE INSERTION TOOL | | MARKING ON TOOL SHANK |
|--|-----------------------|----------|-----------------------|
| | COMPLETE | COMPLETE | |
| H 1015 | WHE 137 | | 1 Ring |
| H 1015/G | WHE 137 | | 1 Ring |
| H 1021 | WHE 165 | | 2 Rings |
| H 1021/G | WHE 165 | | 2 Rings |
| H 1042 | WHE 300 | | 4 Rings |
| H 1050 | WHE 265 | | 3 Rings |
| H 1060/G | WHE 265 | | 3 Rings |
| H 2021 | WHE 165 | | 2 Rings |
| H 2050 | WHE 265 | | 3 Rings |
| H 3010, H 3010-22, H 3010/S-23, H 3010/S-28 | WHE 265 | | 3 Rings |
| H 3010/GS, H 3010/GW, H 3010/GW5, H 3010/GWR5 | WHE 265 | | 3 Rings |
| H 3011 | WHE 265 | | 3 Rings |
| H 3020, H 3020/S-26 | WHE 165 | | 2 Rings |
| H 3020/GS-26, H 3020/GRS-26, H 3020/GW5, H 3020/GWR5 | WHE 165 | | 2 Rings |
| H 3023/G, H 3023/5G, H 3023/GWR5 | WHE 165 | | 2 Rings |

Receptacle Insertion Tools

Metal Handle Design



Receptacle Extraction Tools

Metal Handle Design

Receptacle Insertion Tools

Plastic Handle Design



Screwing Tools / Screw-In Torques Test Probes with Thread

Screwing Tools / Screw-In Torques Test Probes with Thread

IMPORTANT: If excessive torque is applied, this may destroy the threaded test probe (broken thread, buckling of barrel and/or receptacle, damage to the barrel square-end or screw slot), or it may destroy the screwing tool (cracking/splitting of the square end, damage to the square-end surfaces etc. → loss of grip)




| SERIES | SMALLEST CENTER | GREATEST HEAD DIAMETER | TOOL TYPE | SCREWING TOOLS | RECOMMENDED SCREWING-IN TORQUE | MAXIMUM SCREWING-IN TORQUE |
|-------------------------------|-----------------|------------------------|-----------|--|--------------------------------|----------------------------|
| 1007/G | 1.27 | 1.0 | A | WFS 1007/G-1.27-1.0 | 0.5 ... 1.0 Ncm | max. 1.0 Ncm |
| 1010/G | 1.50 | 1.0 | A | WFS 1010/G-1.5-1.0 | 1.0 Ncm | max. 1.5 Ncm |
| | 2.30 | 1.5 | B | WFS 1010/G-2.3-1.5-Z | 1.0 Ncm | max. 1.5 Ncm |
| 1012/G | 1.50 | 1.0 | A | WFS 1012/G-1.5-1.0 | 0.5 ... 1.0 Ncm | max. 1.0 Ncm |
| | 1.90 | 1.5 | B | WFS 1012/G-1.9-1.5-Z | 0.5 ... 1.0 Ncm | max. 1.0 Ncm |
| 1015/G | 2.54 | 1.5 | A | WFS 1015/G-2.54-1.5 | 2.0 Ncm | max. 3.0 Ncm |
| | 2.54 | 1.8 | A | WFS 1015/G-2.54-1.8 | 2.0 Ncm | max. 3.0 Ncm |
| 1021/G, 1021/GV | 2.54 | 1.8 | A | WFS 1021/G-2.54-1.8 | 3.0 Ncm | max. 5.0 Ncm |
| | 2.54 | 2.0 | A | WFS 1021/G-2.54-2.0 | 3.0 Ncm | max. 5.0 Ncm |
| | 3.00 | 2.5 | B | WFS 1021/G-C2S-3.0-2.5-Z | 3.0 Ncm | max. 5.0 Ncm |
| | 3.50 | 3.0 | B | WFS 1021/G-3.5-3.0-Z | 2.0 Ncm | max. 3.0 Ncm |
| 1021/G-D19xx, F19xx | 2.54 | 1.5 | C | WFS 1021/G-2.54-1.5-SW | 2.0 Ncm | max. 3.0 Ncm |
| | 3.00 | 1.5 | C | WFS 1021/G-3.0-1.5-SW | 3.0 Ncm | max. 5.0 Ncm |
| 1021/GT-D17xx, F17xx | Plate-Ø ≥ 2.1 | 1.5 | F | WFS 1021/GT-1 | 3.0 Ncm | max. 5.0 Ncm |
| | Plate-Ø ≥ 2.8 | 1.6 - 2.2 | F | WFS 1021/GT-2 | 3.0 Ncm | max. 5.0 Ncm |
| 1024/G, 1028/G | see 1021/G | | | | | |
| 1042/G | all | all | D | Screwdriver for Slotted Screws 1.8 x 0.5 | 4.0 Ncm | max. 15.0 Ncm |
| 1053/G | 5.00 | 4.0 | B | WFS 1053/G-5.0-4.0-Z | 4.0 Ncm | max. 7.0 Ncm |
| | 6.00 | 5.0 | B | WFS 1053/G-6.0-5.0-Z | 4.0 Ncm | max. 7.0 Ncm |
| 1060/G | 4.00 | 3.0 | A | WFS 1060/G-4.0-3.0 | 4.0 Ncm | max. 15.0 Ncm |
| | 5.00 | 4.0 | B | WFS 1060/G-5.0-4.0-Z | 4.0 Ncm | max. 15.0 Ncm |
| 1060/G-D19xx, F19xx | 4.00 | 2.3 | C | WFS 1060/G-4.0-2.3-SW | 3.0 Ncm | max. 5.0 Ncm |
| | 5.00 | 3.0 | C | WFS 1060/G-5.0-3.0-SW | 4.0 Ncm | max. 10.0 Ncm |
| 1060/GT-F16xx | Plate-Ø ≥ 3.5 | from 3.3 | F | WFS 1021/GT-1 | 3.0 Ncm | max. 5.0 Ncm |
| | Plate-Ø ≥ 2.1 | 1.5 | F | WFS 1021/GT-1 | 3.0 Ncm | max. 5.0 Ncm |
| 1060/GT-D17xx, F17xx | Plate-Ø ≥ 2.8 | 2.2 | F | WFS 1021/GT-1 | 3.0 Ncm | max. 5.0 Ncm |
| | Plate-Ø ≥ 4.0 | 3.3 | F | WFS 1060/GT | 3.0 Ncm | max. 5.0 Ncm |
| 1061/G | 4.00 | 3.0 | A | WFS 1060/G-4.0-3.0 | 4.0 Ncm | max. 15.0 Ncm |
| 1075/G | 5.00 | 4.0 | A | WFS 1070/G-5.0-4.0 | 5.0 Ncm | max. 15.0 Ncm |
| 3010/2G | 4.00 | 3.0 | A | WFS 1060/G-4.0-3.0 | 4.0 Ncm | max. 15.0 Ncm |
| | 5.00 | 4.0 | B | WFS 1060/G-5.0-4.0-Z | 4.0 Ncm | max. 15.0 Ncm |
| 3010/2G5 | 4.00 | 3.0 | A | WFS 1060/G-4.0-3.0 | 4.0 Ncm | max. 15.0 Ncm |
| | 5.00 | 4.0 | B | WFS 1060/G-5.0-4.0-Z | 4.0 Ncm | max. 15.0 Ncm |
| 3010/2GW | 4.00 | 3.0 | A | WFS 1060/G-4.0-3.0 | 4.0 Ncm | max. 15.0 Ncm |
| | 5.00 | 4.0 | B | WFS 1060/G-5.0-4.0-Z | 4.0 Ncm | max. 15.0 Ncm |
| 3010/2GW5 | 4.00 | 3.0 | A | WFS 1060/G-4.0-3.0 | 4.0 Ncm | max. 15.0 Ncm |
| | 5.00 | 4.0 | B | WFS 1060/G-5.0-4.0-Z | 4.0 Ncm | max. 15.0 Ncm |
| 3010/10G | 4.00 | 3.0 | A | WFS 1060/G-4.0-3.0 | 4.0 Ncm | max. 15.0 Ncm |
| | 5.00 | 4.0 | B | WFS 1060/G-5.0-4.0-Z | 4.0 Ncm | max. 15.0 Ncm |
| 3011/2GS, 3011/2FGS | 4.00 | 3.0 | A | WFS 1060/G-4.0-3.0 | 4.0 Ncm | max. 15.0 Ncm |
| | 5.00 | 4.0 | B | WFS 1060/G-5.0-4.0-Z | 4.0 Ncm | max. 15.0 Ncm |
| 3012/2GS (Plungers with Pins) | all | all | D | Screwdriver for Slotted Screws 1.8 x 0.5 | 4.0 Ncm | max. 7.0 Ncm |

| SERIES | SMALLEST CENTER | GREATEST HEAD DIAMETER | TOOL TYPE | SCREWING TOOLS | RECOMMENDED SCREWING-IN TORQUE | MAXIMUM SCREWING-IN TORQUE |
|----------------------------------|-----------------|------------------------|-----------|--------------------------|--------------------------------|----------------------------|
| 3012/2GS (Plungers without Pins) | 4.00 | 2.6 | A | WFS 3012-4.0-2.6 | 4.0 Ncm | max. 7.0 Ncm |
| | 4.00 | 3.0 | A | WFS 1060/G-4.0-3.0 | 4.0 Ncm | max. 15.0 Ncm |
| 3014/2G | 5.00 | 4.0 | B | WFS 1060/G-5.0-4.0-Z | 4.0 Ncm | max. 15.0 Ncm |
| | 6.00 | 5.0 | B | WFS 1060/G-6.0-5.0-Z | 4.0 Ncm | max. 15.0 Ncm |
| 3015/G | 7.00 | 5.0 | A | WFS 3015/G-7.0 | 5.0 Ncm | max. 15.0 Ncm |
| | 2.54 | 1.8 | A | WFS 1021/G-2.54-1.8 | 3.0 Ncm | max. 5.0 Ncm |
| 3020/2G, 3020/2GW5 | 2.54 | 2.0 | A | WFS 1021/G-2.54-2.0 | 3.0 Ncm | max. 5.0 Ncm |
| | 3.00 | 2.5 | B | WFS 1021/G-C2S-3.0-2.5-Z | 3.0 Ncm | max. 5.0 Ncm |
| | 3.50 | 3.0 | B | WFS 1021/G-3.5-3.0-Z | 2.0 Ncm | max. 3.0 Ncm |
| | 2.54 | 1.8 | A | WFS 1021/G-2.54-1.8 | 3.0 Ncm | max. 5.0 Ncm |
| 3023/2GS | 2.54 | 2.0 | A | WFS 1021/G-2.54-2.0 | 3.0 Ncm | max. 5.0 Ncm |
| | 3.00 | 2.5 | B | WFS 1021/G-C2S-3.0-2.5-Z | 3.0 Ncm | max. 5.0 Ncm |
| | 3.50 | 3.0 | B | WFS 1021/G-3.5-3.0-Z | 2.0 Ncm | max. 3.0 Ncm |
| 3024/2G | 2.54 | 1.8 | A | WFS 1021/G-2.54-1.8 | 3.0 Ncm | max. 5.0 Ncm |
| | 2.54 | 2.0 | A | WFS 1021/G-2.54-2.0 | 3.0 Ncm | max. 5.0 Ncm |
| | 3.00 | 2.5 | B | WFS 1021/G-C2S-3.0-2.5-Z | 3.0 Ncm | max. 5.0 Ncm |
| 3028.01 | 3.50 | 3.0 | B | WFS 1021/G-3.5-3.0-Z | 2.0 Ncm | max. 3.0 Ncm |
| | 2.54 | 1.8 | A | WFS 1021/G-2.54-1.8 | 3.0 Ncm | max. 5.0 Ncm |
| | 2.54 | 2.0 | A | WFS 1021/G-2.54-2.0 | 3.0 Ncm | max. 5.0 Ncm |
| 3030/GW3 | 3.00 | 2.5 | B | WFS 1021/G-C2S-3.0-2.5-Z | 3.0 Ncm | max. 5.0 Ncm |
| | 3.50 | 3.0 | B | WFS 1021/G-3.5-3.0-Z | 2.0 Ncm | max. 3.0 Ncm |
| 4004/G | 2.54 | 1.5 | A | WFS 1015/G-2.54-1.5 | 2.0 Ncm | max. 3.0 Ncm |
| | 2.54 | 1.8 | A | WFS 1015/G-2.54-1.8 | 2.0 Ncm | max. 3.0 Ncm |
| 5104 | 4.00 | 3.0 | A | WFS 1060/G-4.0-3.0 | 4.0 Ncm | max. 15.0 Ncm |
| | 5.00 | 4.0 | B | WFS 1060/G-5.0-4.0-Z | 4.0 Ncm | max. 15.0 Ncm |
| 5110/G | 6.00 | 5.0 | B | WFS 1060/G-6.0-5.0-Z | 4.0 Ncm | max. 15.0 Ncm |
| | 4.00 | 3.0 | A | WFS 1060/G-4.0-3.0 | 4.0 Ncm | max. 15.0 Ncm |
| 5203 | 5.00 | 4.0 | B | WFS 1060/G-5.0-4.0-Z | 4.0 Ncm | max. 15.0 Ncm |
| | 6.00 | 5.0 | B | WFS 1060/G-6.0-5.0-Z | 4.0 Ncm | max. 15.0 Ncm |
| 5207/G | all | all | E | Hexagon Socket Key 2 mm | 4.0 Ncm | max. 15.0 Ncm |
| 5248/G | 2.5 | 2.0 | A | WFS 5248/G-2.54-2.0 | 3.0 Ncm | max. 5.0 Ncm |
| | 2.54 | 1.8 | A | WFS 1021/G-2.54-1.8 | 3.0 Ncm | max. 5.0 Ncm |
| 5257/G | 2.54 | 2.0 | A | WFS 1021/G-2.54-2.0 | 3.0 Ncm | max. 5.0 Ncm |
| | 3.00 | 2.5 | B | WFS 1021/G-C2S-3.0-2.5-Z | 3.0 Ncm | max. 5.0 Ncm |
| | 3.50 | 3.0 | B | WFS 1021/G-3.5-3.0-Z | 2.0 Ncm | max. 3.0 Ncm |
| 5265 | 3.00 | 2.3 | A | WFS 5265-3.0-2.3 | 3.0 Ncm | max. 5.0 Ncm |
| | 3.00 | 2.5 | B | WFS 5265-3.0-2.5-Z | 3.0 Ncm | max. 5.0 Ncm |
| | 3.50 | 3.0 | B | WFS 5265-3.5-3.0-Z | 3.0 Ncm | max. 5.0 Ncm |
| | 4.50 | 4.0 | B | WFS 5265-4.5-4.0-Z | 3.0 Ncm | max. 5.0 Ncm |
| 5310/G | 2.54 | 1.8 | A | WFS 1021/G-2.54-1.8 | 3.0 Ncm | max. 5.0 Ncm |
| | 2.54 | 2.0 | A | WFS 1021/G-2.54-2.0 | 3.0 Ncm | max. 5.0 Ncm |
| 7840/G | / | 8.0 | B | WFS 7840/G-8.0 | 5.0 Ncm | max. 8.0 Ncm |
| 7860/G | / | 8.0 | B | WFS 7860/G-8.0 | 5.0 Ncm | max. 8.0 Ncm |


A – closed square-head | B – claw (only for two-line assembly) | D – screwdriver for slotted screws | E – hexagon socket key | F – three point wrench
Other tools on request! When ordering tools, please specify the test probe to be assembled!

Screwing Tools for Test Probes with Thread


Tool Type

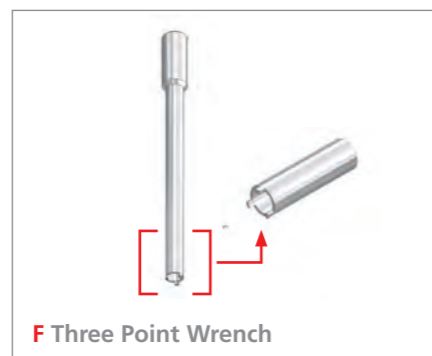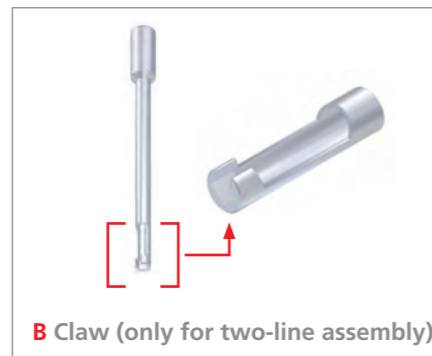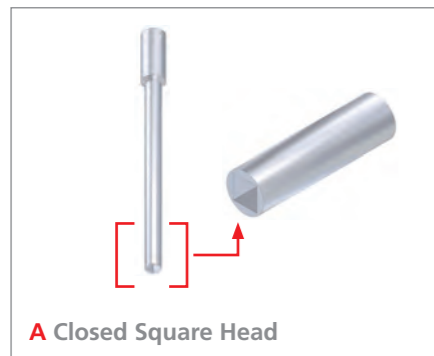

Assembly Tools for High Frequency Test Probe

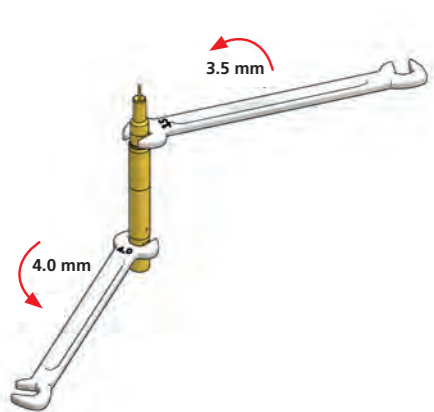

Spanners



Assembly / Dismantling of the Inner Conductor using the Special Tool


| SERIES | GREATEST HEAD DIAMETER | TOOL TYPE |
|-------------------|------------------------|---------------|
| 7840(G) / 7860(G) | 0,5 | WFK 7860-i-05 |
| 7840(G) / 7860(G) | 1.8 | WFK 7860-i-18 |
| 7840(G) / 7860(G) | | SW 3.5 |
| 7840(G) / 7860(G) | | SW 4.0 |

| TYPE | COLOUR CODE | SECTOR |
|-------|-------------|--------|
| DMS 2 | grün | 2 Ncm |
| DMS 3 | blau | 3 Ncm |
| DMS 4 | rot | 4 Ncm |


4 point crimping
For receptacles
Crimping capacities adjustable

| TECHNICAL DATA | |
|----------------|-----------------------------|
| Wire Size | 0.09 - 0.82 mm ² |
| AWG | 32 - 20 |
| Weight | 332,75 g |

Torque Screwdrivers

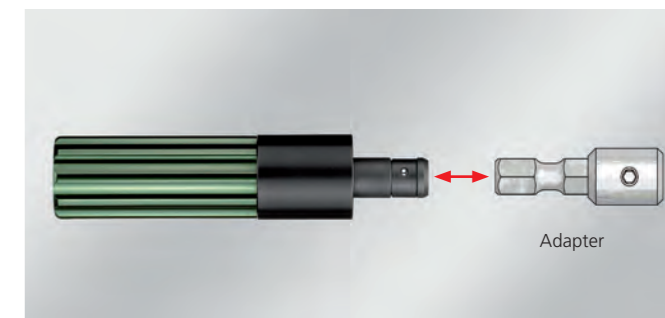

Crimp Tool AFM8

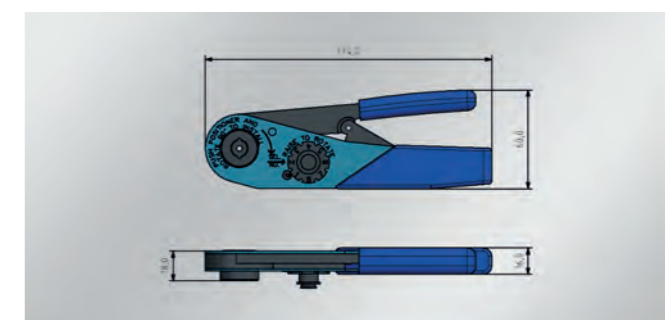


Digital Force Gauge FKT 50



| SPECIFICATIONS | |
|-------------------|---|
| Display | 5-digits LCD display with light |
| Display direction | Positive or Reserve direction, select by the push button on the front panel |
| Function | Tension & Compression (Push & Pull) |
| Peak | Will freeze the display value of the peak load (Max. load) |
| Zero | Zero button can be operated both for "normal force" or Peak hold" operation |
| Unit select | g / N / oz |
| Measure Capacity | 5 kg / 49.3 N / 176.40 oz |
| min. Display | 3 g / 0.03 N / 0.10 oz |
| Accuracy | +/- 0.4 % at 25 °C |
| Overload Capacity | 7.5 kg |
| Power Consumption | approx. 28 mA |
| Power Supply | 6 x 1.5 V AA (not included) |
| Dimension | 215 x 90 x 45 mm |
| Weight | 650 g with batteries |

| DIMENSION | | |
|-----------|----------|-------------|
| Ø A (mm) | Ø B (mm) | CENTER (mm) |
| 2,1 | 1,6 | 2,54 |
| 2,6 | 2,1 | 2,54 |
| 3,6 | 3,1 | 4 |
| 4,6 | 4,1 | 5 |
| 5,6 | 5,1 | 6 |

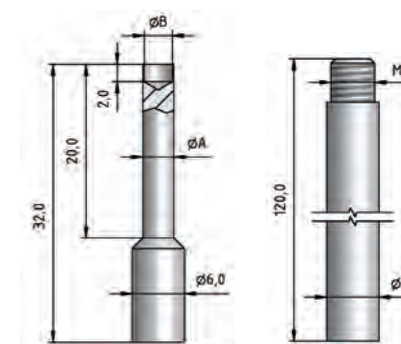

Test Point

Connecting Bar

Representations | PTR Worldwide

Overseas Representations Test Probes

Austria

Wöhrlleitner & Wöhrlleitner GmbH
Eumigweg 7
A – 2351 Wiener Neudorf
Phone 0043 2236-62818 DW 1
Fax 0043 2236-320081 111
roland@woehrleitner.at
www.woehrleitner.at

Belgium

PM Komponenten NV
Karrewegstraat 124
B – 9800 DEINZE
Phone 0032 9220-7050
Fax 0032 9220-7250
info.pmb@pmk.be
www.pmk.be

China

Shenzhen Elcom Co., Ltd.
8/F, Guancheng Industry Building,
Gongming Town
CN – Guangming District, Shenzhen
Phone 0086 755 2768-5838
Fax 0086 755 2768-2188
eddy@elcom-shenzhen.com
www.elcom-shenzhen.com

Czech Republic, Slovakia

Technik Partner s.r.o.
U Rybníka 149
CZ – 250 65 Boranovice
Phone 00420 28385-1781
Fax 00420 28385-2775
info@technikpartner.cz
www.technikpartner.cz

Denmark

Chemo Electric A/S
Hasselunden 14 - 16
DK – 2765 Smorum
Phone 0045 3677-3044
Fax 0045 3677-3088
info@chemolec.dk
www.chemolec.dk

France

Phoenix Mecano S.A.R.L.
76, rue du Bois-Galon
F – 94121 Fontenay sur Bois, Cedex
Phone 0033 15399-5059
Fax 0033 15399-5079
info.ptr@phoenix-mecano.com
www.phoenixmecano.fr

Finland

Tampereen Sähköpalvelu Oy
Lentokentäkatu 9 b
FIN – 33900 TAMPERE
Phone 0035 832515-111
Fax 0035 832515-211
tsp@tsp.fi
www.tsp.fi

Great Britain

Peak Test Services Ltd.
152 Front Street, Chester-le-Street
GB – Co. Durham DH3 3AY
Phone 0044 191 387-1923
Fax 0044 191 387-1994
peak.test@thepeakgroup.com
www.thepeakgroup.com

Hungary

Phoenix Mecano Kecskemét Kft
Szent István krt. 24
H – 6000 Kecskemét
Phone 0036 1 26-07730
Fax 0036 1 26-13464
info@phoenix-mecano.hu
www.phoenix-mecano.hu

Italy

Fast Elettronica Italiana S.p.A.
Via Rovetta, 35
IT – 20127 Milano
Phone 0039 022-610141
Fax 0039 022-822287
sales@fastelettronica.com
www.fastelettronica.com

Korea

Test Meca Co., Ltd.
#535, Shinanmetrokan,
1115 Bisan-Dong, Donan-Gu,
Anyang-Si, Gyeonggi-Do
KOREA (431-050)
Phone 0082 31388-2211
Fax 0082 31388-2212
pnb@testmeca.co.kr
www.testmeca.co.kr

Mexico

Target Technology Inc.
Pensylvania 30,
Col. Nápoles C.P. 03810,
México D.F.
Phone 0052 55-55235654
Fax 0052 55-11078875
electronic@targettech.com.mx

Netherlands

Elincom electronics BV
Klaverbaan 101
NL – 2908 KD Capelle aan den IJssel
Phone 0031 102640-270
Fax 0031 102640-275
info@elincom.nl
www.elincom.nl

Poland

Semicon Sp. z o.o.
ul. Zwolenska 43/43A
PL – 04- 761 Warszawa
Phone 0022 61573-71
Fax 0022 61573-75
info@semicon.com.pl
www.semicon.com.pl

Russia

Russian Representation
Moscow
Phone 007 9663177733
Mobil: 007 9067960606
Alexey.Burkhanov@ptr-hartmann.com

Singapore

Phoenix Mecano S.E. Asia
Pte. Ltd.
53 Ubi Ave 3
04-01, Colourscan Building
SG – 408863
Phone 0065 67491611
Fax 0065 67496766 / -49
pmsea@pmecano.com.sg
www.phoenixmecano.com.sg

Spain

Dotest S.L.
Gran Via de Carles III, 33-35
Baixos
E – 08028 Barcelona
Phone 0034 934-905560
Fax 0034 934-118244
dotest@dotestsl.com
www.dotestsl.com

South Africa

WILTRON Agencies CC
Stand 3622/66 9 MT Noonmark
Crescent Retire@Midstream
ZA – 1692 Midrand Estate
Phone 0027 129409475
Fax 0027 866847506
wiltron@global.co.za
www.wiltron-agencies.co.za

Switzerland

Phoenix Mecano Komponenten AG
Hofwisenstr. 6,
CH – 8260 Stein am Rhein
Phone 0041 52742-7500
Fax 0041 52742-7590
info@phoenix-mecano.ch
www.phoenix-mecano.ch

Tunisia

EP-Technologie
Head quarter
29 Av. Ahmed Tlili
Industrial Zone Borj Cedria
TN – 2055 Ben Arous
Phone 00216 79412-889
Fax 00216 79412-966
sales@ep-technologie.com
www.ep-technologie.com

Turkey

ELOPAR A.S.
Istanbul caddesi,
Kavakli koy yolu uzeri . No : 13
TR – Istanbul – Beylikduzu
Phone 0090 212 8751940
Fax 0090 212 8750473
elopar@elopar.com.tr
www.elopar.com.tr

USA

RNS International, Inc.
5001 Sirius Lane
US – Charlotte, NC 28208
Phone 001 704329-0444 Ext. 23
Fax 001 704329-0404
probes@rns-usa.com
www.rns-usa.com



PTR HARTMANN GmbH
Peter Heeren
Phone 0172 8139721
peter.heeren@ptr-hartmann.com



PTR HARTMANN GmbH
Lars Schlücker
Phone 0151 46190518
lars.schluecker@ptr-hartmann.com



PTR HARTMANN GmbH
Reinhold Krebs
Phone 0151 15039955
reinhold.krebs@ptr-hartmann.com



**Thomas Lüllau
Engineering Office**
Am Fischteich 7B
21423 Winsen (Luhe)
Phone 04171 7884-40
Fax 04171 7884-41
tl@t-luellau.de
www.t-luellau.de



PTR HARTMANN GmbH
Jürgen Bierent
Phone 0171 4161469
juergen.bierent@ptr-hartmann.com



CS CONNECTORS GmbH
Hindenburgring 82
86899 Landsberg am Lech
Phone 08191 98595-50
Fax 08191 98595-55
ptr@cs-connectors.de
www.cs-connectors.de




Series Index

| SERIES DESIGNATION | PAGE | SERIES DESIGNATION | PAGE |
|------------------------------|------|------------------------------|------|
| 1001 | 30 | 1025/E | 69 |
| 1002 | 31 | 1025/E – HPL | 84 |
| 1003 | 32 | 1028/G | 106 |
| 1004/E | 64 | 1030 | 52 |
| 1005 | 33 | 1034 | 70 |
| 1006 | 34 | 1034/E | 71 |
| 1007 | 38 | 1036 | 72 |
| 1007.50 | 39 | 1036/E | 73 |
| 1007.60 | 40 | 1040 | 54 |
| 1007.70 | 41 | 1041 • 1041W | 58 |
| 1007/G | 98 | 1042 | 59 |
| 1008/D | 88 | 1042/G | 113 |
| 1008/E | 65 | 1050 | 55 |
| 1008/E – HPL | 82 | 1051 • 1061 | 57 |
| 1008/E.50 | 66 | 1053 | 119 |
| 1010 | 42 | 1053/G | 121 |
| 1010.50 | 43 | 1054 | 53 |
| 1010/G | 99 | 1055 | 60 |
| 1011 | 44 | 1060 | 56 |
| 1012/D | 89 | 1060 • 1060/G – High-Current | 165 |
| 1012/E | 67 | 1060/G | 108 |
| 1012/E – HPL | 83 | 1060/G for Position Test | 109 |
| 1012/G | 100 | 1060/GT for Position Test | 110 |
| 1013/Z | 68 | 1061/G | 111 |
| 1015 | 45 | 1064 | 178 |
| 1015.50 | 46 | 1075 • 1075/G – High-Current | 166 |
| 1015/G | 101 | 1080/G – High-Current | 167 |
| 1015/G for Position Test | 102 | 2021 • 1021 | 74 |
| 1016 | 47 | 2024 • 1024 | 75 |
| 1016 – Fixture Customizing | 212 | 2028 • 1028 | 76 |
| 1018 | 48 | 2029 | 77 |
| 1018.06 | 49 | 2053 | 118 |
| 1021 • 1021/G – High-Current | 162 | 3003 | 129 |
| 1021/G | 103 | 3010/2 • 3010/10 | 130 |
| 1021/G for Position Test | 104 | 3010/2F | 131 |
| 1021/GT for Position Test | 105 | 3010/2G • 3010/10G | 145 |
| 1021/GV | 120 | 3010/2GW(5) | 146 |
| 1025.21 | 213 | 3010/2V | 133 |
| 1025/D | 90 | 3010/2W | 132 |

Series Index

| SERIES DESIGNATION | PAGE | SERIES DESIGNATION | PAGE |
|--------------------------------|------|----------------------------------|------|
| 3011/2FGS | 148 | 5257/G | 95 |
| 3011/2GS | 147 | 5265 | 156 |
| 3012/2GS | 143 | 5303 | 179 |
| 3012/2GS • FS1/FLS1 | 144 | 5305 | 180 |
| 3014/2G | 149 | 5310/G | 107 |
| 3015.06 | 134 | 5310/G – High-Current | 163 |
| 3015/G | 151 | 5322 – FKB – vertical | 190 |
| 3020/2 | 126 | 5322 – PKB – vertical | 191 |
| 3020/2G | 138 | 7840 • 7840/G PCB Contact | 198 |
| 3020/2GW5 | 139 | 7860 • 7860/G – Z1 | 199 |
| 3023/2GS | 140 | MM8130 • MM8430 • MS156 | |
| 3024 | 125 | 7860 • 7860/G – Z2 | 200 |
| 3024/2G | 141 | MM8130 • MM8430 • MS156 | |
| 3026/2W | 127 | 7860 • 7860/G – Z3 U.FL-m | 201 |
| 3028.01 | 154 | 7860 • 7860/G – Z4 R-SMA-m | 202 |
| 3030 | 128 | 7860 • 7860/G – Z5 MCX-f | 203 |
| 3030/GW3 | 142 | 7860 • 7860/G – Z6 SMA-f | 204 |
| 3035 | 124 | 7860 • 7860/G – Z7 SMB-m | 205 |
| 3214/2GW | 150 | 7860 • 7860/G – Z8 SMB-f | 206 |
| 4004 | 172 | 7860 • 7860/G – Z9 SMC-m | 207 |
| 4004/G | 174 | 7860 • 7860/G – Z20 FAKRA Socket | 209 |
| 4005 | 171 | 7860 • 7860/G – Z25 FAKRA Plug | 208 |
| 4006 | 170 | IF Contacts | 214 |
| 4034 | 173 | GK Contacts | 214 |
| 5082 | 185 | Receptacles 1012 | 78 |
| 5082.01 | 186 | Receptacles 1021/G | 114 |
| 5082/L | 187 | Receptacles 1025 | 79 |
| 5087 | 157 | Receptacles 1060/G | 115 |
| 5099 | 181 | Pneumatic Accessories | 175 |
| 5099.04 | 182 | SK 790 – PCB Marker Probe | 215 |
| 5099.43 | 183 | | |
| 5104 | 158 | | |
| 5110/S | 184 | | |
| 5110/G | 112 | | |
| 5110/S • 5110/G – High-Current | 164 | | |
| 5203 | 155 | | |
| 5207 | 194 | | |
| 5207/G | 195 | | |
| 5248/G | 94 | | |

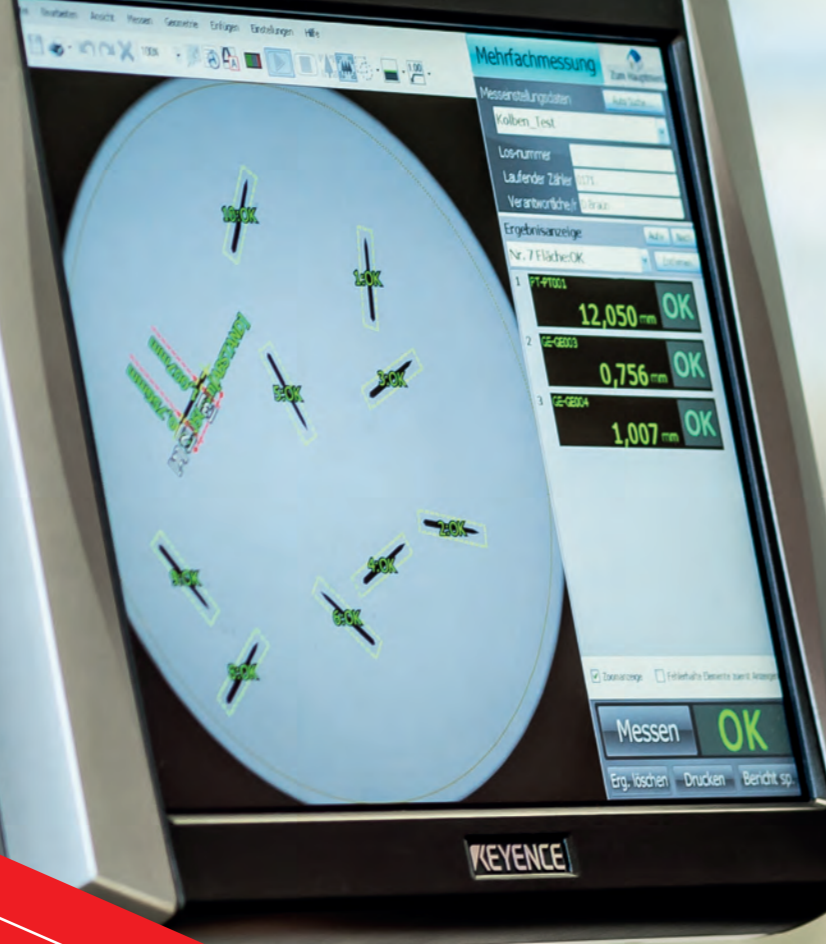

PTR HARTMANN –
QUALITY DOWN TO
THE TINIEST DETAIL



Imprint

PTR HARTMANN GmbH

Gewerbehof 38
59368 Werne, Germany
Phone +49 2389 7988-0
Fax +49 2389 7988-88
info@ptr-hartmann.com
www.ptr-hartmann.com

Design:

PTR HARTMANN GmbH
Databased-Publishing:
cybob communication GmbH
Creative Concept:
Christiane Luhmann
www.luhmannandfriends.com

Photos:

Tim Luhmann Fotografie & Film
iStockphoto.com

Print:

Bruns Druckwelt GmbH

Copyright:

PTR HARTMANN GmbH
subject to change, 09/2018

This catalogue replaces all earlier editions.

FSC® (Forest Stewardship Council®) | Climate neutral



The promotion of an environmentally friendly, socially beneficial and economically viable management of forests — this is the Forest Stewardship Council®'s (FSC®) mission. The FSC's logo must only be used in conjunction with wood products which come from sustainable forest use or which conserve the forest's resources.

In this way, the FSC and its system of certification actively support sustainability when it comes to dealing responsibly with our natural resources.

PTR HARTMANN GmbH supports this mission, and has printed this catalogue in accordance with the guidelines of the FSC directive.

Climate neutral



Carbon neutral printing means compensating for unavoidable carbon dioxide emissions by conserving them in other places when creating print media. The basis for this is an emissions balance which can be tracked in detail for the relevant print medium.

PTR's 2018 "Test Probe" catalogue has been produced in accordance with this guideline. The ID number can be used to track the emissions balance.