

Technical Data

Wire sizes		Insulating Material	
Solid min	0.2 mm ²	Material	PA 6.6
Solid max	4.0 mm ²	Flammability Class	UL 94 V-0
Stranded (flexible) min	0.2mm ²	Temperatures	
Stranded (flexible) max	2.5 mm ²	Operating Temperature (without mech. load)	-40 °C - 105 °C
Stranded with Ferrule min	0.25 mm ²	Store Temperature	-40 °C - 105 °C
Stranded with Ferrule max	2.5 mm ²	Wave Soldering Process	
Dimensions		Soldering Temperature, recommended	-
Stripped Length	6.0 mm	Peak Soldering Time, recommended	-
Materials		Reflow Process	
Clamp	Brass	Soldering Temperature, recommended	-
Screw	Steel	Peak Soldering Time, recommended	-
Contact Spring	Bronze		

Colours


	LIGHT GREY, RAL 7035
	GREEN, RAL 6018
	LIGHT GREEN, similar RAL 6018

Colours according to RAL, there may be variations on colour due to production conditions. Special colours on request.

Counterparts (Spacing 15.24 mm)

Pin Strip
STLZ960

In combination of connectors with different admission data, the lower value is valid.

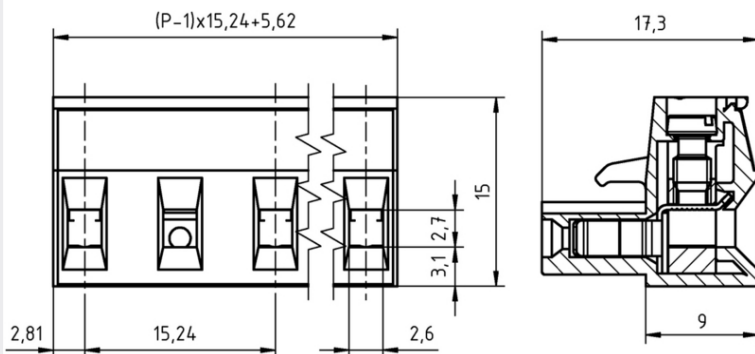

Order Data (Spacing 15.24 mm)

Poles	Width (mm)	Article Designation	Article Number	PU
2	20.86	AKZ960/2-15.24-GREEN	50960020061 D	50
3	36.10	AKZ960/3-15.24-GREEN	50960030061 D	50
4	51.34	AKZ960/4-15.24-GREEN	50960040061 D	50
5	66.58	AKZ960/5-15.24-GREEN	50960050061 D	50
6	81.82	AKZ960/6-15.24-GREEN	50960060061 D	50

Accessoires

Figure	Designation	Article Number
	Coding Star CS1-5.0/5.08-RED	Order Data: 50000000021
	Series AK(Z)960 with Separating Element	Order Data: on request
	Series AKZ960 with pull relief	Order Data: on request

Ratings

UseGroup	cRU [®] US			VDE	
	B	C	D		
Rated Voltage	600 V	600 V	-	630 V	
Rated Current	15 A	15 A	-	12 A	
Overvoltage Category				III	
Rated Wire Size				min	max
- solid	AWG 22-12	AWG 22-12	-	0.5 mm ² (5 A)	2.5 mm ² (12 A)
- stranded	AWG 22-12	AWG 22-12	-	0.5 mm ² (5 A)	2.5 mm ² (12 A)
Torque	0.80 Nm	0.80 Nm	-	0.50 Nm	
Screw Size	M3	M3	-	M3	
Test Voltage	2.20 kV	2.20 kV	-	6.0 kV	
Pollution Degree				3	