



Technical Data // Series FKB5457 - SMD

Interface Pin Blocks 100 mil / 2.54 mm

HIGHLIGHTS

Position horizontal

Short, compact size

Board-to-board contacting

Tape on Reel - SMD

2 to 12 poles available

MECHANICAL DATA

Center 2.54 mm/100 mil

Full Travel 2.00 mm

Working Travel 1.50 mm

Pre-loaded Spring Force 0.30 N

Spring Force at Working Travel 1.00 N

ELEKTRISCHE WERTE ELECTRICAL DATA

Max. Current Rating 3.5 A

Typical Continuity Resistance ≤ 20 mOhm

MATERIALS

Barrel Brass, gold-plated

Spring Spring Steel, gold-plated

Plunger Brass, gold-plated


Test Probe Block PA



Technical Data // Series FKB5457 - SMD

Interface Pin Blocks 100 mil / 2.54 mm



Soldering profile reflow

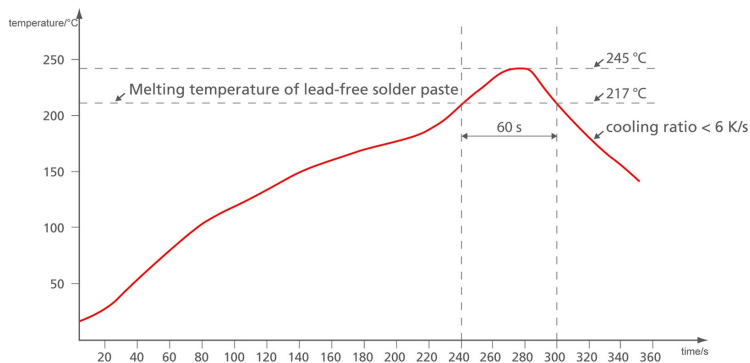

FKB5457/1

Pieces (PCS)

1600

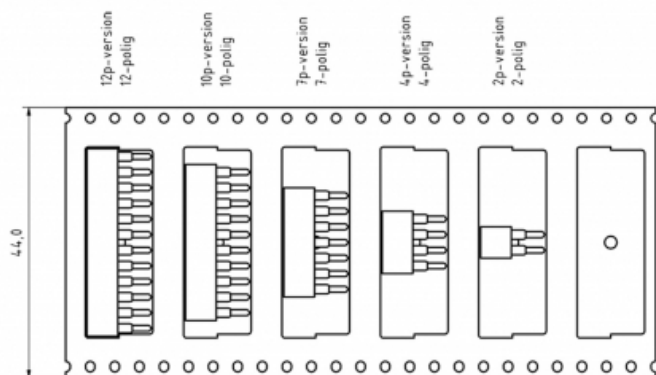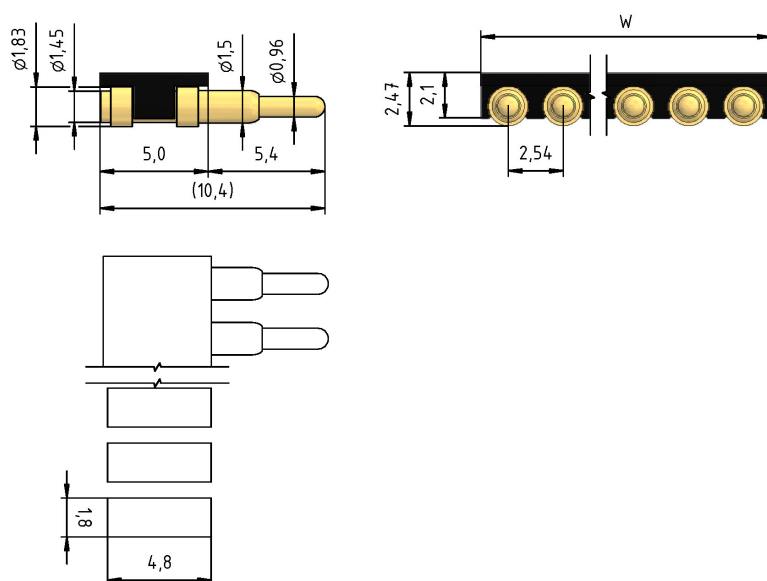

HOW TO ORDER

FKB5457 / 1 - 2 - 104

1 2 3 4

- 1. Series 2. Number of Rows 3. Number of Poles
- 4. Installation Height