

Series PKB5322 - SMD

- Short, compact size
- Board-to-board contacting
- Distance compensation
- Tape on Reel - SMD / Automated Assembly
- 2 to 20 poles / 1 and 2 rows available

Mechanical Data

Center 2.54 mm/100 mil

Electrical Data

Max. Current Rating 3.5 A

Typical Continuity Resistance $\leq 20 \text{ m}\Omega$


Typical Isolation Resistance $10^{10} \text{ Ohm}\cdot\text{m}$

Materials


Pad Contact Brass, gold-plated

Test Probe Block PA


Soldering profile reflow

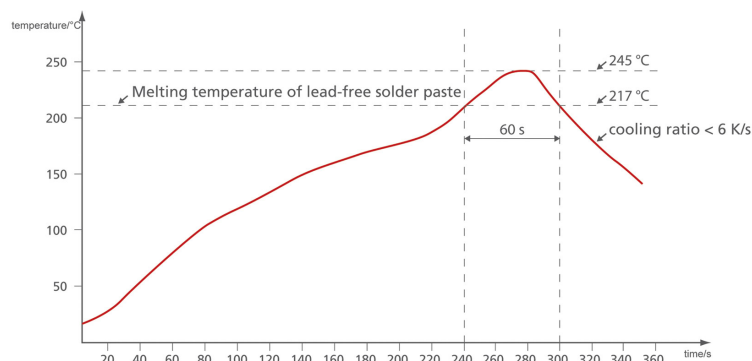

PKB5322/1

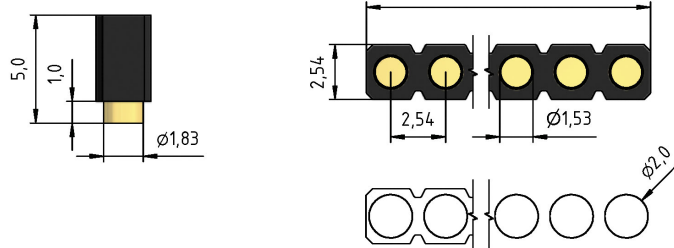

PKB5322/2

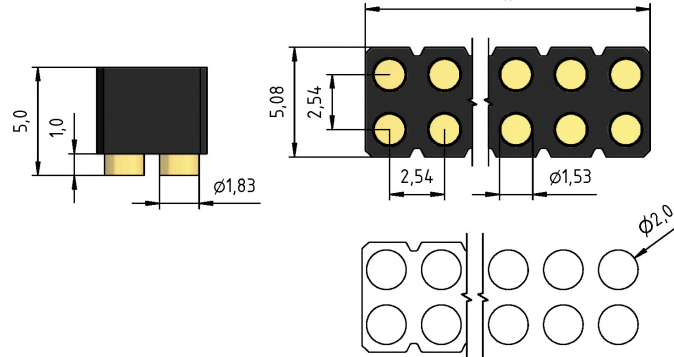

Tape-on-Reel (EN 60286-3)

Reel (RD /")	Width (R/mm)	Pitch (RP/mm)	Pieces (PCS)
15	24/44	16	800

How to Order

PKB5322 / 1 - 2 - 50 - R24

1 2 3 4 5

1. Series 2. Number of Rows 3. Number of Poles
4. Installation Height 5. Tape on Reel

